




Data sheet | Item number: 206-216

Variocrimp 16 crimping tool; for insulated and uninsulated ferrules; Crimping range: 6, 10 and 16 mm²

www.wago.com/206-216

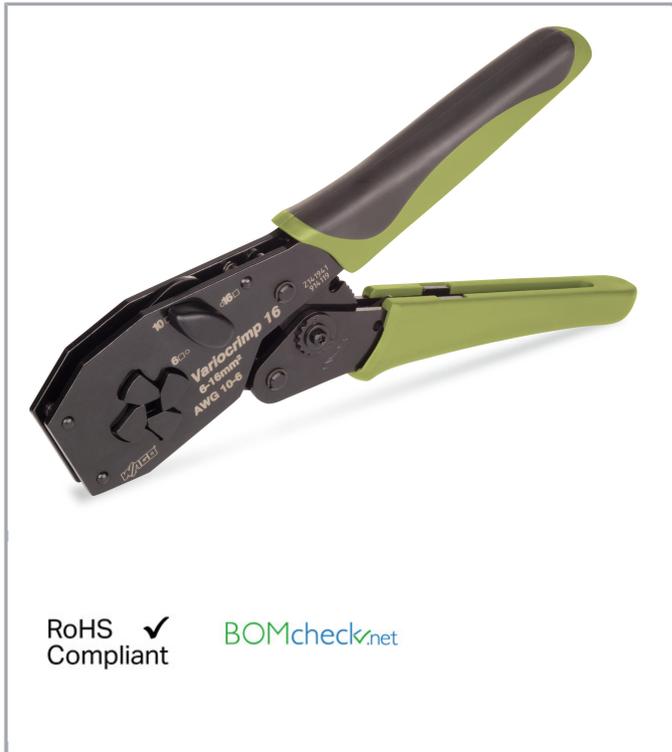

Item description

Note:

Application notes:

- With Variocrimp 16, it is necessary to select the wire gauge on the tool before crimping.
- Only one crimping station is needed to handle the specified conductor size range.
- Uniform, compact crimping on all four sides for high conductor retention.
- No need to center the conductor into the ferrule.
- Conductor and ferrule insertion possible from both sides (for left- and right-handers).
- Built-in ratchet mechanism ensures gas-tight crimp connection.
- Crimping tools open automatically after crimping operation is complete.
- Ergonomical handles.

What is a "gas-tight" connection?

Subject to changes. Please also observe the further product documentation!

This item has been discontinued and as of 30.07.2019, can no longer be delivered.



Data sheet | Item number: 206-216

www.wago.com/206-216

In a gas-tight connection, the conductor and the ferrule are compressed, eliminating all spaces. Under normal atmospheric conditions, neither a liquid nor gaseous medium can penetrate the crimped connection.

Oxidation between crimped single conductors is prevented, virtually eliminating the possibility of any increase in the crimped connection's resistance. In some exceptional cases, minute, isolated spaces may be present. However, these instances can be considered as closed off due to the twisted conductor.

Inadequate crimping can allow the conductor to be pulled out of the connection. Hollow spaces also remain, permitting oxidation formation and leading to an increase in contact resistance.

Elevated resistance is detrimental for signal transmission, as the signal flow is damped (weakened), and for power transmission, as power loss and, hence a temperature increase due to contact (risk of fire) can result.

Crimping tools with built-in ratchets are recommended, such as the **WAGO crimping tools**. These tools only open after the crimping process has been fully completed. Space-saving crimping from all four sides is ideal for spring clamp termination.

Cross section data for ferruled conductors indicated for WAGO products is based on this crimping method.

Data

Technical Data

Main product function	Crimping tools
-----------------------	----------------

Material Data

Weight	579.5 g
--------	---------

Commercial data

Product Group	14 (Tools)
Packaging type	BOX
Country of origin	SE
GTIN	4055143133104
Customs Tariff No.	8203200000

Counterpart

Compatible products

tools



Item no.: 206-210
Ratchet spring

www.wago.com/206-210

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

This item has been discontinued and as of 30.07.2019, can no longer be delivered.



Data sheet | Item number: 206-216

www.wago.com/206-216



Item no.: 206-213
Retaining spring

www.wago.com/206-213

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.