

Data sheet | Item number: 211-861

Conductor markers for thread-on mounting; for Smart Printer; 5 x 10.5 mm;
white



www.wago.com/211-861



Data

Technical Data

Suitable	for wire cross-section 0.75 ... 1.5 mm ²
Marking	plain
Marking	plain
Units per delivery form	1000 pcs/reel
Features	for conductor cross-sections 0.75 ... 1.5 mm ²
Marking device	Smart Printer (Thermal Transfer Printer)

Geometrical Data

Depth	0,22 mm
Marking surface	5 x 23 mm

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Mechanical data

Mounting type	Sliding
Smear resistance	smudge-proof in conjunction with 258-5005 Ink Ribbon

Material Data

Color	white
Material	Polyester
UV resistance	per EN 60068-2-5:2010 Procedure B
Halogen-free	Yes
Weight	250 g

Environmental Requirements

Surrounding air (operating) temperature	-40 ... 150 °C
Relative humidity	40 ... 50 %

Commercial data

Product Group	2 (Terminal Block Accessories)
Packaging type	BOX
Country of origin	DE
GTIN	4050821688655
Customs Tariff No.	39269097900

Counterpart

Compatible products

Marking accessories



Item no.: 258-5000

Thermal transfer printer; Smart Printer; for complete control cabinet marking; 300 dpi

www.wago.com/258-5000

Downloads

Documentation

Additional Information

211-861, Information on handling print material	V004.08.2017	pdf 1.6 MB	Download
---	--------------	---------------	----------

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden


Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

Installation Notes

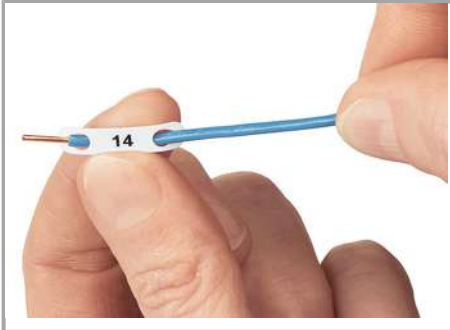

Conductor marker for thread-on mounting

Subject to changes. Please also observe the further product documentation!