


Data sheet | Item number: 221-501

Mounting carrier; for Ex applications; 221 Series - 4 mm²; for DIN-35 rail mounting/screw mounting; light gray

www.wago.com/221-501

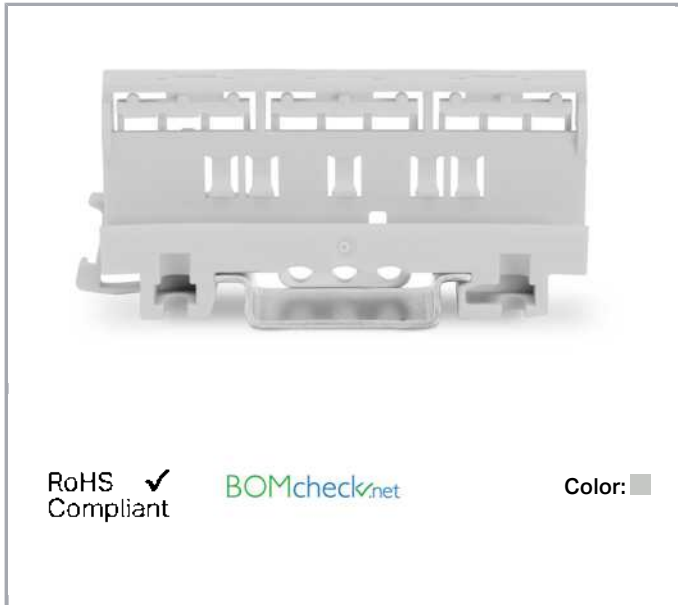

Data

Geometrical Data

Width	17,5 mm / 0.689 inch
Height from upper-edge of DIN-35 rail	25,5 mm / 1.004 inch
Depth	67,2 mm / 2.646 inch

Material Data

Color	light gray
Insulating material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Fire load	0.289 MJ
Weight	9.6 g

Commercial data

Packaging type	BOX
Country of origin	CN
GTIN	4055143753449

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Customs Tariff No.

39269097900

Counterpart

Downloads Documentation

Bid Text

221-501 GAEB docx - Datei	May 21, 2019	docx 14.8 kB	Download
------------------------------	--------------	-----------------	----------

221-501 GAEB X81 - Datei	May 21, 2019	xml 2.9 kB	Download
-----------------------------	--------------	---------------	----------

Additional Information

Technical explanations	Apr 3, 2019	pdf 2.1 MB	Download
------------------------	-------------	---------------	----------


Installation Notes




Removing a conductor.

Installation


Subject to changes. Please also observe the further product documentation!

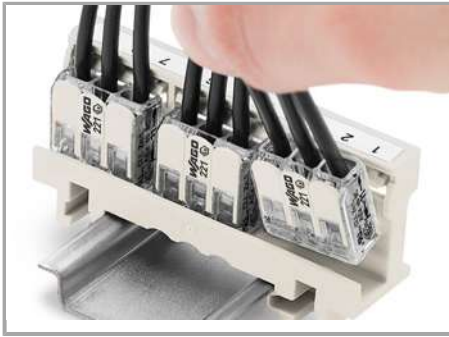

Inserting a connector into the mounting carrier.

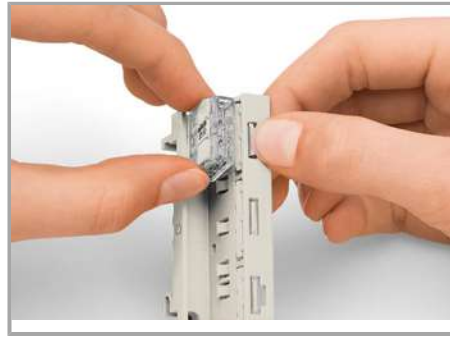


Removing a connector from the mounting carrier.

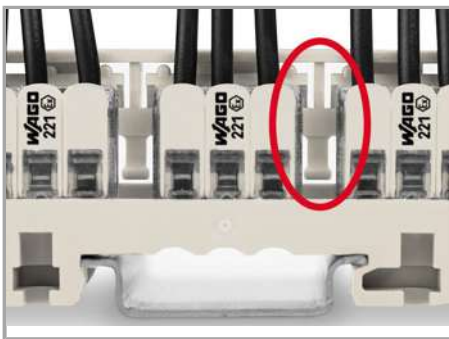


Mounting type (440 V)
Using spacers between the connectors.




Mounting type (440 V)
Vertical mounting on DIN-35 rail

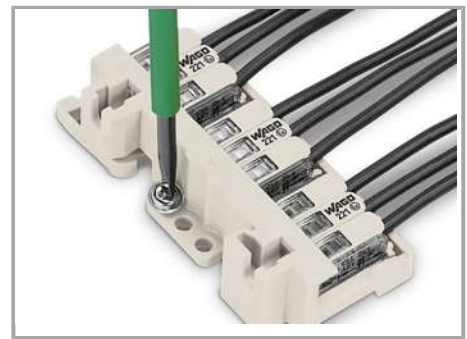


Mounting type (440 V)
Horizontal screw mounting on a flat surface

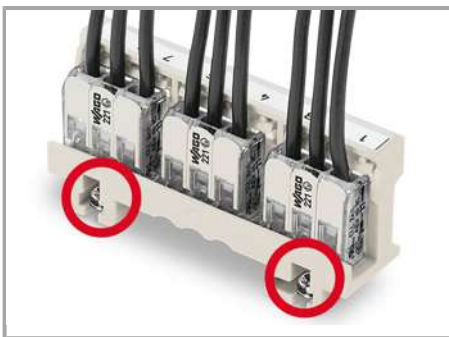

Mounting type (440 V)
Mounting the carrier via non-conductive screws.

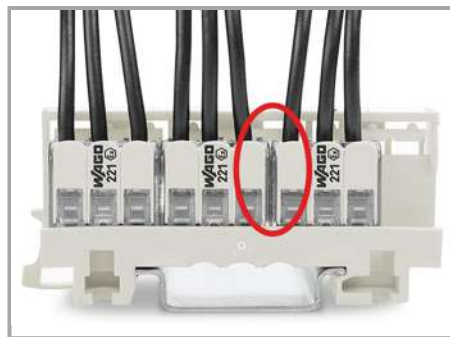


Mounting type (275 V)
No spacers are used between the connectors.

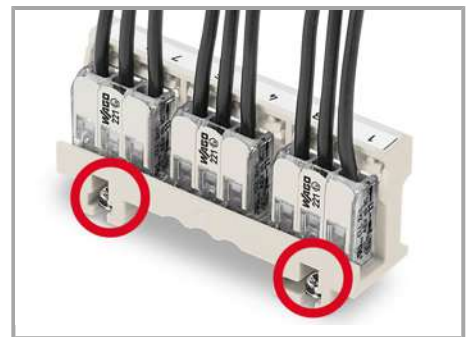

Mounting type (275 V)
Mounting the carrier using conductive screws.

Subject to changes. Please also observe the further product documentation!

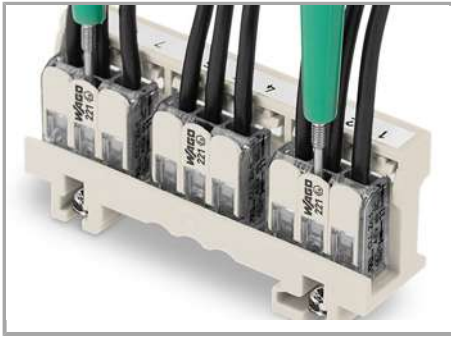

Easily test inserted connectors in the carrier
– without considering the type of mounting.

Subject to changes. Please also observe the further product documentation!