


Data sheet | Item number: 221-511

Mounting carrier; for Ex applications; 221 Series - 6 mm²; for DIN-35 rail mounting/screw mounting; light gray

www.wago.com/221-511

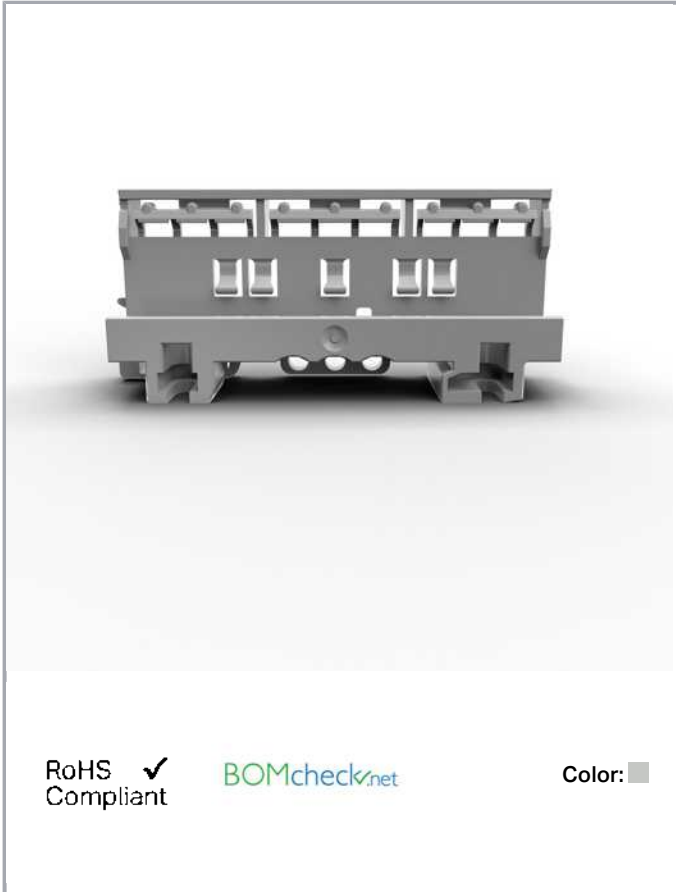

Data

Geometrical Data

Width	19,3 mm / 0.76 inch
Height from upper-edge of DIN-35 rail	28,3 mm / 1.114 inch
Depth	80,8 mm / 3.181 inch

Material Data

Color	light gray
Insulating material	Polyamide 66 (PA 66)
Flammability class per UL94	V0

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Fire load	0.357 MJ
Weight	11.9 g

Commercial data

Packaging type	BOX
Country of origin	CN
GTIN	4055143852135
Customs Tariff No.	39269097900

Counterpart

Downloads

Documentation

Additional Information

Technical explanations	Apr 3, 2019	pdf 2.1 MB	Download
------------------------	-------------	---------------	----------


Installation Notes




Removing a conductor.

Installation


Subject to changes. Please also observe the further product documentation!

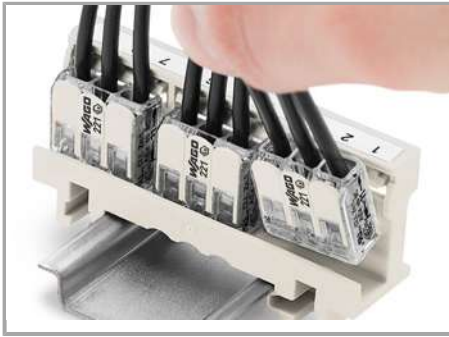

Inserting a connector into the mounting carrier.

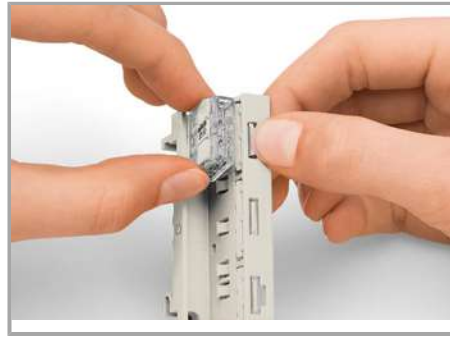


Removing a connector from the mounting carrier.

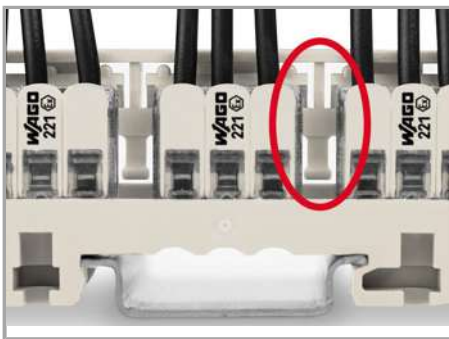


Mounting type (440 V)
Using spacers between the connectors.




Mounting type (440 V)
Vertical mounting on DIN-35 rail

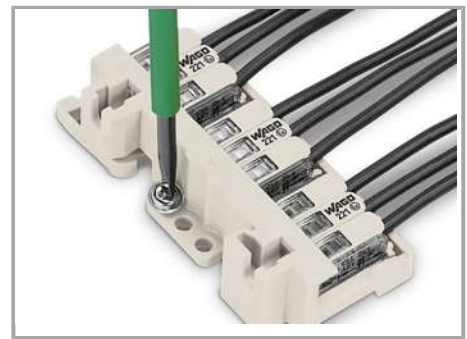


Mounting type (440 V)
Horizontal screw mounting on a flat surface

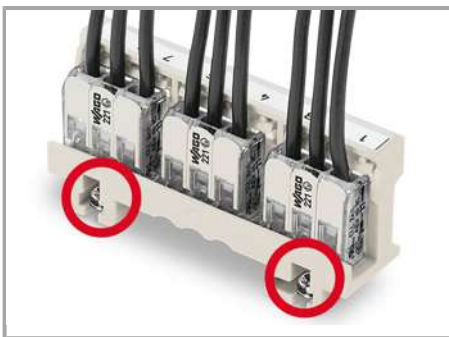

Mounting type (440 V)
Mounting the carrier via non-conductive screws.

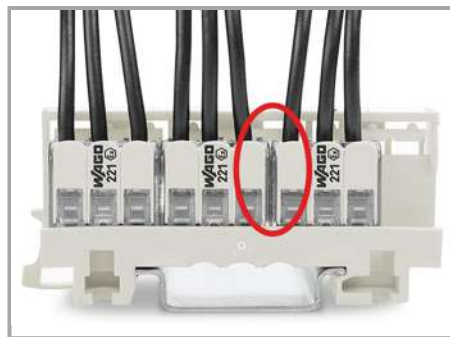


Mounting type (275 V)
No spacers are used between the connectors.

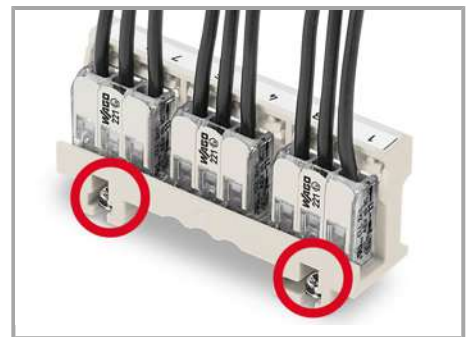

Mounting type (275 V)
Mounting the carrier using conductive screws.

Subject to changes. Please also observe the further product documentation!

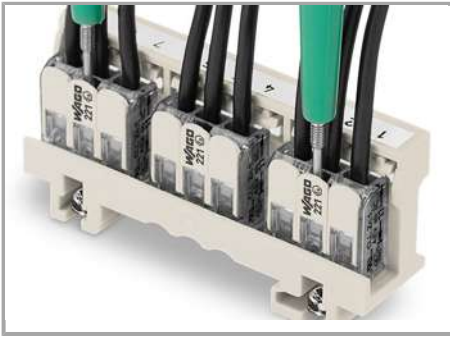

Easily test inserted connectors in the carrier
– without considering the type of mounting.

Subject to changes. Please also observe the further product documentation!