


Data sheet | Item number: 231-131

Operating tool; made of insulating material; 1-way; loose; white

www.wago.com/231-131



Color: 

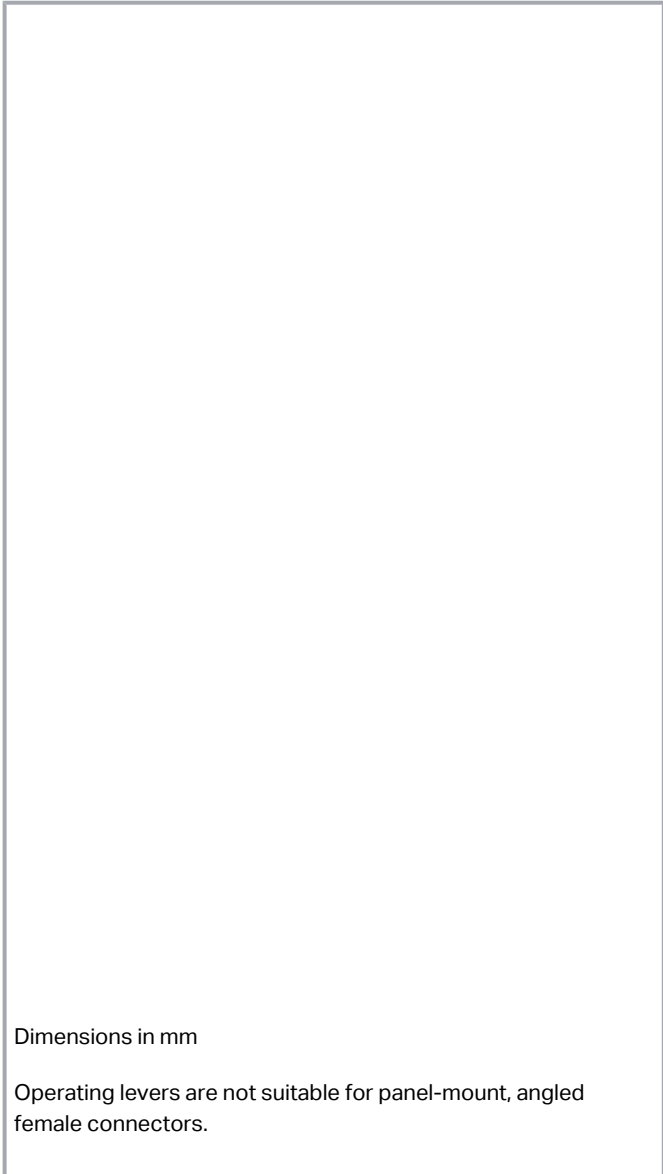

Dimensions in mm

Operating levers are not suitable for panel-mount, angled female connectors.

Data

Technical data

Main product function

Operating tool

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Number of pitches	1 -way
-------------------	--------

Physical data

Depth	20.2 mm / 0.79 inch
Pin spacing	5/7.62 mm

Mechanical data

Suitable	for male and female connectors with CAGE CLAMP® connection
----------	--

Material data


Color	white
Insulation material	Glass fiber-reinforced polyamide (PA66 GF)
Fire load	0.01 MJ
Weight	0.3 g

Commercial data

Product Group	3 (Multi Conn. System)
PU (SPU)	100 (25) Stück
Packaging type	box
Country of origin	DE
GTIN	4017332283168
Customs tariff number	3926909985

Approvals / Certificates

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	CSA DEKRA Certification B.V.	C22.2	1466354

Ship Approvals

Logo	Approval	Additional Approval Text	Certificate name
	LR Lloyds Register	IEC 61984	96/20035 (E5)

Subject to changes. Please also observe the further product documentation!



Downloads

CAD files

CAD data

2D/3D Models 231-131	URL	Download
----------------------	---------------------	--------------------------

CAE data

ZUKEN Portal 231-131	URL	Download
----------------------	---------------------	--------------------------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 231-131	URL	Download
--	---------------------	--------------------------

Operating tool; made of insulating material; 1-way; loose; white

Installation Notes



Inserting a conductor into CAGE CLAMP® unit via operating lever (231-291).

Subject to changes. Please also observe the further product documentation!