


Data sheet | Item number: 231-500

Spacer; for formation of groups; light gray

www.wago.com/231-500

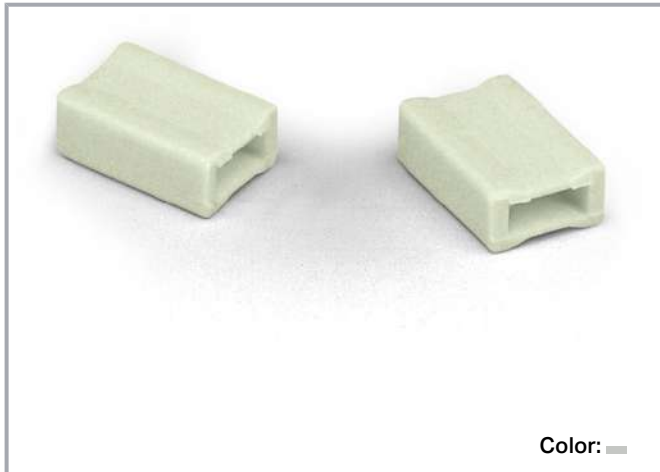

Data

Mechanical data

Suitable	for male connectors; for group formation
----------	--

Material data

Color	light gray
Fire load	0.002 MJ
Weight	0.1 g

Commercial data

Product Group	3 (Multi Conn. System)
PU (SPU)	200 (100) Stück
Packaging type	box
Country of origin	DE
GTIN	4017332119924
Customs tariff number	3926909985

Approvals / Certificates


Country specific Approvals

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Logo	Approval	Additional Approval Text	Certificate name
	CSA DEKRA Certification B.V.	C22.2	1466354

Downloads

Documentation

Additional Information

Technical explanations	2019 Apr 3	pdf 2.0 MB	Download
------------------------	------------	---------------	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 231-500 Spacer; for formation of groups; light gray	URL	Download
---	-----	----------


Installation Notes

Installation

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

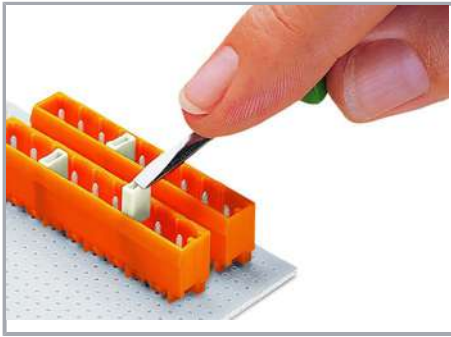

Inserting separators for group formation directly into MCS MIDI Classic Male Headers.

Group formation using separators means that pole count is reduced by at least one pole.

Female connectors with integrated end plates and 5/5.08 mm pin spacing are available for group formation without loss of poles. Formation of groups without the loss of any poles is possible without using separators for 7.5/7.62 mm pin spacing.

Subject to changes. Please also observe the further product documentation!