

Data sheet | Item number: 231-669

Lockout caps; for covering unused clamping units; orange

www.wago.com/231-669



Data

Mechanical data

Suitable

for male and female connectors with CAGE CLAMP® connection

Material data

Color	orange
Fire load	0.003 MJ
Weight	0 g

Commercial data

Product Group	3 (Multi Conn. System)
PU (SPU)	500 (100) Stück
Packaging type	box
Country of origin	DE
GTIN	4017332121156
Customs tariff number	3926909985

Approvals / Certificates


Country specific Approvals

Subject to changes. Please also observe the further product documentation!


WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Logo	Approval	Additional Approval Text	Certificate name
	CSA DEKRA Certification B.V.	C22.2	1466354

Ship Approvals

Logo	Approval	Additional Approval Text	Certificate name
	LR Lloyds Register	IEC 61984	96/20035 (E5)

Downloads

Documentation

Additional Information

Technical explanations	2019 Apr 3	pdf 2.0 MB	Download
------------------------	------------	---------------	----------

CAD files

CAD data

2D/3D Models 231-669	URL	Download
----------------------	-----	----------

CAE data

ZUKEN Portal 231-669	URL	Download
----------------------	-----	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 231-669 Lockout caps; for covering unused clamping units; orange	URL	Download
--	-----	----------


Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
 Germantown, WI 53022
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
 Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.

Installation

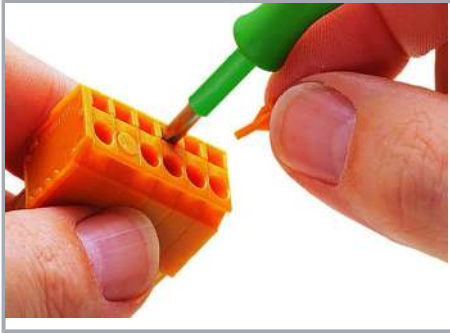

Covering unused clamping units in CAGE CLAMP®-equipped male and female connectors (e.g., when doubling the pin spacing to meet clearance and creepage distance requirements, or when a higher rated voltage is required). Lockout pins are not suitable for panel-mount, angled female connectors.

Subject to changes. Please also observe the further product documentation!