


## Data sheet | Item number: 231-903

Jumper; for conductor entry; 3-way; insulated; gray

[www.wago.com/231-903](http://www.wago.com/231-903)

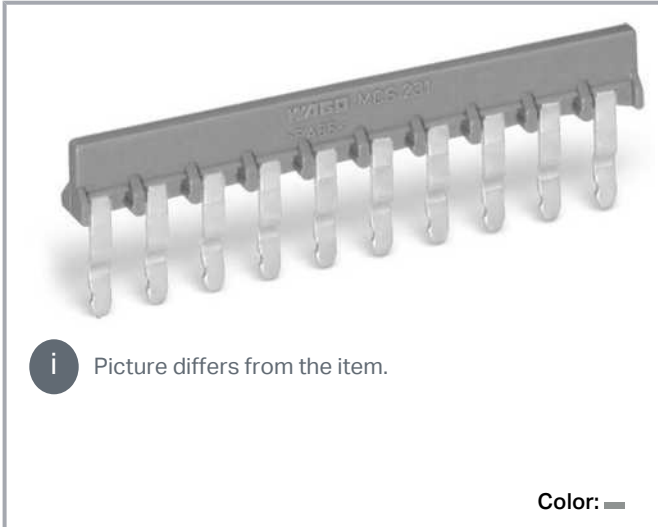

### Data

#### Electrical data

#### IEC Approvals

Ratings per	IEC/EN 60664-1
Rated voltage (III/2)	320 V
Rated surge voltage (III/2)	4 kV
Rated current	16 A
Legend (ratings)	(III / 2) $\hat{=}$ Overvoltage category III / Pollution degree 2

#### Connection data

##### Connection 1

Number of poles	3
-----------------	---

#### Physical data

Pin spacing	5/5.08 mm / 0.197/0.2 inch
Width	15.3 mm / 0.602 inch

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

Depth	6.15 mm / 0.242 inch
-------	----------------------

### Mechanical data

Suitable	for male and female connectors with CAGE CLAMP® connection
----------	--

### Material data


Color	gray
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.008 MJ
Weight	0.7 g

### Commercial data

Product Group	3 (Multi Conn. System)
PU (SPU)	100 (25) Stück
Packaging type	box
Country of origin	DE
GTIN	4045454565848
Customs tariff number	8536698000

### Approvals / Certificates

#### Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	CSA DEKRA Certification B.V.	C22.2	1466354

### Downloads

#### Documentation

#### Additional Information

Technical explanations	2019 Apr 3	pdf 2.0 MB	Download
------------------------	------------	---------------	----------

Subject to changes. Please also observe the further product documentation!

## Environmental Product Compliance

### Compliance Search


Environmental Product Compliance 231-903  
Jumper; for conductor entry; 3-way; insulated; gray

URL

Download

## Installation Notes


### Installation

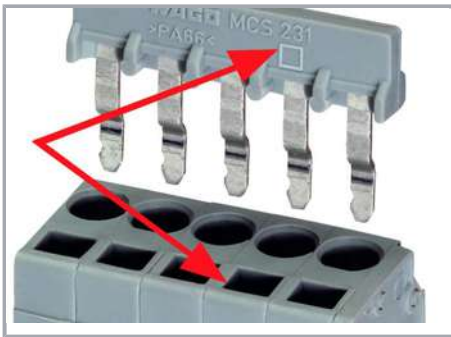

Notice: Insert jumper bar according to direction of symbols.

□ symbol correlates to the direction of the operating slot.

### Installation

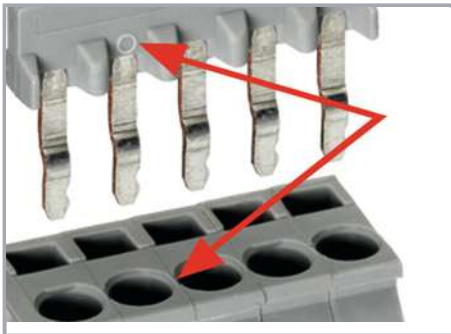


Notice: Insert jumper bar according to direction of symbols.

○ symbol shows direction to conductor entry.

## Coding

Subject to changes. Please also observe the further product documentation!

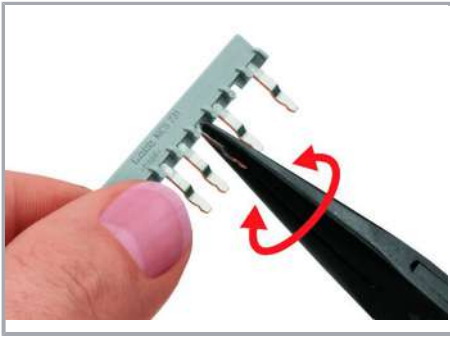


Custom comb-style jumper bars are created by breaking off jumper contacts (3 contacts and more).

#### Installation



Notice: Comb-style jumper bars reduce the conductor cross-section to 1.5 mm<sup>2</sup> "s" + "f-st."


#### Installation

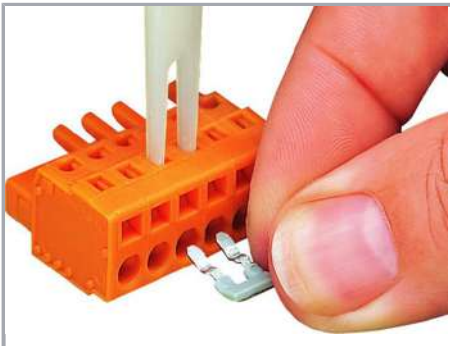

Operating tool for comb-style jumper bars (231-902)

Subject to changes. Please also observe the further product documentation!

#### Application

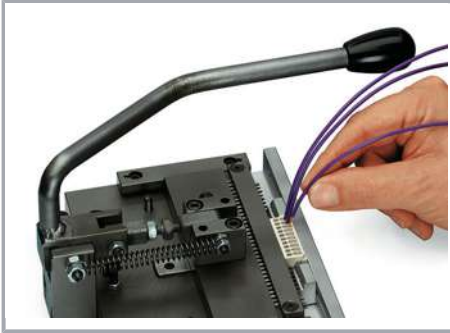

Both male and female connectors can be pre-assembled with comb-style jumper bars upon request.

Subject to changes. Please also observe the further product documentation!