


Data sheet | Item number: 231-907

Jumper; for conductor entry; 7-way; insulated; gray

www.wago.com/231-907

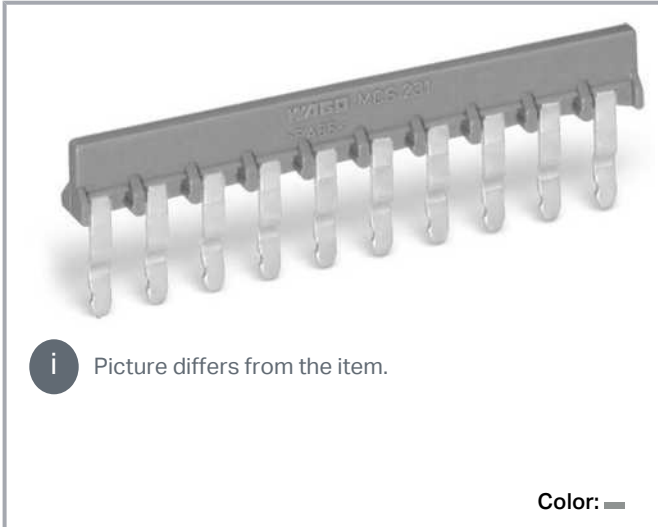

Data

Electrical data

IEC Approvals

Ratings per	IEC/EN 60664-1
Rated voltage (III/2)	320 V
Rated surge voltage (III/2)	4 kV
Rated current	16 A
Legend (ratings)	(III / 2) $\hat{=}$ Overvoltage category III / Pollution degree 2

Connection data

Connection 1

Number of poles	7
-----------------	---

Physical data

Pin spacing	5/5.08 mm / 0.197/0.2 inch
Width	35.3 mm / 1.39 inch

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Depth	6.15 mm / 0.242 inch
-------	----------------------

Mechanical data

Suitable	for male and female connectors with CAGE CLAMP® connection
----------	--

Material data


Color	gray
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.015 MJ
Weight	1.7 g

Commercial data

Product Group	3 (Multi Conn. System)
PU (SPU)	100 (25) Stück
Packaging type	box
Country of origin	DE
GTIN	4045454565862
Customs tariff number	8536698000

Approvals / Certificates

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	CSA DEKRA Certification B.V.	C22.2	1466354

Downloads

Documentation

Additional Information

Technical explanations	2019 Apr 3	pdf 2.0 MB	Download
------------------------	------------	---------------	----------

Subject to changes. Please also observe the further product documentation!

Environmental Product Compliance

Compliance Search


Environmental Product Compliance 231-907
Jumper; for conductor entry; 7-way; insulated; gray

URL

Download

Installation Notes


Installation

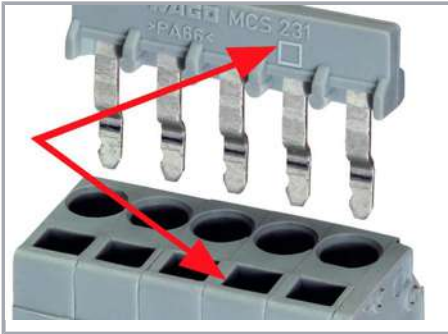

Notice: Insert jumper bar according to direction of symbols.

□ symbol correlates to the direction of the operating slot.

Installation

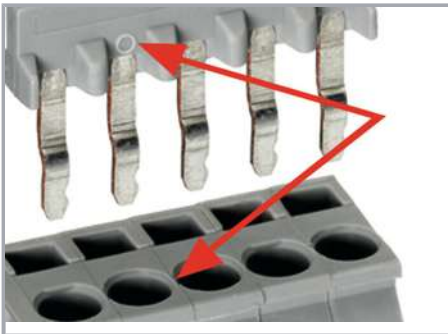


Notice: Insert jumper bar according to direction of symbols.

○ symbol shows direction to conductor entry.

Coding

Subject to changes. Please also observe the further product documentation!

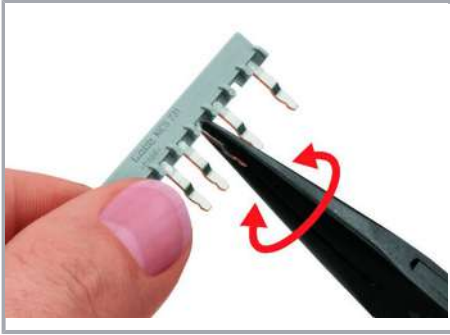


Custom comb-style jumper bars are created by breaking off jumper contacts (3 contacts and more).

Installation



Notice: Comb-style jumper bars reduce the conductor cross-section to 1.5 mm² "s" + "f-st."


Installation

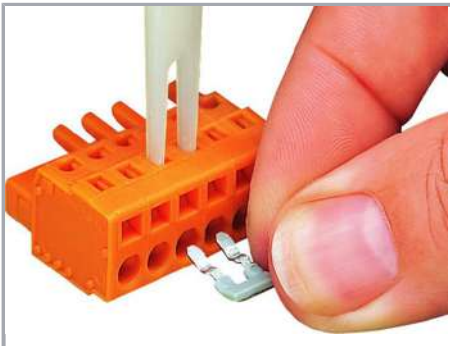

Operating tool for comb-style jumper bars (231-902)

Subject to changes. Please also observe the further product documentation!

Application

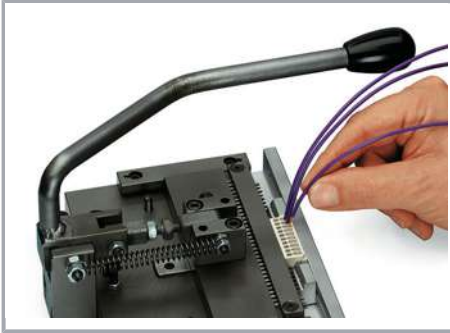

Both male and female connectors can be pre-assembled with comb-style jumper bars upon request.

Subject to changes. Please also observe the further product documentation!