
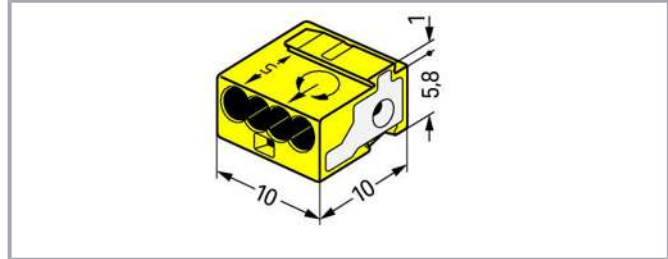


## Data sheet | Item number: 243-514

4-conductor modular PCB connector; PUSH WIRE®; 0.8 mm Ø; Pin spacing 5.75 mm; 1-pole; for individual solder pins; for KNX; yellow

[www.wago.com/243-514](http://www.wago.com/243-514)

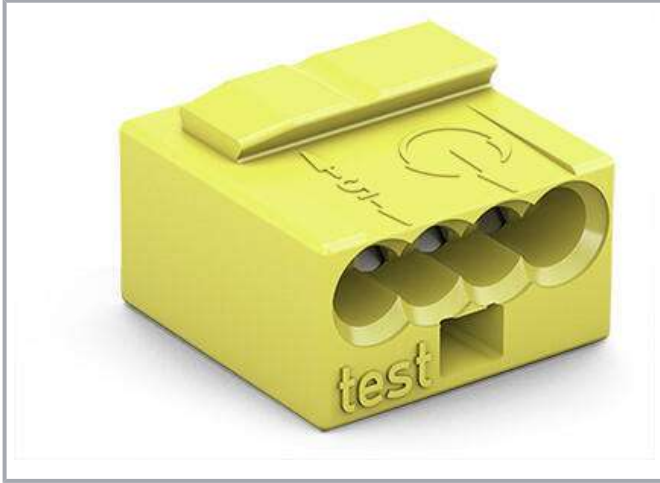

### Data

#### Connection data

#### Connection 1

Connection technology	PUSH WIRE®
Conductor diameter	0.6 ... 0.8 mm
Conductor diameter (note)	When using different conductor diameters
Strip length	5 ... 6 mm / 0.2 ... 0.24 inch
Number of poles	4

#### Connection 2

Conductor diameter 2	1 mm
Conductor diameter (note) 2	When using identical conductor diameters

### Approvals / Certificates

#### Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	CCA	EN 60998	NTR NL

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



DEKRA Certification B.V.

7812



CSA  
DEKRA Certification B.V.

C22.2

70048857




KEMA/KEUR  
DEKRA Certification B.V.

EN 60998

71-  
112493

#### UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	UR Underwriters Laboratories Inc.	UL 1059	E45172

#### Downloads

##### Documentation

##### Additional Information

Technical explanations	2019 Apr 3	pdf 2.0 MB	Download
------------------------	------------	---------------	----------

#### Installation Notes

Subject to changes. Please also observe the further product documentation!