

Subject to changes. Please also observe the further product documentation!

Item description

- Compact Combi PCB terminal blocks ideal for automated wiring in the lighting industry
- Low conductor insertion forces
- PUSH WIRE[®] and IDC connections – ideal for automated wiring systems.

Data

Electrical data

Ratings per IEC/EN 60664-1

Ratings per	IEC/EN 60664-1
Rated voltage (III / 3)	320 V
Rated impulse voltage (III / 3)	4 kV
Rated voltage (III / 2)	320 V
Rated impulse voltage (III / 2)	4 kV
Rated voltage (II / 2)	630 V
Rated impulse voltage (II / 2)	4 kV
Rated current	6 A
Legend (ratings)	(III / 2) $\hat{=}$ Overvoltage category III / Pollution degree 2

Approvals per UL 1059

Rated voltage UL (Use Group B)	300 V
Rated current UL (Use Group B)	4 A
Rated voltage UL (Use Group D)	300 V
Rated current UL (Use Group D)	4 A
Approvals per	UL 1059

Connection data

Connection technology	PUSH WIRE [®]
Number of connection points (connection type)	1
Actuation type	Operating tool
Solid conductor	0,5 ... 1 mm ² / 20 ... 18 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inch
Conductor entry angle to the PCB	0°
No. of poles	6
Connection technology 2	IDC

Subject to changes. Please also observe the further product documentation!



Number of connection points	1
Solid conductor (2)	0,5 mm ² / 20 AWG
Fine-stranded conductor (2)	0,75 mm ² / 18 ... 18 AWG
Note (conductor cross-section) 2	IDC connection: PVC insulation, single
Strip length (2)	7.5 ... 8.5 mm / 0.3 ... 0.33 inch
Conductor entry angle to the PCB 2	0°
Total number of connection points	6
Total number of potentials	6
Number of connection types	2
Number of levels	2
Note (conductor cross-section)	IDC-Anschluss: PVC-Isolierung, einfach

Geometrical Data

Pin spacing	3,5 mm / 0.138 inch
Width	21,9 mm / 0.862 inch
Height	15,5 mm / 0.61 inch
Height from the surface	12,3 mm / 0.484 inch
Depth	13,3 mm / 0.524 inch
Solder pin length	3.2 mm
Solder pin dimensions	0,5 x 0,75 mm
Drilled hole diameter (tolerance)	1,1 ^(+0,1) mm

Mechanical data

Design	Low Version
--------	-------------

PCB contact

PCB contact	THT
Solder pin arrangement	over the entire terminal strip (staggered)
Number of solder pins per potential	1

Material Data

Color	white
Material group	I
Insulating material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Clamping spring material	Chrome nickel spring steel (CrNi)

Subject to changes. Please also observe the further product documentation!

Contact material	Copper alloy
Contact plating	tin-plated
Fire load	0.048 MJ
Weight	2.4 g

Environmental Requirements


Limit temperature range	-60 ... +105 °C
-------------------------	-----------------

Commercial data


Product Group	4 (Printed Circuit)
Packaging type	BOX
GTIN	4045454673611

Approvals / Certificates

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	CCA DEKRA Certification B.V.	EN 60998	NTR-NL 6286
	CCA DEKRA Certification B.V.	EN 60998	2110204.10
	VDE VDE Prüf- und Zertifizierungsinstitut	EN 60998	40028031

UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL UL International Germany GmbH	UL 1059	20160630- E45172

Counterpart

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.

Compatible products

tools

	Item no.: 206-830 Disconnection tool	www.wago.com/206-830
	Item no.: 206-831 Operating tool	www.wago.com/206-831

Downloads

Documentation

Additional Information

Technical explanations	Apr 3, 2019	pdf 3.6 MB	Download
------------------------	-------------	---------------	----------

CAD/CAE-Data

CAD data

2D/3D Models 251-306	URL	Download
----------------------	-----	----------

CAE data

EPLAN Data Portal 251-306	URL	Download
---------------------------	-----	----------

PCB Design

Symbol and Footprint 251-306	URL	Download
------------------------------	-----	----------

CAX data for your PCB design, consisting of "schematic symbols and PCB footprints", allow easy integration of the WAGO component into your development environment.

Supported formats:

- Accel EDA 14 & 15
- Altium 6 to current version
- Cadence Allegro
- DesignSpark
- Eagle Libraries
- KiCad
- Mentor Graphics BoardStation
- Mentor Graphics Design Architect


—
Subject to changes. Please also observe the further product documentation!

- Mentor Graphics Design Expedition 99 and 2000
- OrCAD 9.X PCB and Capture
- PADS PowerPCB 3, 3.5, 4.X, and 5.X
- PADS PowerPCB and PowerLogic 3.0
- PCAD 2000, 2001, 2002, 2004, and 2006
- Pulsonix 8.5 or newer
- STL
- 3D STEP
- TARGET 3001!
- View Logic ViewDraw
- Quadcept
- Zuken CadStar 3 and 4
- Zuken CR-5000 and CR-8000

PCB Component Libraries (EDA), PCB CAD Library Ultra Librarian

Installation Notes

Conductor termination

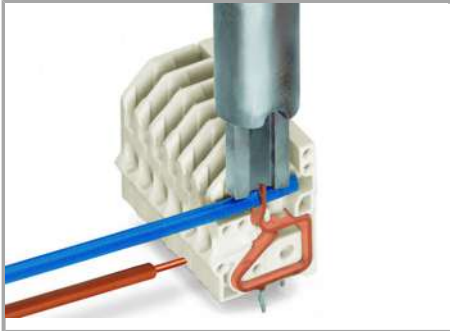


Conductor termination:

PUSH WIRE®: Simply push in conductor.

IDC: Push in conductor via 206-831
Operating Tool.

Conductor removal

Subject to changes. Please also observe the further product documentation!

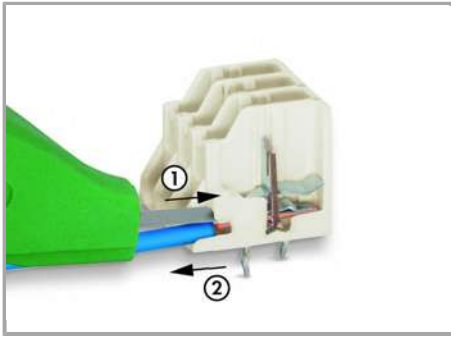

Conductor removal:

PUSH WIRE®: Twist conductor and pull out, or fully insert 206-830 Disconnection Tool over the conductor (1) and pull it out (2).

IDC: Pull up vertically on conductor to remove it (10x reconnection cycles possible when used properly – before re-using, cut off old contact point from conductor).

Subject to changes. Please also observe the further product documentation!