


This item has been discontinued.



Data sheet | Item number: 273-102

CLASSIC Junction Box Connector; for solid conductors; max. ambient operating temp. 60 °C; 2,50 mm²; dark gray

www.wago.com/273-102

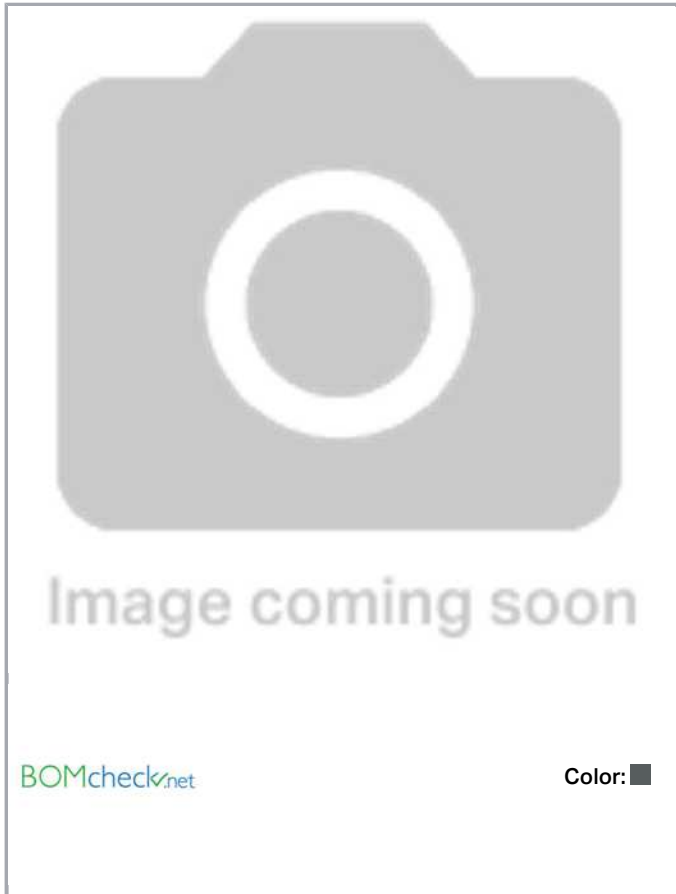

Data

Electrical data

Ratings per IEC/EN 60664-1

Rated voltage (II / 2)	400 V
Rated impulse voltage (II / 2)	4 kV
Rated current	24 A
Legend (ratings)	(II / 2) ≙ Overvoltage category II / Pollution degree 2

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

This item has been discontinued.



Data sheet | Item number: 273-102

www.wago.com/273-102

Connection data

Actuation type	Push-in
Solid conductor	1 ... 2.5 mm ² / 14 ... 12 AWG
Strip length	10 ... 13 mm / 0.39 ... 0.51 inch
Total number of connection points	4
Total number of potentials	1
Type of wiring	Side-entry wiring

Geometrical Data

Width	17.5 mm / 0.689 inch
Height	9.6 mm / 0.378 inch
Depth	19.5 mm / 0.768 inch

Material Data

Color	dark gray
Fire load	0.046 MJ
Weight	2.7 g

Environmental Requirements

Surrounding air (operating) temperature	60 °C
Continuous operating temperature	105 °C

Commercial data

Product Group	7 (Push Wire Conn.)
Packaging type	BOX
Country of origin	DE
GTIN	4044918450645
Customs Tariff No.	85369010000

Approvals / Certificates

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	CCA UL International Demko A/S	EN 60998	CCA-2612

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

This item has been discontinued.







Data sheet | Item number: 273-102

www.wago.com/273-102

CCA

	FIMKO SGS Fimko Ltd.	EN 60998	29339
	NEMKO NEMKO AS	EN 60998	P08208775 (60998-2-2)
	SEV Verband für Elektro-, Energie- und Informationstechnik	EN 60998	16.0134
	ÖVE Österreichischer Verband für Elektrotechnik	EN 60998	1193-033-07

Ship Approvals

Logo	Approval	Additional Approval Text	Certificate name
	ABS American Bureau of Shipping	-	18- HG1755093- PDA
	BV Bureau Veritas S.A.	EN 60998	11914/CO BV
	DNV GL Det Norske Veritas, Germanischer Lloyd	EN 60998	TAE000015T
	LR Lloyds Register	IEC 60998	04/20013 (E8)

UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
------	----------	--------------------------	------------------

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

This item has been discontinued.



Data sheet | Item number: 273-102

www.wago.com/273-102



UL
UL International Germany GmbH

UL 486C

E69654



UL
UL International Germany GmbH

EN 60998

D-04626

Counterpart

Compatible products

General accessories



Item no.: 249-130
Syringe; Contents: 20 ml Alu-Plus contact paste

www.wago.com/249-130



Item no.: 273-150
Mounting carrier; orange

www.wago.com/273-150

Downloads

CAD/CAE-Data

CAD data

2D/3D Models 273-102

URL

Download

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.