


Data sheet | Item number: 706-150/310-100

Connection cable; 10-pole; Pluggable connector per DIN 41651; 10-pole; Pluggable connector per DIN 41651; Length: 1 m; Conductor cross-section: 0.14 mm²

www.wago.com/706-150_310-100

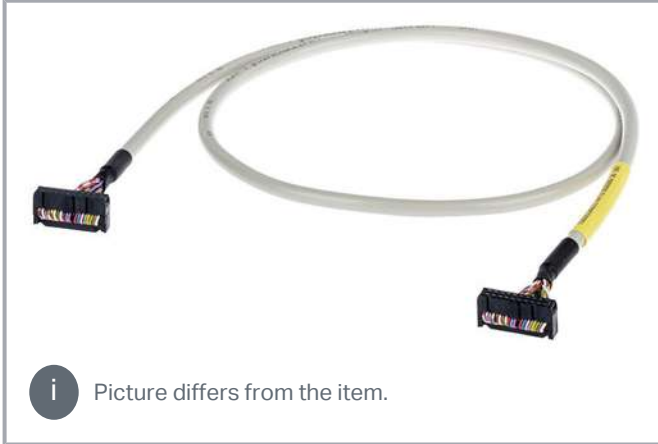

Item description

Note:

When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.

Data

Electrical data

Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	1 A

Connection data

Number of poles	10
Connection type (1)	System
Pole number 1	10
Pluggable connectors	Pluggable connector per DIN 41651; Female connector
Connection type 2	System
Pole number 2	10
Connector 2	Pluggable connector per DIN 41651; Female connector
Cable type	LiYY
Wire cross-section	0.25 mm ²
Color code	per DIN VDE 47100

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Physical data

Cable length	1 m
--------------	-----

Material data

Weight	47 g
--------	------

Environmental requirements

Surrounding air temperature (operation)	-20 ... 50 °C
---	---------------

Commercial data

PU (SPU)	1 Stück
----------	---------

Packaging type	box
----------------	-----

Country of origin	FR
-------------------	----

GTIN	4050821776994
------	---------------

Customs tariff number	85444290900
-----------------------	-------------

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.