



Data

Electrical data

Ratings per IEC/EN 60664-1

Legend (ratings)

(III / 2) ≙ Overvoltage category III / Pollution degree 2

Approvals per UL 1059

Approvals per

UL 1059

Connection data

Number of connection types

1

Width of staggered jumper

10-way

Subject to changes. Please also observe the further product documentation!



Geometrical Data

Pin spacing	7.5 mm / 0.295 inch
-------------	---------------------

Mechanical data

Suitable	for 745 Series – 4 mm ²
----------	------------------------------------

Material Data

Contact material	Copper alloy
------------------	--------------

Contact plating	tin-plated
-----------------	------------

Weight	13.9 g
--------	--------

Commercial data

Product Group	4 (Printed Circuit)
---------------	---------------------

Packaging type	BOX
----------------	-----

Country of origin	CH
-------------------	----

GTIN	4044918303323
------	---------------

Customs Tariff No.	85366990990
--------------------	-------------

Counterpart

Downloads

Documentation

Additional Information

Technical explanations	Apr 3, 2019	pdf 3.6 MB	Download
------------------------	-------------	---------------	----------

Installation Notes


Subject to changes. Please also observe the further product documentation!



Inserting a comb-style jumper bar.



To insert a comb-style jumper bar, push it down using a screwdriver until it hits the backstop – 745 Series.

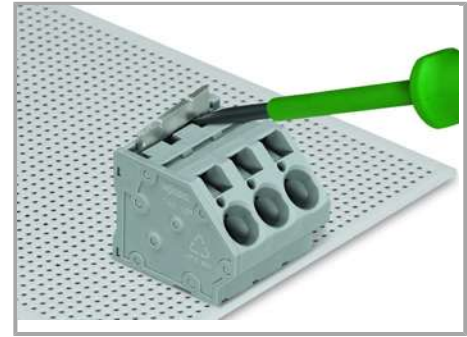

To remove the comb-style jumper bar, lift it up using a screwdriver – 745 Series.

Subject to changes. Please also observe the further product documentation!