
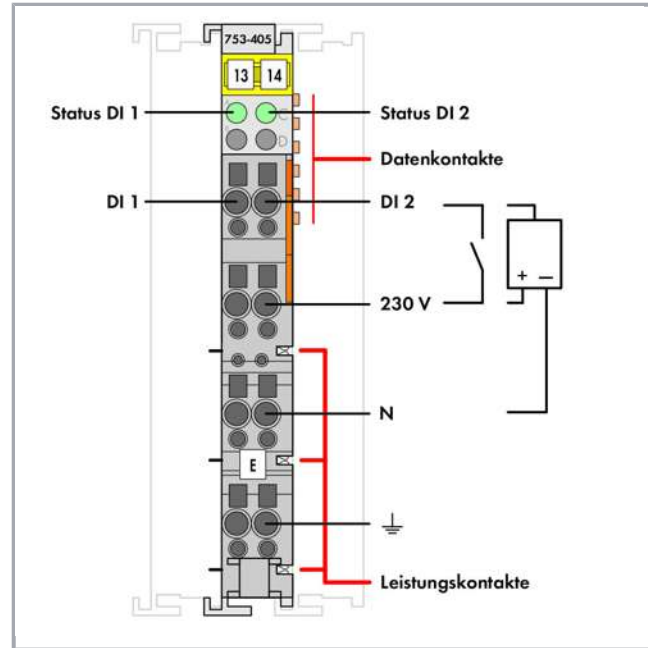


Data sheet | Item number: 753-405  
2-channel digital input; 230 VAC; light gray



[www.wago.com/753-405](http://www.wago.com/753-405)

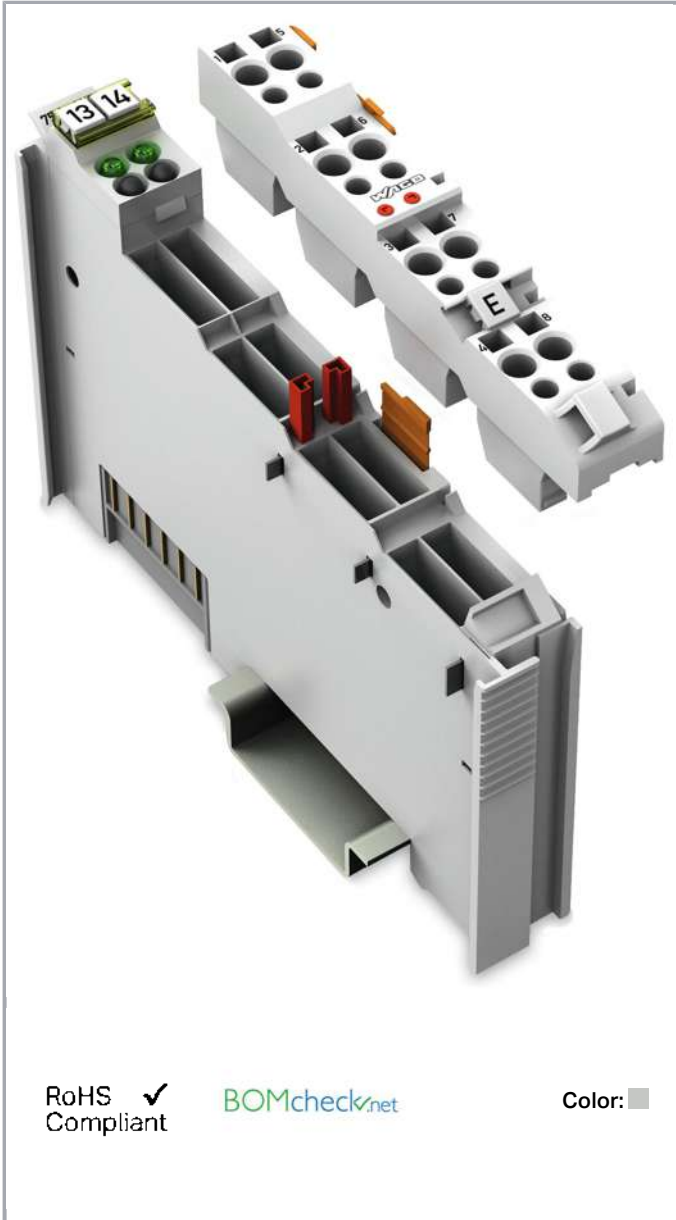

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

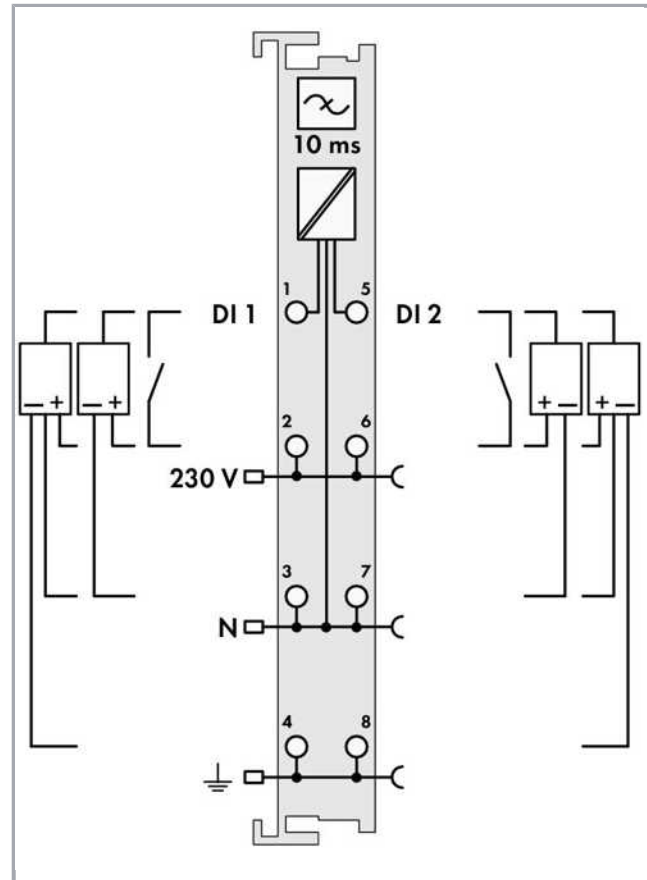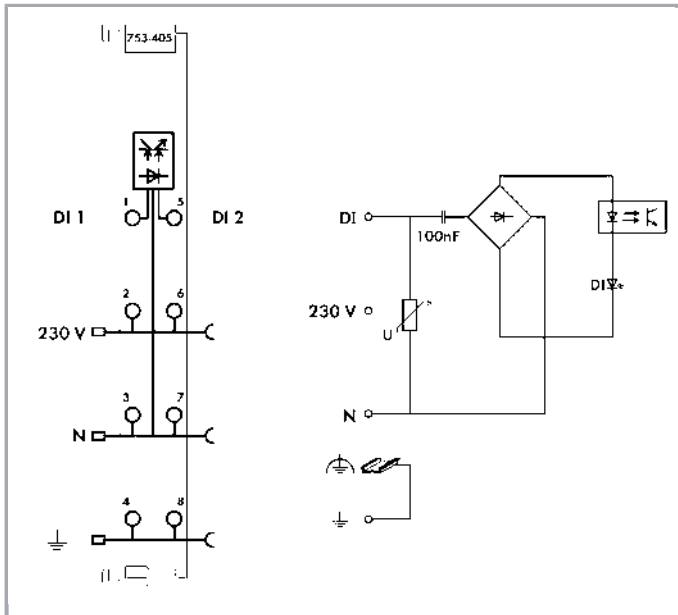

## Item description

This digital input module receives control signals from field devices (e.g., sensors).

Field and system levels are electrically isolated.

### Notice:

An additional supply module must be added for 230 VAC supply!

### Note:

Pluggable connectors and coding fingers (753 Series) are not included.

## Data

### Technical Data

|                          |   |
|--------------------------|---|
| Number of digital inputs | 2 |
|--------------------------|---|

Subject to changes. Please also observe the further product documentation!



|  |   |
|--|---|
| Total number of channels (module)                      | 2   |
| Type of signal   | Voltage   |
| Type of signal voltage                                 | AC 230 V  |
| Sensor supply voltage                                  | AC 230 V  |
| Sensor connection                                      | 2 x (2-wire, 3-wire, 4-wire)  |
| Input characteristic                                   | high-side switching   |
| Input filter (digital)                                 | 10 ms   |
| Input current per channel for signal (1) typ.          | 6.5 mA  |
| Voltage range for signal (0)                           | 0 ... 40 VAC  |
| Voltage range for signal (1)                           | 164 VAC ... $1.1 \times U_N$  |
| Signal frequency min.                                  | 45 Hz   |
| Signal frequency max.                                  | 65 Hz   |
| Max input data width (internal)                        | 2 Bit   |
| System supply voltage                                  | DC 5 V; via data contacts   |
| Current consumption, system supply (5 V)               | 2 mA  |
| Field supply voltage                                   | AC 230 V (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact) |
| Isolation  | 1500 V (system/field)   |
| Indicators   | LED (A, C) green: Status DI 1, DI 2   |
| Number of incoming power jumper contacts               | 3   |
| Number of outgoing power jumper contacts               | 3   |
| Current carrying capacity of the power jumper contacts | 10 A  |

### Connection data

|                                    |  |
|------------------------------------|--|
| Connection technology: In-/Outputs | 8 x CAGE CLAMP®                              |
| Connection type (1)                | Inputs/Outputs                               |
| Solid conductor                    | 0,08 ... 2,5 mm <sup>2</sup> / 28 ... 14 AWG |
| Fine-stranded conductor            | 0,08 ... 2,5 mm <sup>2</sup> / 28 ... 14 AWG |
| Strip length                       | 9 ... 10 mm / 0.35 ... 0.39 inch             |

### Geometrical Data

|                                       |                      |
|---------------------------------------|----------------------|
| Width                                 | 12 mm / 0.472 inch   |
| Height                                | 69,8 mm / 2.748 inch |
| Height from upper-edge of DIN-35 rail | 62,6 mm / 2.465 inch |
| Depth                                 | 100 mm / 3.937 inch  |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.



## Mechanical data

|                     |             |
|---------------------|-------------|
| Type of mounting    | DIN-35 rail |
| Pluggable connector | yes         |

## Material Data

|                    |                              |
|--------------------|------------------------------|
| Color              | light gray                   |
| Housing material   | Polycarbonate, polyamide 6.6 |
| Fire load          | 1.011 MJ                     |
| Weight             | 40 g                         |
| Conformity marking | CE                           |

## Environmental Requirements

|  |                                       |
|--|---------------------------------------|
| Surrounding air (operating) temperature  | 0 ... 55 °C                           |
| Surrounding air (storage) temperature  | -40 ... 85 °C                         |
| Protection class   | IP20                                  |
| Degree of pollution (5)  | 2 per IEC 61131-2                     |
| Operating altitude   | 0 ... 2000 m                          |
| Mounting position  | horizontal (standing/lying); vertical |
| Relative air humidity (no condensation)  | 95 %                                  |
| Vibration resistance   | 4g per IEC 60068-2-6                  |
| Shock resistance   | 15g per IEC 60068-2-27                |
| EMC immunity to interference   | per EN 61000-6-2, marine applications |
| EMC emission of interference   | per EN 61000-6-4, marine applications |
| Exposure to pollutants   | Per IEC 60068-2-42 and IEC 60068-2-43 |
| Permissible H <sub>2</sub> S contaminant concentration at a relative humidity 75 % | 10 ppm                                |
| Permissible SO <sub>2</sub> contaminant concentration at a relative humidity 75 %  | 25 ppm                                |

## Commercial data

|                    |                 |
|--------------------|-----------------|
| Product Group      | 15 (Remote I/O) |
| Packaging type     | BOX             |
| Country of origin  | DE              |
| GTIN               | 4045454394387   |
| Customs Tariff No. | 85389099990     |




Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)


Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.

## Approvals / Certificates




### Ex-Approvals

| Logo   | Approval  | Additional Approval Text | Certificate name                  |
|--|---|--------------------------|-----------------------------------|
|  | <b>ATEX</b><br>TUEV Nord Cert GmbH                                | EN 60079-0               | TÜV 07<br>ATEX<br>554086 X<br>en. |
|  | <b>TUEV Nord</b><br>TUEV Nord Cert GmbH                           | IEC 60079-0              | IECEX<br>TUN<br>09.0001 X         |
|  | <b>UL</b><br>Underwriters Laboratories Inc. (HAZARDOUS LOCATIONS) | UL 121201                | E198726<br>Sec.1                  |

### Country specific Approvals

| Logo  | Approval                                    | Additional Approval Text | Certificate name            |
|---|---|--------------------------|-----------------------------|
|  | <b>KC</b><br>National Radio Research Agency | Article 58-2, Clause 3   | MSIP-<br>REM-W43-<br>DIM750 |

### Ship Approvals

| Logo  | Approval  | Additional Approval Text | Certificate name |
|---|---|--------------------------|------------------|
|   | <b>ABS</b><br>American Bureau of Shipping               | -                        | 19-<br>HG1821926 |
|  | <b>BV</b><br>Bureau Veritas S.A.                        | -                        | 13453/DO BV      |
|   | <b>DNV GL</b><br>Det Norske Veritas, Germanischer Lloyd | -                        | TAA0000194       |
|   | <b>KR</b><br>Korean Register of Shipping                | -                        | KR<br>HMB05880-  |

Subject to changes. Please also observe the further product documentation!



|   |                       |   |               |
|---|-----------------------|---|---------------|
|  | LR<br>Lloyds Register | - | 02/20026 (E6) |
|---|-----------------------|---|---------------|




|                               |   |                       |
|-------------------------------|---|-----------------------|
| PRS<br>Polski Rejestr Statków | - | TE/2236<br>/880590/19 |
|-------------------------------|---|-----------------------|



|                           |   |             |
|---------------------------|---|-------------|
| RINA<br>RINA Germany GmbH | - | ELE066419XG |
|---------------------------|---|-------------|

#### UL-Approvals

| Logo  | Approval   | Additional Approval Text | Certificate name |
|---|--|--------------------------|------------------|
|  | UL<br>UL International Netherlands B.V. (ORDINARY LOCATIONS) | UL 508                   | E175199<br>Sec.1 |

#### Counterpart

#### Compatible products

##### pluggable wiring tier



|                                       |  |
|---------------------------------------|--|
| Item no.: 753-110<br>Plug; light gray | <a href="http://www.wago.com/753-110">www.wago.com/753-110</a> |
|---------------------------------------|--|



|  |  |
|--|--|
| Item no.: 753-150<br>753 Series coding elements; red | <a href="http://www.wago.com/753-150">www.wago.com/753-150</a> |
|--|--|

##### system box

|  |  |
|--|--|
| Item no.: 850-804<br>IP65 enclosure; Stainless steel; WxHxD (400x123x200 mm); 4 x M20, 16 x M16, 28 x M12 cable grip | <a href="http://www.wago.com/850-804">www.wago.com/850-804</a> |
|--|--|

Subject to changes. Please also observe the further product documentation!



**Item no.: 850-804/000-001**

IP65 enclosure; Stainless steel; WxHxD (400x123x200 mm); 2 x M20, 13 x M16, 32 x M12 cable grip

[www.wago.com/850-804/000-001](http://www.wago.com/850-804/000-001)



**Item no.: 850-805**

IP65 enclosure; Stainless steel; WxHxD (600x123x200 mm); 4 x M20, 19 x M16, 67 x M12 cable grip

[www.wago.com/850-805](http://www.wago.com/850-805)



**Item no.: 850-814/002-000**

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (200x120x200 mm); without flange plate

[www.wago.com/850-814/002-000](http://www.wago.com/850-814/002-000)



**Item no.: 850-815/002-000**

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (300x120x200 mm); without flange plate

[www.wago.com/850-815/002-000](http://www.wago.com/850-815/002-000)



**Item no.: 850-816/002-000**

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (400x120x200 mm); without flange plate

[www.wago.com/850-816/002-000](http://www.wago.com/850-816/002-000)



**Item no.: 850-817/002-000**

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (600x120x200 mm); without flange plate

[www.wago.com/850-817/002-000](http://www.wago.com/850-817/002-000)



**Item no.: 850-825**

IP65 enclosure; Aluminium (RAL 7032); WxHxD (160x100x160 mm); 9 x M12, 4 x M20

[www.wago.com/850-825](http://www.wago.com/850-825)



**Item no.: 850-826**

IP65 enclosure; Aluminium (RAL 7032); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip

[www.wago.com/850-826](http://www.wago.com/850-826)



**Item no.: 850-826/002-000**

IP65 enclosure; Aluminium (RAL 7035); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip

[www.wago.com/850-826/002-000](http://www.wago.com/850-826/002-000)



**Item no.: 850-827**

IP65 enclosure; Aluminium (RAL 7032); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip

[www.wago.com/850-827](http://www.wago.com/850-827)



**Item no.: 850-827/002-000**

IP65 enclosure; Aluminium (RAL 7035); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip

[www.wago.com/850-827/002-000](http://www.wago.com/850-827/002-000)



**Item no.: 850-828**

IP65 enclosure; Aluminium (RAL 7032); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip

[www.wago.com/850-828](http://www.wago.com/850-828)



**Item no.: 850-828/002-000**

IP65 enclosure; Aluminium (RAL 7035); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip

[www.wago.com/850-828/002-000](http://www.wago.com/850-828/002-000)



**Item no.: 850-834**

IP65 enclosure; Polyester (RAL 7032); WxHxD (164x100x164 mm); 9 x M12, 4 x M20

[www.wago.com/850-834](http://www.wago.com/850-834)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



**Item no.: 850-835**

IP65 enclosure; Polyester (RAL 7032); WxHxD (244x100x164 mm); 4 x M20, 4 x M16, 14 x M12 cable grip

[www.wago.com/850-835](http://www.wago.com/850-835)



**Item no.: 850-836**

IP65 enclosure; Polyester (RAL 7032); WxHxD (324x100x164 mm); 4 x M20, 8 x M16, 17 x M12 cable grip

[www.wago.com/850-836](http://www.wago.com/850-836)

**Marking accessories**



**Item no.: 2009-145**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

[www.wago.com/2009-145](http://www.wago.com/2009-145)



**Item no.: 2009-145/000-002**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

[www.wago.com/2009-145/000-002](http://www.wago.com/2009-145/000-002)



**Item no.: 2009-145/000-005**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red

[www.wago.com/2009-145/000-005](http://www.wago.com/2009-145/000-005)



**Item no.: 2009-145/000-006**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue

[www.wago.com/2009-145/000-006](http://www.wago.com/2009-145/000-006)



**Item no.: 2009-145/000-007**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

[www.wago.com/2009-145/000-007](http://www.wago.com/2009-145/000-007)



**Item no.: 2009-145/000-012**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange

[www.wago.com/2009-145/000-012](http://www.wago.com/2009-145/000-012)



**Item no.: 2009-145/000-023**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green

[www.wago.com/2009-145/000-023](http://www.wago.com/2009-145/000-023)



**Item no.: 2009-145/000-024**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet

[www.wago.com/2009-145/000-024](http://www.wago.com/2009-145/000-024)



**Item no.: 248-501**

Miniature WSB Quick marking system; plain; Marker width 5 mm; 10 strips with 10 markers per card

[www.wago.com/248-501](http://www.wago.com/248-501)



**Item no.: 248-501/000-002**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow

[www.wago.com/248-501/000-002](http://www.wago.com/248-501/000-002)



**Item no.: 248-501/000-005**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red

[www.wago.com/248-501/000-005](http://www.wago.com/248-501/000-005)



















**Item no.: 248-501/000-006**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue

















[www.wago.com/248-501/000-006](http://www.wago.com/248-501/000-006)

Subject to changes. Please also observe the further product documentation!



|  |  |  |
|--|--|--|
|    | <b>Item no.: 248-501/000-007</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray                         | <a href="http://www.wago.com/248-501/000-007">www.wago.com/248-501/000-007</a> |
|    | <b>Item no.: 248-501/000-012</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange                       | <a href="http://www.wago.com/248-501/000-012">www.wago.com/248-501/000-012</a> |
|    | <b>Item no.: 248-501/000-017</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green                  | <a href="http://www.wago.com/248-501/000-017">www.wago.com/248-501/000-017</a> |
|    | <b>Item no.: 248-501/000-023</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green                        | <a href="http://www.wago.com/248-501/000-023">www.wago.com/248-501/000-023</a> |
|    | <b>Item no.: 248-501/000-024</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet                       | <a href="http://www.wago.com/248-501/000-024">www.wago.com/248-501/000-024</a> |
|    | <b>Item no.: 709-198</b><br>Marking strips; white  | <a href="http://www.wago.com/709-198">www.wago.com/709-198</a>                 |
|    | <b>Item no.: 750-100</b><br>Marker card; as a DIN A4 sheet; plain; white   | <a href="http://www.wago.com/750-100">www.wago.com/750-100</a>                 |
|   | <b>Item no.: 750-103</b><br>Group marker carrier; transparent  | <a href="http://www.wago.com/750-103">www.wago.com/750-103</a>                 |
|  | <b>Item no.: 750-106</b><br>Group marker carrier; transparent  | <a href="http://www.wago.com/750-106">www.wago.com/750-106</a>                 |
| <b>Carrier rail</b>  |  |  |
|  | <b>Item no.: 210-112</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm   | <a href="http://www.wago.com/210-112">www.wago.com/210-112</a>                 |
|  | <b>Item no.: 210-113</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715                    | <a href="http://www.wago.com/210-113">www.wago.com/210-113</a>                 |
|  | <b>Item no.: 210-114</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715                     | <a href="http://www.wago.com/210-114">www.wago.com/210-114</a>                 |
|  | <b>Item no.: 210-115</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm   | <a href="http://www.wago.com/210-115">www.wago.com/210-115</a>                 |
|  | <b>Item no.: 210-118</b><br>Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715                   | <a href="http://www.wago.com/210-118">www.wago.com/210-118</a>                 |
|  | <b>Item no.: 210-196</b><br>Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored | <a href="http://www.wago.com/210-196">www.wago.com/210-196</a>                 |
|  | <b>Item no.: 210-197</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715                       | <a href="http://www.wago.com/210-197">www.wago.com/210-197</a>                 |

Subject to changes. Please also observe the further product documentation!

|  |   |  |
|--|---|--|
|    | <b>Item no.: 210-198</b><br>Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored | <a href="http://www.wago.com/210-198">www.wago.com/210-198</a> |
|    | <b>Item no.: 210-504</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715         | <a href="http://www.wago.com/210-504">www.wago.com/210-504</a> |
|    | <b>Item no.: 210-505</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715       | <a href="http://www.wago.com/210-505">www.wago.com/210-505</a> |
|    | <b>Item no.: 210-506</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715        | <a href="http://www.wago.com/210-506">www.wago.com/210-506</a> |
|    | <b>Item no.: 210-508</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715          | <a href="http://www.wago.com/210-508">www.wago.com/210-508</a> |
| <b>Supply module</b>   |   |  |
|    | <b>Item no.: 750-609</b><br>Power Supply; 230 VAC; fuse holder; light gray  | <a href="http://www.wago.com/750-609">www.wago.com/750-609</a> |
|    | <b>Item no.: 750-611</b><br>Power Supply; 230 VAC; fuse holder; Diagnostics; light gray   | <a href="http://www.wago.com/750-611">www.wago.com/750-611</a> |
|    | <b>Item no.: 750-612</b><br>Power Supply; 0 ... 230 V AC/DC; light gray   | <a href="http://www.wago.com/750-612">www.wago.com/750-612</a> |
|   | <b>Item no.: 753-612</b><br>Power Supply; 0 ... 230 V AC/DC; -  | <a href="http://www.wago.com/753-612">www.wago.com/753-612</a> |
| <b>shield connection</b>   |   |  |
|  | <b>Item no.: 790-108</b><br>Shield clamping saddle; 11 mm wide; diameter of compatible conductor; 3 ... 8 mm                          | <a href="http://www.wago.com/790-108">www.wago.com/790-108</a> |
|  | <b>Item no.: 790-116</b><br>Shield clamping saddle; 19 mm wide; diameter of compatible conductor; 7 ... 16 mm                         | <a href="http://www.wago.com/790-116">www.wago.com/790-116</a> |
|  | <b>Item no.: 790-124</b><br>Shield clamping saddle; 27 mm wide; diameter of compatible conductor; 6 ... 24 mm                         | <a href="http://www.wago.com/790-124">www.wago.com/790-124</a> |
|  | <b>Item no.: 790-140</b><br>Shield clamping saddle; diameter of compatible conductor  | <a href="http://www.wago.com/790-140">www.wago.com/790-140</a> |
|  | <b>Item no.: 790-208</b><br>Shield clamping saddle; 12.4 mm wide; 3 ... 8 mm  | <a href="http://www.wago.com/790-208">www.wago.com/790-208</a> |
|  | <b>Item no.: 790-216</b><br>Shield clamping saddle; 21.8 mm wide; 6 ... 16 mm   | <a href="http://www.wago.com/790-216">www.wago.com/790-216</a> |
|  | <b>Item no.: 790-220</b><br>Shield clamping saddle; 30 mm wide; 6 ... 20 mm   | <a href="http://www.wago.com/790-220">www.wago.com/790-220</a> |

Subject to changes. Please also observe the further product documentation!



## Downloads

### Documentation

#### Manual

|   |         |               |          |
|---|---------|---------------|----------|
| 2-channel, 230VAC<br>2- to 4-wire connection; high-side switching | V 1.2.0 | pdf<br>2.2 MB | Download |
|---|---------|---------------|----------|

#### Bid Text

|                        |              |               |          |
|------------------------|--------------|---------------|----------|
| 753-405<br>X81 - Datei | Feb 19, 2019 | xml<br>4.8 kB | Download |
|------------------------|--------------|---------------|----------|

|                        |              |                |          |
|------------------------|--------------|----------------|----------|
| 753-405<br>doc - Datei | Jul 13, 2017 | doc<br>29.7 kB | Download |
|------------------------|--------------|----------------|----------|

#### Additional Information

|  |         |                 |          |
|--|---------|-----------------|----------|
| Disposal; Electrical and electronic equipment, Packaging | V 1.0.0 | pdf<br>265.8 kB | Download |
|--|---------|-----------------|----------|

#### System Description

|   |  |               |          |
|---|--|---------------|----------|
| 750/753 Series I/O-System – General Product Information |  | pdf<br>1.7 MB | Download |
|---|--|---------------|----------|

|   |  |                 |          |
|---|--|-----------------|----------|
| Overview on WAGO-I/O-SYSTEM 750 approvals |  | pdf<br>780.2 kB | Download |
|---|--|-----------------|----------|

## CAD/CAE-Data

### CAD data

|                      |  |     |          |
|----------------------|--|-----|----------|
| 2D/3D Models 753-405 |  | URL | Download |
|----------------------|--|-----|----------|

### CAE data

|                           |  |     |          |
|---------------------------|--|-----|----------|
| EPLAN Data Portal 753-405 |  | URL | Download |
|---------------------------|--|-----|----------|

|                        |  |     |          |
|------------------------|--|-----|----------|
| WSCAD Universe 753-405 |  | URL | Download |
|------------------------|--|-----|----------|

## Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Product family

**750/753 Series – I/O System**

Show all products from the family

Subject to changes. Please also observe the further product documentation!

---

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.