


Data sheet | Item number: 787-1015/072-000

DC/DC Converter; EPSITRON® COMPACT Power; 72 VDC input voltage; 12 VDC output voltage; 4 A output current; galvanically isolated




www.wago.com/787-1015_072-000

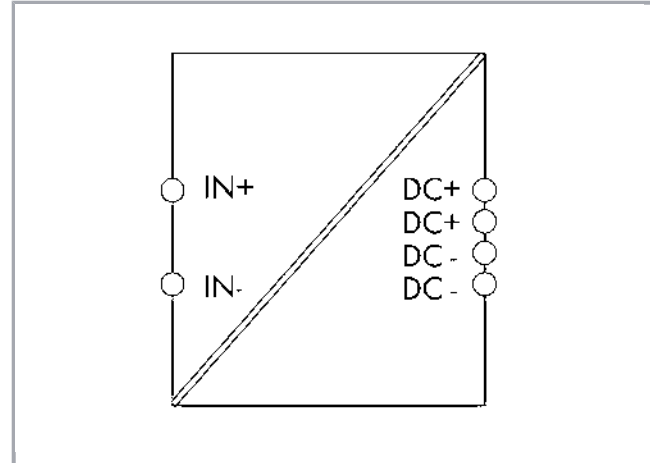

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

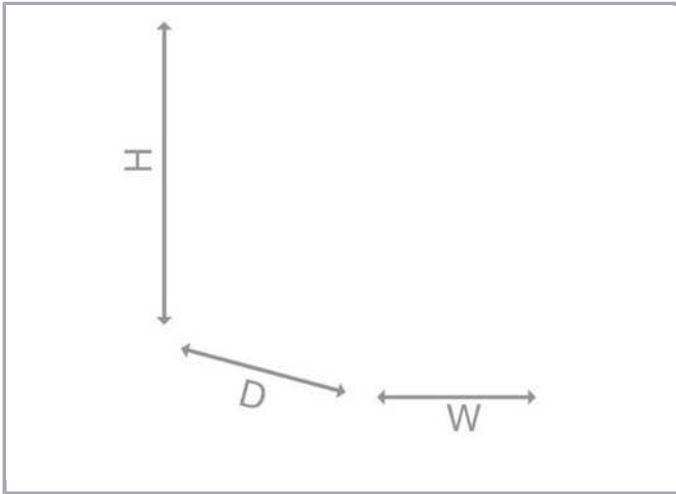

Item description

Features:

- Switched-mode power supply
- Natural convection cooling when horizontally mounted
- Stepped profile, ideal for distribution boards/boxes
- Suitable for both parallel and series operation
- Electrically isolated output voltage (SELV) per EN 60950-1
- Control deviation: $\pm 1\%$ ($\pm 10\%$ within the application range of EN 50121-3-2)
- Suitable for railway applications

Data

Technical Data

Input

Nominal input voltage $U_{i\text{nom}}$	DC 72 V
Input voltage range	DC 40 ... 90 V
Nominal mains frequency range	0 Hz
Input current I_i	$\leq 0,79$ A (72 VDC)
Discharge current	≤ 1 mA
Inrush current	≤ 30 A (NTC)
Mains failure hold-up time	≥ 8 ms (72 VDC)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



Output

Nominal output voltage $U_{o\ nom}$	DC 12 V (SELV)
Factory preset	DC 12 V
Nominal output current $I_{o\ nom}$	4 A (24 VDC); 3,1 A (in any mounting position)
Nominal output power	48 W
Adjustment accuracy	$\leq 1\ %$
Residual ripple	$\leq 100\ mV$ (peak-to-peak)
Current limitation	$1.1 \times I_{o\ nom}$ (typ.)
Overload behavior	Constant current

Signaling and communication

Signaling	1 x Status indication LED (green)
Operation status indicator	Green LED (U_o)

Efficiency/Power losses:

Power loss P_l	$\leq 1,2\ W$ (72 VDC; No load); $\leq 8,6\ W$ (72 VDC; Nominal load)
Max. power loss $P_{v\ max.}$	9,7 W (40 VDC / 12 VDC; 4 A)
Efficiency (typ.)	85 %

Fuse protection:

Internal fuse	T 4 A / 125 VDC
External fuse (recommended)	Circuit breaker: 6 A, 10 A; Tripping characteristic: B or C

Safety and protection:

Insulation voltage (PRI-SEC)	DC 4,242 kV
Protection class	II
Protection class	IP20 (per EN 60529)
Feedback voltage	$\leq DC\ 20\ V$
Overvoltage category	II
Transient protection, primary	Varistor
Overvoltage protection, secondary	Internal protective circuit $\leq 21.5\ VDC$ (in the event of a fault)
Short circuit protection	Yes

Subject to changes. Please also observe the further product documentation!



No-load proof	Yes
Parallel operation	Yes
Series connection	Yes
MTBF	> 500,000 h (per IEC 61709)

Connection data

Connection type (1)	Input/Output
Connection technology	CAGE CLAMP®
WAGO terminal	WAGO 740 Series
Solid conductor	0,08 ... 2,5 mm ² / 28 ... 12 AWG
Fine-stranded conductor	0,08 ... 2,5 mm ² / 28 ... 12 AWG
Strip length	6 ... 7 mm / 0.24 ... 0.28 inch

Geometrical Data

Width	72 mm / 2.835 inch
Height	89 mm / 3.504 inch
Depth	59 mm / 2.323 inch
Length from upper-edge of DIN-35 rail	55 mm / 2.165 inch

Mechanical data

Type of mounting	DIN-35 rail (EN 60715)
------------------	------------------------

Material Data

Flammability class per UL94	V0
Weight	235 g

Environmental Requirements

Surrounding air (operating) temperature	-40 ... 70 °C
Surrounding air (storage) temperature	-40 ... 85 °C
Relative humidity	5 ... 96 % (coated PCB)
Derating	-1.5 %/K (> 55 °C)
Pollution degree	2
Climatic category	3K3 (per EN 60721)
Shock and vibration resistance	Category 1, Class B (per EN 61373:2010)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



Standards and specifications

Conformity marking	CE
Standards/specifications	EN 60950; EN 61204-3; EN 50121-3-2; EN 50125; DNV GL

Commercial data

Packaging type	BOX
Country of origin	DE
GTIN	4055143621502
Customs Tariff No.	85044082900

Counterpart

Downloads

Documentation

Bid Text

787-1015/072-000 GAEB docx - Datei	Jun 24, 2019	docx 20.0 kB	Download
787-1015/072-000 GAEB X81 - Datei	Jul 1, 2019	xml 6.4 kB	Download

Instruction Leaflet

Primär getaktete Stromversorgungen EPSITRON COMPACT Power DC 72 V / DC 24 V, 2 A		pdf 1.4 MB	Download
---	--	---------------	----------

Additional Information

Disposal; Electrical and electronic equipment, Packaging	V 1.0.0	pdf 265.8 kB	Download
--	---------	-----------------	----------

CAD/CAE-Data

CAD data

2D/3D Models 787-1015/072-000		URL	Download
-------------------------------	--	-----	----------

CAE data

Subject to changes. Please also observe the further product documentation!



Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.