

## Data sheet | Item number: 2009-402

Push-in type wire jumper; insulated; wire length 60 mm; Conductor cross section 0.75 mm<sup>2</sup>; suitable for 2000 and 2020 Series rail-mounted terminal blocks; gray

[www.wago.com/2009-402](http://www.wago.com/2009-402)



### Item description

#### Safety information 1:

Note: Push down the wire jumper until fully inserted.

### Data

#### Electrical data

#### Ratings per IEC/EN 60664-1

|                                 |       |
|---------------------------------|-------|
| Rated voltage (III / 3)         | 800 V |
| Rated impulse voltage (III / 3) | 8 kV  |
| Rated current                   | 9 A   |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

**Mechanical data**

|                             |       |
|-----------------------------|-------|
| Wire length of wire jumpers | 60 mm |
|-----------------------------|-------|

**Material Data**

|           |          |
|-----------|----------|
| Color     | gray     |
| Fire load | 0.015 MJ |
| Weight    | 1.4 g    |

**Commercial data**

|                    |                                |
|--------------------|--------------------------------|
| Product Group      | 2 (Terminal Block Accessories) |
| Packaging type     | BOX                            |
| Country of origin  | DE                             |
| GTIN               | 4050821458883                  |
| Customs Tariff No. | 85444290900                    |

**Counterpart****Downloads****Documentation****Bid Text**

|                              |              |               |          |
|------------------------------|--------------|---------------|----------|
| 2009-402<br>GAEB X81 - Datei | Feb 19, 2019 | xml<br>2.8 kB | Download |
|------------------------------|--------------|---------------|----------|

|                         |              |                |          |
|-------------------------|--------------|----------------|----------|
| 2009-402<br>doc - Datei | Apr 28, 2017 | doc<br>24.1 kB | Download |
|-------------------------|--------------|----------------|----------|

**Additional Information**

|                        |             |               |          |
|------------------------|-------------|---------------|----------|
| Technical explanations | Apr 3, 2019 | pdf<br>2.1 MB | Download |
|------------------------|-------------|---------------|----------|


**CAD/CAE-Data****CAE data**

|                         |     |          |
|-------------------------|-----|----------|
| WSCAD Universe 2009-402 | URL | Download |
|-------------------------|-----|----------|

Subject to changes. Please also observe the further product documentation!

## Installation Notes

### Jumpered

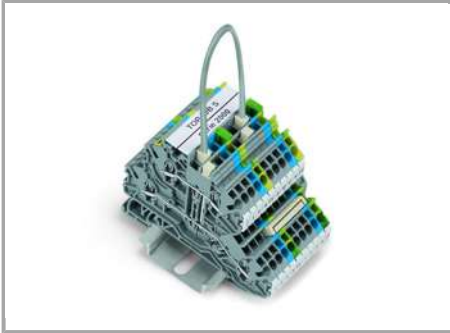

Push down the wire jumper (2009-402) until fully inserted. Lift the jumper with an operating tool for rewiring.

### Commoning



Push-in type wire jumpers common terminal blocks over longer distances and across multiple levels.

## Product family

### TOPJOB® S

TOPJOB® S: In various industrial applications and modern building installations, WAGO's wide and versatile range of rail-mount terminal blocks provides more than just reliable electrical connections.

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!