
Data sheet | Item number: 2081-1224/200-604/997-404 THR PCB terminal block; push-button; 1.5 mm²; Pin spacing 3.5 mm; 4-pole; Push-in CAGE CLAMP[®]; in tape-and-reel packaging; 1,50 mm²; black



www.wago.com/2081-1224_200-604_997-404

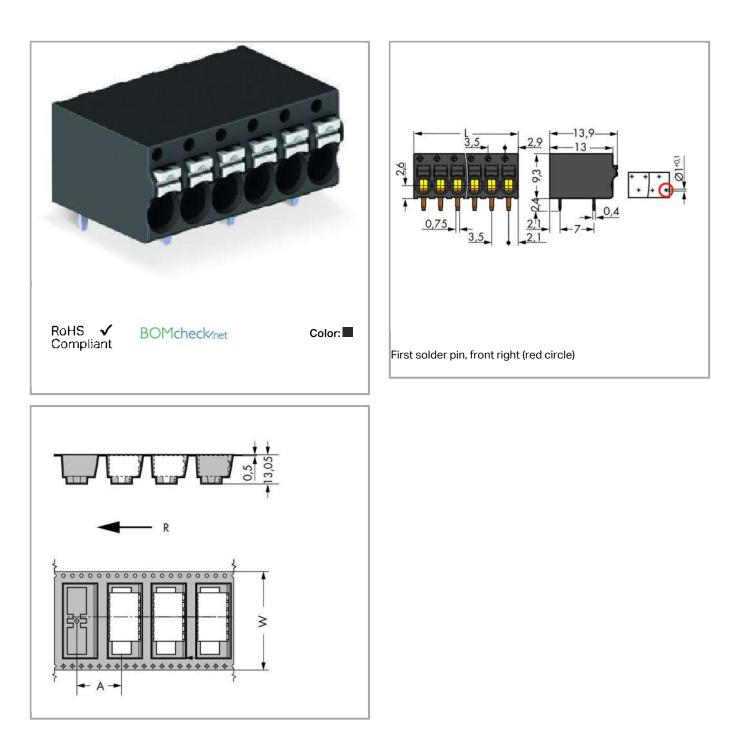

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG Hansastr. 27 32423 Minden Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.



Item description

- Integration of high-temperature resistant THR terminal strips into SMT Reflow soldering processes
- Tape-and-reel packaging for automated assembly available on request
- Push-in connection of solid and fine-stranded conductors with ferrules
- Convenient termination/removal of fine-stranded conductors via push-buttons
- Versions with alternating soldering pins available for higher voltage levels
- Straight and angled versions for convenient wiring in both vertical and horizontal directions
- Pin center spacing can be maintained in a terminal strip assembly

Data

Approvals / Certificates

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name

UL-Approvals

.

			Certificate
Logo	Approval	Additional Approval Text	name
	UL	UL 1059	20190731-
GI ®	UL International Germany GmbH		E45172

Counterpart

Downloads Documentation Additional Information Technical explanations Apr 3, 2019 pdf Download 3.6 MB

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KGDo you have any questions about our products?Hansastr. 27We are always happy to take your call at +49 (571) 887-44222.32423 MindenPhone: +49571 887-0 | Fax: +49571 887-169Email: info.de@wago.com | Web: www.wago.comEmail: info.de@wago.com | Web: www.wago.com