


## Data sheet | Item number: 2104-1391

End and intermediate plate; 1 mm thick; for 3-conductor terminal blocks;  
gray

[www.wago.com/2104-1391](http://www.wago.com/2104-1391)

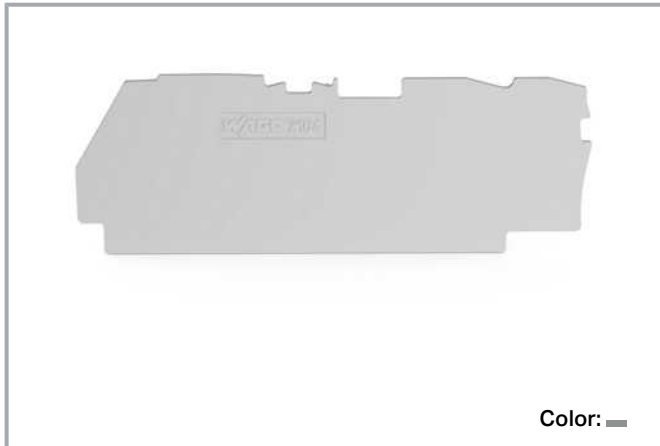

### Data

#### Physical data

Width	1 mm / 0.039 inch
Height	82.7 mm / 3.256 inch
Depth	30.5 mm / 1.201 inch

#### Material data

Color	gray
Flammability class per UL94	V0
Fire load	0.079 MJ
Weight	2.7 g

#### Commercial data

PU (SPU)	100 (25) Stück
Country of origin	DE
GTIN	4055143975391
Customs tariff number	8538906000

### Downloads

#### Documentation

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



#### Additional Information

Technical explanations

2019 Apr 3

pdf  
2.2 MB

[Download](#)

#### CAD files

##### CAE data

ZUKEN Portal 2104-1391

[URL](#)

[Download](#)

##### CAD data

2D/3D Models 2104-1391

[URL](#)

[Download](#)

#### Environmental Product Compliance

##### Compliance Search

Environmental Product Compliance 2104-1391

[URL](#)

[Download](#)

End and intermediate plate; 1 mm thick; for 3-conductor terminal blocks; gray

#### Installation Notes

#### Product family

##### TOPJOB® S

TOPJOB® S: In various industrial applications and modern building installations, WAGO's wide and versatile range of rail-mount terminal blocks provides more than just reliable electrical connections.

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.