
Data sheet | Item number: 2273-500


rail mounting/screw mounting; orange

Mounting carrier; for single- and double-row con.; 2273 Series; for DIN-35



www.wago.com/2273-500

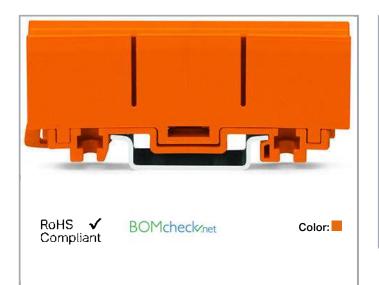



Item description

Note:

One single carrier can hold up to 24 clamping units in a very narrow space. Previously, this was only possible using rail-mount terminal blocks. Advantages:

- Mount carrier onto DIN-35 rail or via screws easily and quickly
- Accommodate three 2.5 mm² (12 AWG) 2273 Series Connectors in a single carrier
- Easily exchange connectors
- Large marking area for self-adhesive marking strips or for direct marking with permanent felt-tip pen

Data

Geometrical Data

| Width | 18,5 mm / 0.728 inch |
|---------------------------------------|----------------------|
| Height from upper-edge of DIN-35 rail | 21,5 mm / 0.846 inch |
| Depth | 72,5 mm / 2.854 inch |

Material Data

| Color | orange |
|-----------|----------|
| Fire load | 0.322 MJ |

Subject to changes. Please also observe the further product documentation!

| WAGO Kontakttechnik GmbH & Co. KG | Do you have any questions about our products? |
|---|---|
| Hansastr. 27 | We are always happy to take your call at +49 (571) 887-44222. |
| 32423 Minden | |
| Phone: +49571 887-0 Fax: +49571 887-169 | |
| Email: info.de@wago.com Web: www.wago.com | |

www.wago.com/2273-500



| Weight | 10.7 g |
|--------|--------|
| | |

Commercial data

| Product Group | 7 (Push Wire Conn.) |
|--------------------|---------------------|
| Packaging type | BOX |
| Country of origin | DE |
| GTIN | 4050821101871 |
| Customs Tariff No. | 39269097900 |

Approvals / Certificates

Ship Approvals

| Logo | Approval | Additional Approval Text | Certificate name |
|------|--|--------------------------|---------------------|
| | DNV GL Det Norske Veritas, Germanischer Lloyd | EN 60998 | TAE000015T |

Counterpart

| Downloads Documentation | | | | |
|--|-------------------------------------|---|----------|--|
| Bid Text | | | | |
| | | | | |
| 2273-500 | 17-mei-2017 | doc | Download | |
| doc - Datei | | 24.1 kB | | |
| 2273-500 | 19-feb-2019 | xml | Download | |
| GAEB X81 - Datei | | 2.6 kB | | |
| Additional Information | | | | |
| Technical explanations | 3-apr-2019 | pdf 2.1 MB | Download | |
| | | | | |
| CAD/CAE-Data | | | | |
| CAD data | | | | |
| 2D/3D Models 2273-500 | | URL | Download | |
| Subject to changes. Please also observe the further product | documentation! | | | |
| WAGO Kontakttechnik GmbH & Co. KG | Do you have any questions about ou | Do you have any questions about our products? | | |
| Hansastr. 27 | We are always happy to take your ca | ll at +49 (571) 887- | 44222. | |
| 32423 Minden | | | | |
| Phone: +49571 887-0 Fax: +49571 887-169 Email: info.de@wago.com Web: www.wago.com | | | | |
| | | | | |



| EPLAN Data Portal 2273-500 | URL | Download |
|----------------------------|-----|----------|
| WSCAD Universe 2273-500 | URL | Download |

Installation Notes

CAE data



The mounting carrier is suitable for both connector heights.



To adjust the mounting carrier, unlock the latch via operating tool (5.5 mm blade) and move the clamping slide to the required width by rotating the tool.



The mounting carrier is suitable for both connector heights.



The mounting carrier is suitable for both connector heights.

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG Hansastr. 27 32423 Minden Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.