

Data
Technical Data

Control circuit

Input voltage range	±10 %
---------------------	-------

Connection data

Connection technology	CAGE CLAMP®
Solid conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Strip length	5 ... 6 mm / 0.2 ... 0.24 inch
--------------	--------------------------------

Material Data

Fire load	1.18 MJ
Weight	90.6 g

Environmental Requirements

Surrounding air (storage) temperature	-40 ... 80 °C
Processing temperature	-25 ... +50 °C

Commercial data

Product Group	6 (Interface Electronics)
Packaging type	BOX
Country of origin	DE
GTIN	4055143879156
Customs Tariff No.	85364900990

Counterpart

Downloads

Documentation

Instruction Leaflet

pdf
1.3 MB

Download

CAD/CAE-Data

CAE data

EPLAN Data Portal 288-432	URL	Download
WSCAD Universe 288-432	URL	Download


Installation Notes

Inserting a conductor


Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

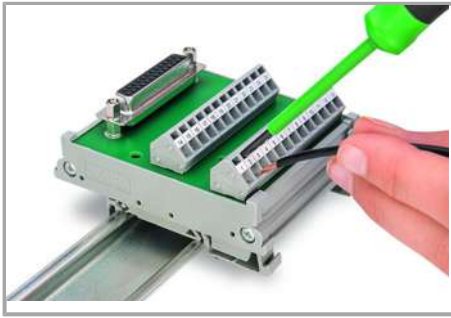


Connection of conductor – Operating tool actuation parallel to conductor entry.

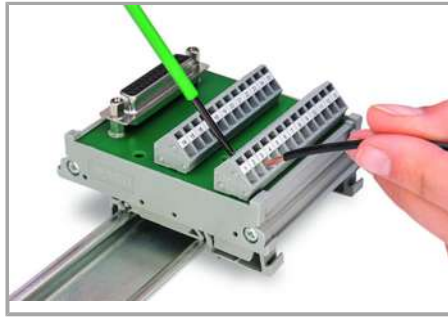


Connection of conductor – Operating tool actuation perpendicular to conductor entry.

Assembly

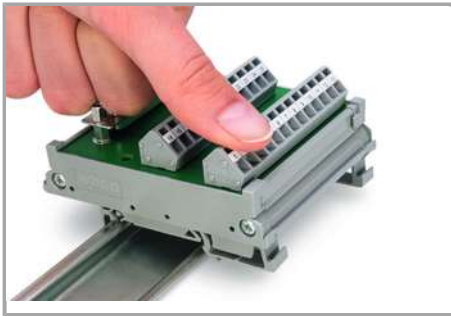

Assembly of a module on the carrier rail

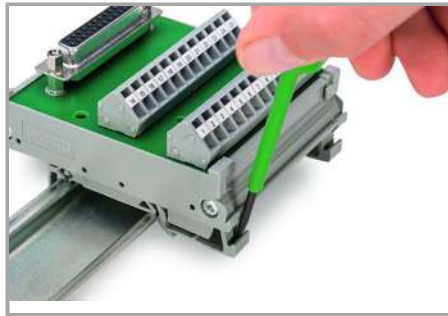

Removing a module from the DIN-rail.

Subject to changes. Please also observe the further product documentation!