


Data sheet | Item number: 293-695/001-000

Insulated PUSH WIRE® connectors; with 2 snap-in mounting feet; 5-pole; with standard marking; Push-buttons on both sides; Long housing; 1,50 mm²; white

www.wago.com/293-695_001-000

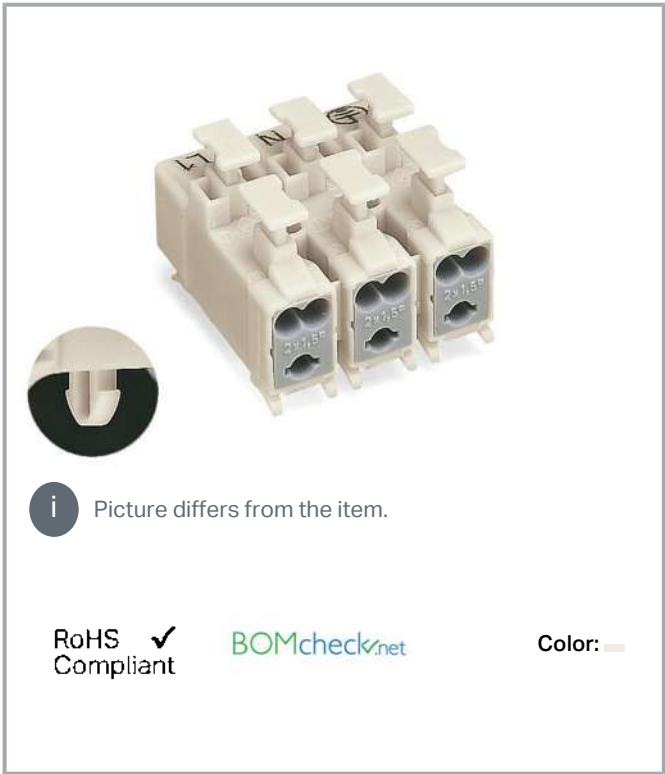

Data

Connection data

Connection technology	PUSH WIRE®
Strip length	8 ... 9 mm / 0.31 ... 0.35 inch
Pole No.	5
Total number of connection points	20
Total number of potentials	5
Number of connection types	1

Material data

Color	white
Fire load	0.28 MJ

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at {0}.



Weight	16.8 g
--------	--------

Physical data

Width	48.5 mm / 1.909 inch
Height	20.8 mm / 0.819 inch
Depth	29 mm / 1.142 inch

Commercial data

Product Group	8 (Misc. Chassis Mount Blocks)
Packaging type	bag
GTIN	4044918405577

Electrical data

IEC Approvals

Ratings per	IEC/EN 60664-1
Rated voltage (III/2)	400 V
Rated surge voltage (III/2)	4 kV
Rated current	18 A
Legend (ratings)	(III / 2) \triangleq Overvoltage category III / Pollution degree 2

UL Approvals

Approvals per	UL 1059
---------------	---------

CSA Approvals

Approvals per	CSA
---------------	-----

Downloads

Documentation

Additional Information

Technical explanations	2019 Apr 3	pdf 2.0 MB	Download
------------------------	------------	---------------	----------

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at {0}.