
Data sheet | Item number: 706-100/637-300

Connection cable; 37-pole; with solder pin; Female connector; open-ended;

Length: 2 m; Conductor cross-section: 0.25 mm²

www.wago.com/706-100_637-300



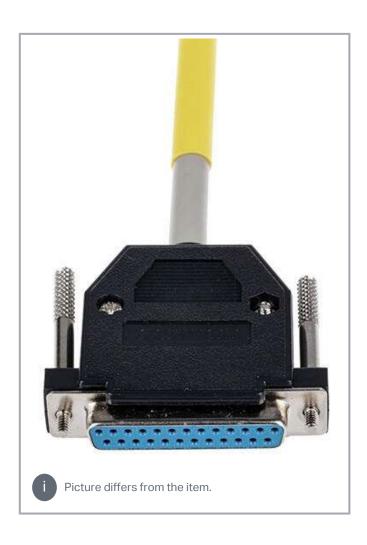

Item description

Note:

When using more than 10 wires, the maximum current per wire must be reduced to 1 \mbox{A} .

Data

Electrical data

Operating voltage ≤ AC/DC 35 V

Current per wire (max.) 2 A

Subject to changes. Please also observe the further product documentation!

WAGO Corporation Germantown, WI 53022

Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222

Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

Data sheet | Item number: 706-100/637-300

www.wago.com/706-100_637-300



Connection data

Number of poles	37
Connection type (1)	System
Pole number 1	37
Pluggable connectors	D-sub female connector
Connection type 2	Open-ended
Cable type	LiYCY
Wire cross-section	0.25 mm ²
Color code	per DIN VDE 47100

Physical data

Cable length 3 m	
------------------	--

Material data

Weight	999 g
Weight	555 g

Environmental requirements

|--|

Commercial data

PU (SPU)	1 Stück
Country of origin	FR
GTIN	4050821835707
Customs tariff number	85444290900

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-100/637-300	URL	Download
Connection cable; 37-pole; with solder pin; Female connector; open-ended; Length: 2		
m; Conductor cross-section: 0.25 mm ²		

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Corporation Do you have any questions about our products?

Germantown, WI 53022 We are always happy to take your call at +49 (571) 887-44222.

Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222