


## Data sheet | Item number: 706-150/326-300

Connection cable; 26-pole; Pluggable connector per DIN 41651; 26-pole;  
Pluggable connector per DIN 41651; Length: 3 m; Conductor cross-section:  
0.14 mm<sup>2</sup>

[www.wago.com/706-150\\_326-300](http://www.wago.com/706-150_326-300)

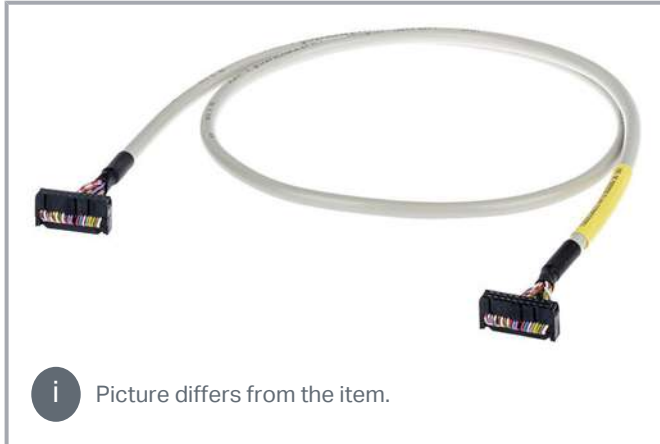

### Item description

#### Note:

When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.

### Data

#### Electrical data

Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	1 A

#### Connection data

Number of poles	26
Connection type (1)	System
Pole number 1	26
Pluggable connectors	Pluggable connector per DIN 41651; Female connector
Connection type 2	System
Pole number 2	26
Connector 2	Pluggable connector per DIN 41651; Female connector
Cable type	LiYY
Wire cross-section	0.25 mm <sup>2</sup>
Color code	per DIN VDE 47100

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.





## Physical data

Cable length	3 m
--------------	-----

## Material data

Weight	338 g
--------	-------

## Environmental requirements

Surrounding air temperature (operation)	-20 ... 50 °C
---	---------------

## Commercial data

PU (SPU)	1 Stück
Packaging type	box
GTIN	4050821835776

## Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.