

**Data sheet | Item number: 756-3501/050-150**


Power cable; M12L socket; straight; 5-pole; Length: 15 m

[www.wago.com/756-3501\\_050-150](http://www.wago.com/756-3501_050-150)



RoHS   
Compliant


[BOMcheck.net](https://www.bomcheck.net)

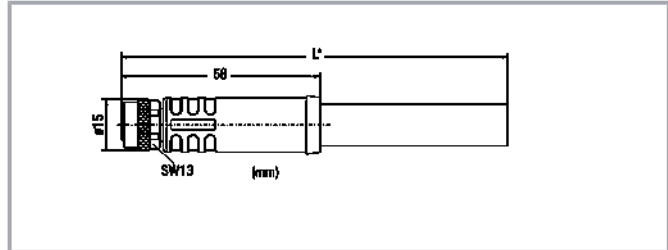

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at {0}.

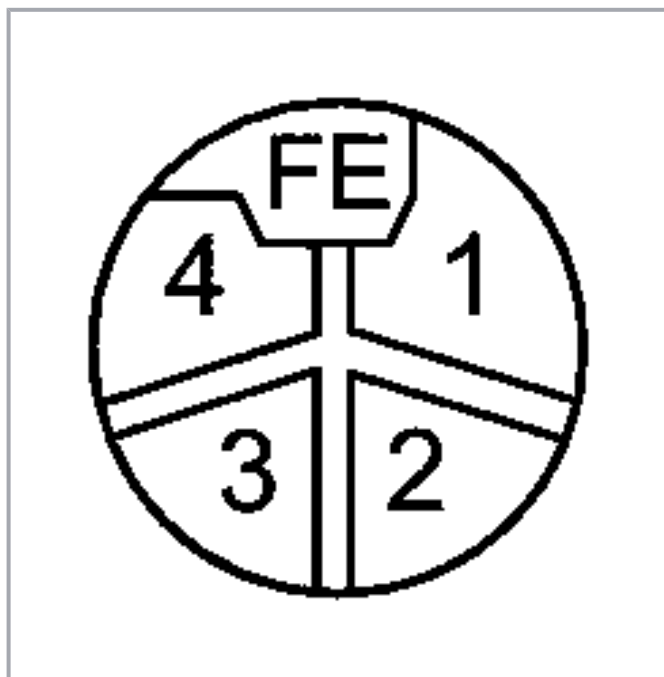

Pin 1 ... 4; FG: 1.5 mm <sup>2</sup>				
1	)	brown		1
2	)	white		2
3	)	blue		3
4	)	black		4
FG	)	gray		FG

## Item description

### Short description:

These power cables are an accessory for the WAGO I/O System Field.

Use them as flexible, flame-retardant and halogen-free supply cables for industrial mechanical engineering applications – particularly those with high requirements, e.g., for use in cable chains (drag chains) and moving machine parts.

- Strong resistance to microbes and hydrolysis
- Good to very good weather resistance (UV and ozone)
- High resistance against welding sparks
- Excellent chemical and oil resistance
- Silicon- and PVC-free
- Free from paint-wetting impairment substances
- Flexible at low temperatures

## Data

### Technical data

Connection type	M12 socket - Free end
Pole No.	5
Cable connection direction to mating direction	0°
Connector interface coding (cable/adaptor) 1 1	L-coded

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
 Germantown, WI 53022  
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
 Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
 We are always happy to take your call at {0}.



Cable length	15 m
Operating voltage	63 VDC per IEC 60664-1
Operating current	16 A
Rated surge voltage	1.5 kV per IEC 61076-2-111
Contact resistance	5 mΩ
Insulation resistance	1000 MΩ
Conductor resistance	≤13,7 Ω/km

## Mechanical data

Bending radius	Fixed: >4xØ; Flexible: >7.5xØ
Bending cycles	10 Mio.
Drag chain suitability	Yes
Sheathed cable color	Gray (~ RAL 7040)
Sheathed cable diameter	9.6 ... 10.2 mm
Type code	LiF9YH-11Y-0B 5x1.5mm <sup>2</sup>
Conductor design	Bare copper wire (84 x 0.15 mm)
Conductor insulation	PP9Y (halogen-free)
Housing material	TPU/TPU, black (~ RAL 9005)
Tightening torque	1 Nm
Weight	2108 g

## Environmental requirements

Surrounding air temperature (operation)	-40 ... 90 °C (UL max. +80 °C)
Surrounding air (operating) temperature (dynamic)	-30 ... +90 °C
Surrounding air (operating) temperature (static)	-40 ... +90 °C
Protection type	IP68
Pollution degree (5)	3 per IEC 60664-1

## Commercial data

Packaging type	not packed
Country of origin	DE
GTIN	4055143974486
Customs tariff number	8544429090

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
 Germantown, WI 53022  
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
 Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
 We are always happy to take your call at {0}.



Downloads  
Environmental Product Compliance

Compliance Search

Environmental Product Compliance 756-3501/050-150	URL	Download
Power cable; M12L socket; straight; 5-pole; Length: 15 m		

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at {0}.