



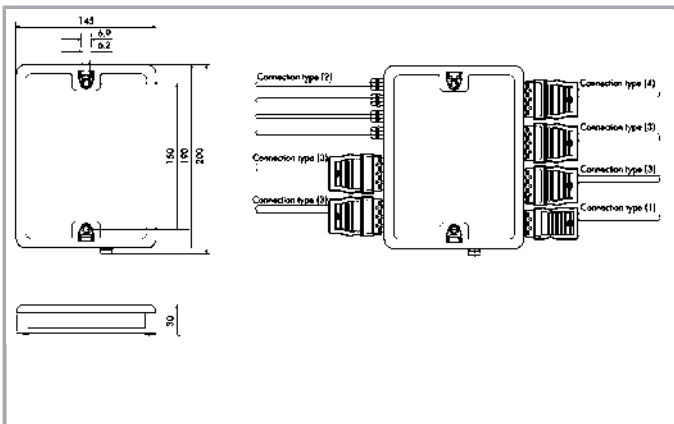

## Data sheet | Item number: 770-629/130-000

WINSTA® sunblind box; 4 push-button inputs; 4 power inputs

[www.wago.com/770-629\\_130-000](http://www.wago.com/770-629_130-000)

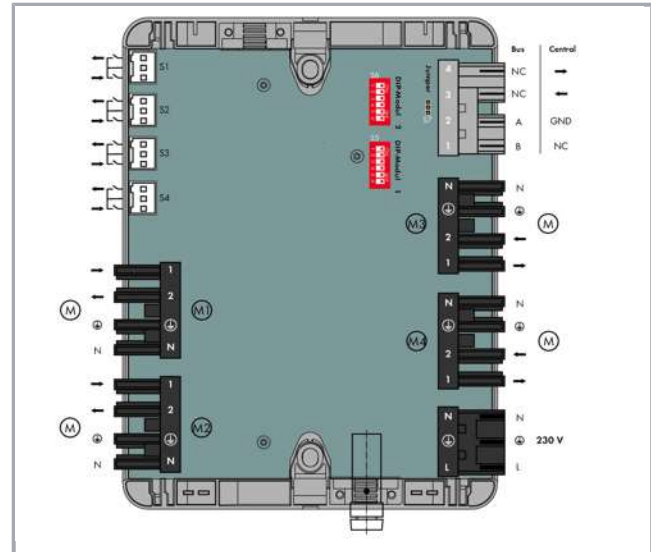

## Item description

### Note on mismatching protection:

All WINSTA® components are 100% protected against mismatching in terms of:

a.) plugging different number of poles

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Data sheet | Item number: 770-629/130-000

[www.wago.com/770-629\\_130-000](http://www.wago.com/770-629_130-000)

b.) plugging when turned by 180°

c.) plugging when laterally staggered

d.) plugging one pole

## Data

### Electrical data

Note on Contact Resistance

approx. 1mΩ contact resistance approx. 0.25mΩ contact transition  
plug/socket

### Ratings per IEC/EN 60664-1

Legend (ratings)

(III / 3) ≙ Overvoltage category III / Pollution degree 3

### Approvals per UL 1977

Rated voltage per UL 1977 (factory wiring only)

600 V

Rated current per UL 1977 (factory wiring only)

23 A

### Geometrical Data

Width

190 mm / 7.48 inch

Height

30 mm / 1.181 inch

Depth

145 mm / 5.709 inch

### Mechanical data

Type of mounting

Wall screw adapter  
Secured to mounting plate

Protection class

IP20

Note on protection class

Only in mated condition (These compact connectors are not  
designed for use in open, easily accessible areas.)

### Plug connection

Mismating protection

Yes

Locking of plug-in connection

locking lever

### Material Data

Insulating material

Polyamide 66 (PA 66)

Contact material

Copper or copper alloy, surface-treated

Weight

450 g

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



## Data sheet | Item number: 770-629/130-000

[www.wago.com/770-629\\_130-000](http://www.wago.com/770-629_130-000)

### Environmental Requirements

Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on Continuous Service Temperature	Insulating parts for temperatures $\leq 105$ °C

### Commercial data

Packaging type	not packed
Country of origin	DE
GTIN	4050821099987
Customs Tariff No.	85371091990

### Counterpart

### Downloads

#### Documentation

##### Manual

WINSTA® Sunblind Box, 4-channel	V 1.2.0	pdf 3.1 MB	Download
---------------------------------	---------	---------------	----------

### Installation Notes

#### Installation



Securing the mounting plate with WINSTA®  
Distribution Box to the wall (e.g., via stud gun).

Subject to changes. Please also observe the further product documentation!