


Data sheet | Item number: 771-8973/206-805

Connecting cable; Plug - free end; 3-pole; 8 m long; Coding S; for distribution connectors (series and two-way circuits); PVC insulated; Conductor ends, bonded: 11 mm; 1,50 mm²; black

www.wago.com/771-8973_206-805

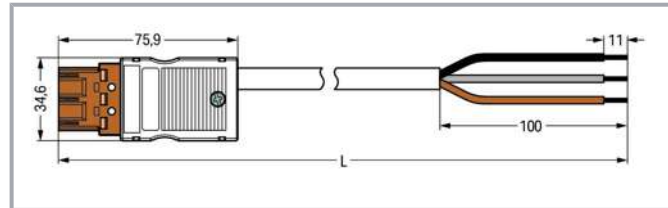

Item description

- Protected against mismatching and maintenance-free

Data

Electrical data

Note on contact resistance

approx. 1 m Ω contact resistance approx. 0.25 m Ω contact transition
plug/socket

IEC Approvals

Rated voltage (III / 3)	250 V
Rated impulse voltage (III/3)	4 kV
Rated current	16 A
Legend (ratings)	(III / 3) \triangleq Overvoltage category III / Pollution degree 3

Ratings per UL

Rated voltage (UL 1977)	600 V
Rated current UL 1977	23 A

Connection data

Total number of potentials	3
Conductor preparation	tip-bonded

Connection 1

Sheathed cable diameter	7.4 ... 9.4 mm
Wire cross-section	1.5 mm ²

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Physical data

Pin spacing	10 mm / 0.394 inch
Total length	8 m

Mechanical data

Coding	S
Marking	1 2 L
Potential Marking	1 2 L
Mating force of a plug-in connection	approx. 20 ... 70 N (depending on pole number)
Retention force of a plug-in connection	when locked: > 80N
Unmating force of a plug-in connection	when unlocked: approx. 20 ... 70 N (depending on pole number)
Number of mating cycles	200, without resistive load 100, with resistive load $I_N = 25$ A, tested (4 mm ² /12 AWG)
Connection type	Plug - Free end
Type of pre-assembled cable	Connecting cable
Cable type	H05VV-F 3x1.5

Plug-in connection

Mismating protection	Yes
Locking lever	no
Locking of plug-in connection	locking lever

Material data

Color	black
Insulation material	Polyamide 66 (PA 66)
Fire class per EN 50575	E _{ca}
Contact material	Copper or copper alloy, surface-treated
Fire load	15.696 MJ
Connector color	brown
Printing color of mating face	white
Strain relief color	black
Printing color of strain relief	white

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
 Germantown, WI 53022
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
 Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



Sheathed cable color	black
Printing color of sheathed cable	white
Sheath material	PVC
Weight	871.3 g

Environmental requirements

Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	PVC cable for temperatures ≤ 70 °C (including halogen-free) Insulating parts for temperatures ≤ 105 °C

Commercial data

PU (SPU)	1 Stück
Packaging type	unpacked
Country of origin VKOrg Germany	DE
GTIN	4045454932428
Customs tariff number VKOrg Germany	85444290900

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.