
Data sheet | Item number: 771-9993/106-1801

pre-assembled connecting cable; Eca; Socket/open-ended; 3-pole; Cod. A; H05VV-F 3G 1.5 mm²; 18 m



www.wago.com/771-9993_106-1801



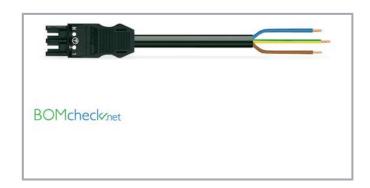

Item description

- Protected against mismating and maintenance-free
- Additional variable coding is possible

Note:

Cables with different fire load are available in the eShop

Safety information 1:

Application note for the U.S. market (USR): Some versions may also be used for current interruption in accordance with the UL certificate in select applications with currents below 16 A and voltages up to 600 V. For further information, please contact your local sales office.

Data

Approvals / Certificates

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
CCA	CCA DEKRA Certification B.V.	EN 61535	NTR NL- 7355
KEMA	KEMA/KEUR DEKRA Certification B.V.	EN 61535	2179129.01

Subject to changes. Please also observe the further product documentation!

WAGO Corporation Germantown, WI 53022

Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222

Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products? We are always happy to take your call at {0}.

Data sheet | Item number: 771-9993/106-1801

www.wago.com/771-9993_106-1801



Required accessories

Locking lever

•	Item no.: 770-101 Locking lever; for flying leads; for manual operation; black	www.wago.com/770-101
*	Item no.: 770-111 Locking lever; for flying leads; for tool operation; black	www.wago.com/770-111
4	Item no.: 770-121 Locking lever; for flying leads; for manual operation; white	www.wago.com/770-121
d	Item no.: 770-131 Locking lever; for flying leads; for tool operation; white	www.wago.com/770-131

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Corporation Germantown, WI 53022

Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222

Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products? We are always happy to take your call at {0}.