
Data sheet | Item number: 771-9993/207-082


H05VV-F 3G 2.5 mm²; 0.8 m; 2,50 mm2; white

pre-assembled connecting cable; Eca; Plug/open-ended; 3-pole; Cod. A;

N/AGO

www.wago.com/771-9993_207-082

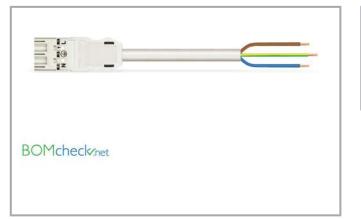



Item description

- Protected against mismating and maintenance-free
- Additional variable coding is possible

Note:

Cables with different fire load are available in the eShop

Safety information 1:

Application note for the U.S. market (USR): Some versions may also be used for current interruption in accordance with the UL certificate in select applications with currents below 16 A and voltages up to 600 V. For further information, please contact your local sales office.

Data

Approvals / Certificates

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
CCA	CCA DEKRA Certification B.V.	EN 61535	NTR NL- 7355

KEMA/KEUR

EN 61535

2179129.01

Subject to changes. Please also observe the further product documentation!

WAGO Corporation	Do you have any questions about our products?		
Germantown, WI 53022	We are always happy to take your call at {0}.		
Phone: 1-800-DIN-RAIL (346-7245) Fax: (262) 255-6222			
Email: info.us@wago.com Web: www.wago.us			





DEKRA Certification B.V.

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Corporation Germantown, WI 53022 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222 Email: info.us@wago.com | Web: www.wago.us Do you have any questions about our products? We are always happy to take your call at {0}.