


## Data sheet | Item number: 8000-099/000-1765

USB 3.0 Panel connector; M22 thread for front installation; Type USB 3.0 A/A  
F/F



[www.wago.com/8000-099\\_000-1765](http://www.wago.com/8000-099_000-1765)

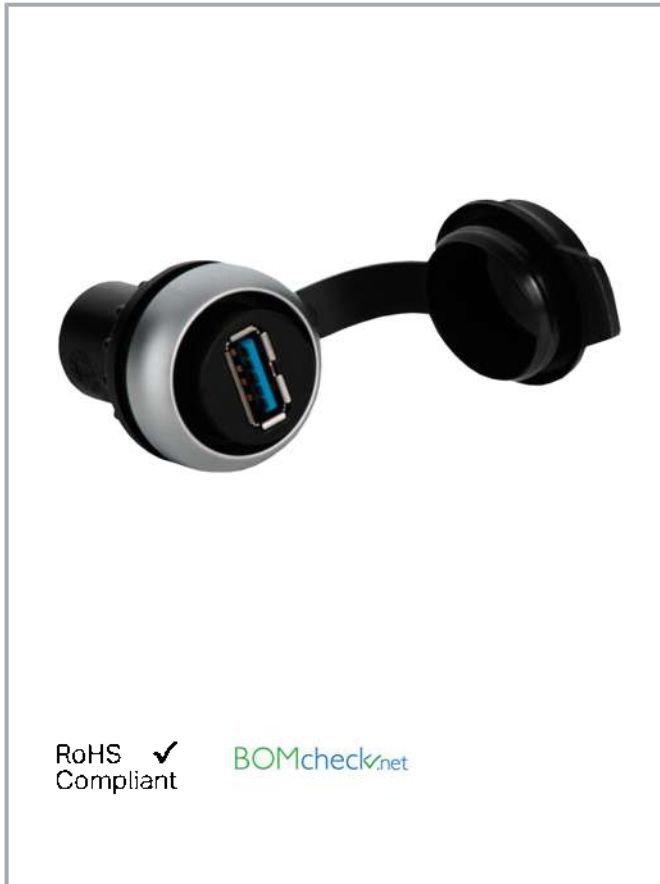

### Data

#### Mechanical data

Mounting type

Front installation

#### Environmental requirements

Surrounding air temperature (operation)

-20 °C ... +70 °C

Surrounding air temperature (storage)

-25 °C ... +80 °C

Protection class

cULus NEMA Type 2, 3R, 4, 4X, 12, 13: IECIP65 with cap closed, IP20  
when connected

Pollution degree (5)

3

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at {0}.



## Technical data

Contact resistance (max.)	0.03 $\Omega$
Rated voltage	30 V
Insulation resistance	>100 M $\Omega$
Rated current	0.9 A
Service life	>100 insertion cycles

## Material data

Contact material	CuSn, gold-plated
Housing material	PA, PVC
Weight	9.1 g
Shield	Shielded

## Physical data

Depth	100 mm
-------	--------

## Downloads

### Environmental Product Compliance

#### Compliance Search

Environmental Product Compliance 8000-099/000-1765	URL	Download
--	-----	----------

## Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at {0}.