


Data sheet | Item number: 857-170

Basic relay; Nominal input voltage: 5 VDC; 1 changeover contact; Limiting continuous current: 6 A; Module width: 5 mm

www.wago.com/857-170

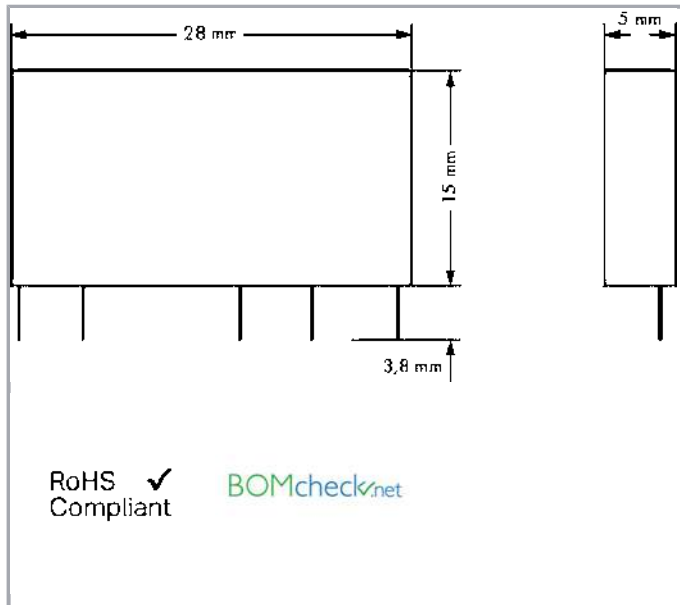

Item description

Note:

- The 60 VDC basic relay must be used for 60 VDC, 110 VDC, 220 VDC and 115 VAC/DC, 230 VAC/DC relay modules.
- Inductive loads have to be attenuated by an appropriate protective circuit in order to protect relay coils and contacts.
- In the case of gold-plated basic relays switching voltages of 30 VDC and currents of 50 mA should not be exceeded. Higher switching power eventually evaporates the gold layer. The resulting deposits in the housing may reduce the service life.

Data

Geometrical Data

Width	5 mm / 0.197 inch
Height from the surface	15 mm / 0.591 inch
Depth	28 mm / 1.09 inch

Mechanical data

Type of mounting	Pluggable module
------------------	------------------

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Material Data

Weight	5 g
--------	-----

Environmental Requirements


Surrounding air (storage) temperature	-40 ... 85 °C
---------------------------------------	---------------

Commercial data

Packaging type	BOX
Country of origin	DE
GTIN	4055143693226
Customs Tariff No.	85364900990

Approvals / Certificates

UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc.	UL 508	E340707

Counterpart

Installation Notes

Installation



Operation of the relay ejector

Subject to changes. Please also observe the further product documentation!