


Data sheet | Item number: 894-8992/023-507

pre-assembled interconnecting cable; Dca; Socket/plug; 2-pole; Cod. F; 5 m;
gray

www.wago.com/894-8992_023-507

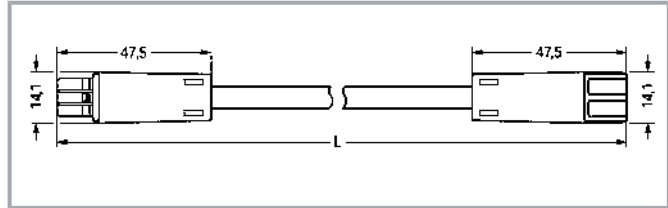

Item description

Cable assembly *WINSTA*® KNX 2-pole

The *WINSTA*® KNX cable assembly with protection against mismatching is the pluggable solution for your application in control cabinets, for lighting connections or on PCBs. WAGO pluggable installation connectors are used when criteria repeat or are distributed on a specific grid, for example for installing grid lighting or flush-mount lighting. The coding options reduce installation errors, allowing fast, secure wiring of all components. The pluggable installation connector is protected against ingress by solid objects in accordance with protection type IP20 (Only when mated and secured with a strain relief housing (These compact connectors are not designed for use in open, easily accessible areas.)). The KNX protocol allows different equipment within one building system to communicate. The grey *WINSTA*® KNX pluggable installation connectors in F coding support applications in the low-voltage domain. Building safety must be ensured at all times, even after the electrical installation stage. The safety requirements in connection with EU CPR are fully satisfied by this product through fire class D. The cable assembly is halogen-free. This eliminates the addition of environmental pollutants during production. It also achieves a higher fire class, since halogen-free materials are flame-resistant.

Fast, secure pluggable connections – cable assemblies from WAGO

The cable assembly is provided with a socket and a plug. *WINSTA*® is the pluggable connection system that is ideally tailored to the strict requirements of electrical installation. It ensures error-free installation of cables and components, quickly and reliably. Now you can also lower installation costs without compromising safety and quality: The *WINSTA*® KNX pluggable installation connector with protection type IP20 reduces the need for servicing and prevents unnecessary downtime.

- products perfectly tailored to your requirements guarantee safe use
- for high-power connections for supplying power
- exact dimensions
- rapid, structured electrical installation

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Data Notes

Note	Cables with a different fire class can be found in the eShop.
------	---

Electrical data

Note on contact resistance	Approx. 3 mΩ contact resistance
----------------------------	---------------------------------

IEC Approvals

Ratings per	IEC/EN 60664-1
Rated voltage (III / 3)	50 V
Rated impulse voltage (III/3)	0.8 kV
Rated current	3 A
Legend (ratings)	(III / 3) ≙ Overvoltage category III / Pollution degree 3

Connection data

Total number of potentials	2
Conductor preparation	ultrasonically tip-bonded

Connection 1

Conductor diameter	0.8 mm
Number of poles	2
Connection type	Socket - Plug

Physical data

Total length	5 m
--------------	-----

Mechanical data

technology	KNX
Application	KNX
Coding	F
Variable coding	No
Marking	1+ 2-
Potential Marking	1+ 2-

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Mating force of a plug-in connection	approx. 10 ... 15 N
Retention force of a plug-in connection	when locked: > 80N
Unmating force of a plug-in connection	Unlocked: approx. 15 ... 20 N
Number of mating cycles	200
Connection type	Socket - Plug
Type of pre-assembled cable	Interconnecting cable
Cable type	J-Y(ST)Y...LG 1x2x0.8
Protection type	IP20; Only when mated and secured with a strain relief housing (These compact connectors are not designed for use in open, easily accessible areas.)

Plug-in connection

Mismating protection	Yes
Note on mismating protection	All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole
Locking of plug-in connection	locking lever

Material data

Note (material data)	Information on material data can be found here
Color	gray
Insulation material	Polyamide (PA66)
Fire class per EN 50575	D _{ca}
Contact material	Copper alloy; surface-treated
Fire load	5.562 MJ
Connector color	light gray
Strain relief color	black
Sheathed cable color	gray
Printing color of sheathed cable	black
Halogen-free	Yes
Sheath material	Halogen-free
Weight	185 g
Copper weight of the pipe	0.01 kg/m

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Environmental requirements

Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	PVC cable for temperatures ≤ 70 °C (including halogen-free) Insulating parts for temperatures ≤ 105 °C

Commercial data

PU (SPU)	1 Stück
Packaging type	unpacked
Country of origin VKOrg Germany	PL
GTIN	4050821473480
Customs tariff number VKOrg Germany	8544429090

Other

technology	KNX
------------	-----

Downloads

Documentation

Bid Text

894-8992/023-507 X81 - Datei	2019 Feb 19	xml 3.1 kB	Download
894-8992/023-507 doc - Datei	2015 Mar 16	doc 25.6 kB	Download

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 894-8992/023-507 pre-assembled interconnecting cable; Dca; Socket/plug; 2-pole; Cod. F; 5 m; gray	URL	Download
---	-----	----------

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Product family

WINSTA® KNX

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.