


Data sheet | Item number: 899-631/105-000

Distribution box; Three-phase to single-phase current (400 V/230 V); 1 input;
6 outputs; Cod. A; MIDI; black

www.wago.com/899-631_105-000

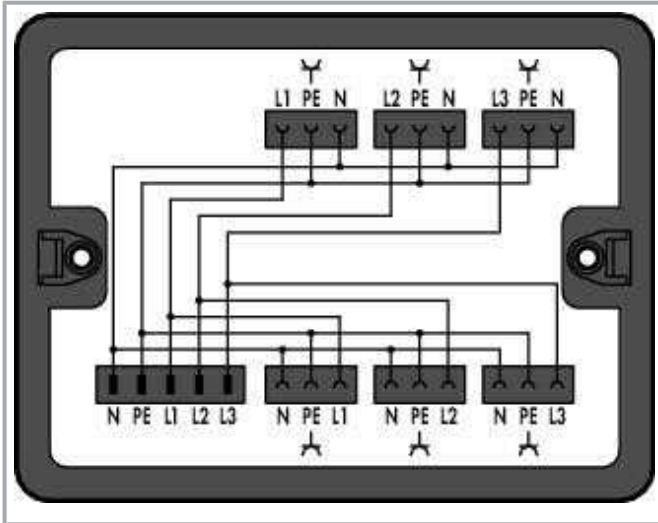

Item description

WINSTA® Boxen rated current 25 A

The distribution box from the *WINSTA®* Boxen product line with a current rating of 25 A is the sophisticated solution for trouble-free electrical installation. With WAGO, you can enjoy the advantages of a large selection of expansions for the *WINSTA®* product line. The coding options reduce installation errors, allowing fast, maintenance-free wiring of all components. The distribution box is protected in accordance with protection type

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). This means that users' fingers will never come into contact with live contact elements. Thanks to the color coding and mechanical A coding of *WINSTA*® Boxen, you can clearly distinguish different circuits. This distribution box can be used for electrical currents up to 25 A. Thus the product is ideally suitable for high power loads.

WINSTA® Boxen solutions for your electrical installation – protected against mismatching and maintenance-free

The *WINSTA*® Pluggable Connection System allows pluggable electrical installation. This significantly reduces the need for servicing and lowers costs. Enjoy the benefits of our maintenance-free spring pressure connection technology too! Plan your installation with *WINSTA*® Boxen with protection against mismatching from WAGO.

- effective protection against mismatching
- intuitive distribution box marking
- cost savings – reduction of on-site waste
- suitable for any application
- convenient installation and commissioning

Data

Electrical data

Note on contact resistance	approx. 1 mΩ contact resistance approx. 0.25 mΩ contact transition (plug/socket)
----------------------------	---

IEC Approvals

Ratings per	IEC/EN 60664-1
Rated voltage (III / 3)	400 V
Rated impulse voltage (III/3)	6 kV
Rated current	25 A
Rated voltage (III/3) 2	250 V
Rated surge voltage (III/3) 2	4 kV
Legend (ratings)	(III / 3) ≙ Overvoltage category III / Pollution degree 3

Physical data

Width	190 mm / 7.48 inch
Height	30 mm / 1.181 inch
Depth	145 mm / 5.709 inch

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Mechanical data

Internal wiring	4 mm ²
Application	General mains applications
Coding	A
Mounting type	Wall, screw mount Installation on mounting plate
Protection type	IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)

Plug-in connection

Mismating protection	Yes
Note on mismating protection	All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole
Locking of plug-in connection	locking lever

Material data

Note (material data)	Information on material data can be found here
Color	black
Insulation material	Polyamide (PA66)
Contact material	Copper or copper alloy; surface-treated
Fire load	71.363 MJ
Weight	440 g

Environmental requirements

Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data

PU (SPU)	1 Stück
Packaging type	box
Country of origin VKOrg Germany	DE
GTIN	4055143290142

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Customs tariff number VKOrg Germany

85366990990

Counterpart


Item no. 770-113
Plug; with strain relief housing; 3-pole; 4,00 mm²; blackwww.wago.com/770-113
Item no. 770-105
Socket; with strain relief housing; 5-pole; Cod. A; 4,00 mm²; blackwww.wago.com/770-105
Item no. 770-305
Socket; with strain relief housing; 5-pole; Cod. A; 4,00 mm²; blackwww.wago.com/770-305
Item no. 770-405
Socket; 5-pole; Cod. A; 4,00 mm²; blackwww.wago.com/770-405
Item no. 770-205
Socket; 5-pole; Cod. A; 4,00 mm²; blackwww.wago.com/770-205
Item no. 770-213/035-000
Plug; with strain relief housing; 3-pole; 4,00 mm²; blackwww.wago.com/770-213/035-000
Item no. 770-213
Plug; 3-pole; 4,00 mm²; blackwww.wago.com/770-213

Optional accessories

Mounting

Mounting accessories

Item no.: 770-680

Mounting plate; for distribution boxes

www.wago.com/770-680

Downloads

Documentation

Bid Text

899-631/105-000	2019 Feb 19	xml	Download
X81 - Datei		3.6 kB	
899-631/105-000	2015 Feb 23	doc	Download
doc - Datei		26.6 kB	

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
 Germantown, WI 53022
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
 Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



Environmental Product Compliance

Compliance Search

Environmental Product Compliance 899-631/105-000

URL

Download

Distribution box; Three-phase to single-phase current (400 V/230 V); 1 input; 6 outputs; Cod. A; MIDI; black

Installation Notes

Installation



Securing the mounting plate with WINSTA®
Distribution Box to the wall (e.g., via stud gun).

Product family

WINSTA® boxes

WINSTA® ist das Steckverbindersystem, das optimal auf die hohen Anforderungen in der Gebäudeinstallation zugeschnitten ist. Es macht die Elektroinstallation steckbar und dadurch schnell, sicher und fehlerfrei. Dies gilt auch in weiteren Anwendungen wie z. B. im Schiffbau, in der Bahntechnik oder in der Industrie.

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.