

Snap-in socket; 3-pole; Cod. R; 4,00 mm²; orange

www.wago.com/770-2343







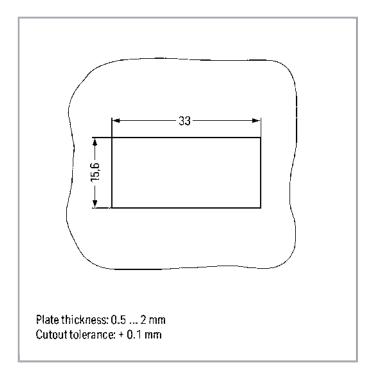

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO Kontakttechnik GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/770-2343



Item description

- Protected against mismating and maintenance-free
- Push-in CAGE CLAMP® spring pressure connection technology allows solid conductors to be simply pushed into a unit
- Two-wire connection per pole for loops or bridges
- Additional variable coding is possible

Note:

All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug /socket).

Note on mismating protection:

All WINSTA® components are 100% protected against mismating when:

- a.) plugging different numbers of poles
- b.) plugging while rotated 180
- c.) plugging while laterally staggered
- d.) plugging one pole

Safety information 1:

Application note for the U.S. market (USR): Some versions may also be used for current interruption in accordance with the UL certificate in select applications with currents below 16 A and voltages up to 600 V. For further information, please contact your local sales office.

Data

Electrical data

Note on Contact Resistance	approx. 1 m Ω of contact resistance approx. 0.25 m Ω contact
	transition plug/socket

Ratings per IEC/EN 60664-1

Ratings per	IEC/EN 60664-1
Rated voltage (III / 3)	250 V
Rated impulse voltage (III / 3)	4 kV
Rated current	25 A
Legend (ratings)	(III / 3) ≙ Overvoltage category III / Pollution degree 3

Approvals per UL 1977

Rated voltage per UL 1977 (factory wiring only)	600 V
Rated current per UL 1977 (factory wiring only)	23 A

Connection data

Connection technology

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/770-2343



Push-in CAGE CLAMP [®]
Operating tool
Push-in
4 mm²
0,5 4 mm² / 20 12 AWG
1,5 4 mm² / 16 12 AWG
0,5 2,5 mm² / 20 14 AWG
0,5 4 mm² / 20 12 AWG
0,25 1,5 mm² / 20 16 AWG
0,25 2,5 mm² / 20 14 AWG
1,5 mm ² / 16 AWG
9 mm / 0.35 inch
see also packaging or instructions
3
6
3
0°

Geometrical Data

Pin spacing	10 mm / 0.394 inch
Width	35,5 mm / 1.398 inch
Height	17,5 mm / 0.689 inch
Depth	36 mm / 1.417 inch

Mechanical data

Coding	R
Mating force of a plug-in connection	approx. 20 70 N (depending on pole number)
Retention force of a plug-in connection	Locked: > 80 N
Unmating force of a plug-in connection	Unlocked: approx. 20 70 N (depending on pole number)
Number of mating cycles	200, without resistive load
	100, with resistive load $I_N = 25 \text{ A}$, tested (4 mm ² /AWG 12)
Gehäuseblechstärke	0,5 2 mm / 0.02 0.079 inch
Mounting type	Snap-in
Marking	LONLONS

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/770-2343



Protection class	Only when mated (these compact connectors are not designed for use in open, easily accessible areas).	
Note on protection class		
Potential marking	LONLONS	
Application	LON Bus	

Plug connection

Contact type (pluggable connector)	Female connector/socket
Connector connection type	for conductor
Mismating protection	Yes
Locking of plug-in connection	locking lever
Locking lever	yes

Material Data

Color	orange	
Insulating material	Polyamide 66 (PA 66)	
Clamping spring material	Chrome nickel spring steel (CrNi)	
Contact material	Copper or copper alloy (surface-treated)	
Fire load	0.232 MJ	
Weight	11.9 g	

Environmental Requirements

Processing temperature	-5 +40 °C	
Continuous operating temperature	-35 +85 °C	
Note on Continuous Service Temperature	Insulating parts for temperatures ≤ 105 °C	

Commercial data

Packaging type	BOX
Country of origin	DE
GTIN	4044918252751
Customs Tariff No.	85366990990

Approvals / Certificates

Country specific Approvals

	CCA	EN 61535	2173495.02
Logo	Approval	Additional Approval Text	name
			Certificate

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.





DEKRA Certification B.V.

Ship Approvals

			Certificate
Logo	Approval	Additional Approval Text	name
ABS.	ABS	-	19-
THE STATE OF THE S	American Bureau of Shipping		HG1868589-
THE PROPERTY OF			PDA
SEROVED PA	DNV GL	-	TAE00001Z6
DNV·GL	Det Norske Veritas, Germanischer Lloyd		
	LR	IEC 61984	02/20050
PART LANGUAGE TO A SOUND THE SOUND T	Lloyds Register		(E6)
UL-Approv	als		
			Certificate
Logo	Approval	Additional Approval Text	name
	cURus	UL 1977	E45171

Counterpart



Item no.770-1353

Plug; 3-pole; Cod. R; 4,00 mm²; orange

Underwriters Laboratories Inc.

www.wago.com/770-1353

Compatible products

tools

Item no.: 210-719
Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft

Item no.: 770-383
Operating tool; 3-way; green

www.wago.com/210-719

www.wago.com/770-383

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

Sec. 9

www.wago.com/770-2343



protection		
1	ltem no.: 770-201 Lockout cap; 12-pole, separable; 12-pole; for sockets; black	www.wago.com/770-201
1	Item no.: 770-221 Lockout cap; for socket; 12-pole; separable; white	www.wago.com/770-221
	Item no.: 770-643 Lockout cap; 3-pole; for cutouts; Plastic; black	www.wago.com/770-643
1	Item no.: 770-693 Lockout cap; 3-pole; for cutouts; Plastic; white	www.wago.com/770-693

Downloads Documentation

Bid Text

770-2343 doc - Datei	Jun 8, 2015	doc 23.6 kB	Download
770-2343 GAEB X81 - Datei	Feb 19, 2019	xml 3.0 kB	Download

CAD/CAE-Data

CAE data

EPLAN Data Portal 770-2343	URL	Download
WSCAD Universe 770-2343	URL	Download

Installation Notes

Conductor termination


Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG Hansastr. 27 32423 Minden


Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/770-2343






1. Strip length, outer insulation = 35 mm (2-pole), 55 mm (3- to 5-pole)




To terminate fine-stranded conductors, open the clamping unit via screwdriver (2.5 mm blade width) and insert stripped conductor until it hits backstop.



Insert stripped solid conductor until it hits backstop.

2. Strip length = 9 mm

3. Extended ground conductor = 8 mm



To terminate fine-stranded conductors, open the clamping unit via screwdriver (2.5 mm blade width) and insert stripped conductor until it hits backstop.


Conductor removal

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

www.wago.com/770-2343





To remove the conductor, actuate the clamp via screwdriver (2.5 mm blade width) and pull out the conductor.



Seal unused cutout with lockout cap.

Product family

<i>WINSTA</i>® MIDI
Show all products from the family

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com