## Data sheet | Item number: 869-157

Terminal strip; 7-pole; without push-buttons; with snap-in mounting feet; for plate thickness 0.6 - 1.2 mm; Fixing hole 3.5 + 0.1 mm Ø; 2.5 mm²; CAGE CLAMP®; 2,50 mm²; gray

www.wago.com/869-157

### Item description

**Safety information 1:**
Max. insulation diameter: 4.4 mm

### Data
### Electrical data

### Ratings per IEC/EN 60664-1

| | |
|---|---|
| Rated voltage (III / 3) | 500 V |
| Rated impulse voltage (III / 3) | 6 kV |
| Rated current | 24 A |
| Legend (ratings) | (III / 3) ≙ Overvoltage category III / Pollution degree 3 |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

## Connection data

| | |
|---|---|
| Connection technology | CAGE CLAMP® |
| Actuation type | Operating tool |
| Connectable conductor materials | Copper |
| Solid conductor | 0.08 … 2.5 mm² / 28 … 12 AWG |
| Fine-stranded conductor | 0.08 … 4 mm² / 28 … 12 AWG |
| Strip length | 6 … 7 mm / 0.24 … 0.28 inch |
| No. of poles | 7 |
| Total number of connection points | 14 |
| Total number of potentials | 7 |
| Number of levels | 1 |
| Type of wiring | Front-entry wiring |

## Geometrical Data

| | |
|---|---|
| Width | 37.5 mm / 1.476 inch |
| Height from the surface | 27.6 mm / 1.087 inch |
| Depth | 33.4 mm / 1.315 inch |
| Module width | 5 mm / 0.197 inch |

## Mechanical data

| | |
|---|---|
| Design | horizontal |
| Mounting type | Snap-in mounting foot |
| Marking level | Side marking |

## Material Data

| | |
|---|---|
| Color | gray |
| Fire load | 0.555 MJ |
| Weight | 30.2 g |

## Commercial data

| | |
|---|---|
| Packaging type | BOX |
| Country of origin | DE |
| GTIN | 4044918481212 |
| Customs Tariff No. | 85369010000 |

## Approvals / Certificates

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

### Country specific Approvals

| Logo | Approval | Additional Approval Text | Certificate name |
|---|---|---|---|
| | **CCA**<br>DEKRA Certification B.V. | EN 60947 | 2143311.02 |
| | **CCA**<br>DEKRA Certification B.V. | EN 60947 | NTR NL 6827/A1 |

### Ship Approvals

| Logo | Approval | Additional Approval Text | Certificate name |
|---|---|---|---|
| | **ABS**<br>American Bureau of Shipping | EN 60947 | 20-HG1941090-PDA |
| | **DNV GL**<br>Det Norske Veritas, Germanischer Lloyd | - | TAE00001V2 |

### UL-Approvals

| Logo | Approval | Additional Approval Text | Certificate name |
|---|---|---|---|
| | **UL**<br>UL International Germany GmbH | UL 1059 | 20160630-E45172 |

## Counterpart

## Compatible products



WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

| | | |
|---|---|---|
| **Insulation stop** | | |
| | **Item no.: 280-470**<br>Insulation stop; 0.08 - 0.2 mm² "s" (0.14 mm² "f-st"); 5 pieces/strip; white | www.wago.com/280-470 |
| | **Item no.: 280-471**<br>Insulation stop; 0.25 - 0.5 mm²; 5 pieces/strip; light gray | www.wago.com/280-471 |
| | **Item no.: 280-472**<br>Insulation stop; 0.75 - 1 mm²; 5 pieces/strip | www.wago.com/280-472 |
| **tools** | | |
| | **Item no.: 210-657**<br>Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; short | www.wago.com/210-657 |
| | **Item no.: 210-658**<br>Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; angled; short | www.wago.com/210-658 |
| | **Item no.: 210-720**<br>Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft | www.wago.com/210-720 |
| **End plate** | | |
| | **Item no.: 869-375**<br>End plate; for terminal blocks with snap-in mounting foot; 2.5 mm thick; gray | www.wago.com/869-375 |
| | **Item no.: 869-377**<br>End plate; for terminal blocks with snap-in mounting foot; 2.5 mm thick; light gray | www.wago.com/869-377 |
| | **Item no.: 869-378**<br>End plate; for terminal blocks with snap-in mounting foot; 2.5 mm thick; blue | www.wago.com/869-378 |
| | **Item no.: 869-379**<br>End plate; for terminal blocks with snap-in mounting foot; 2.5 mm thick; green-yellow | www.wago.com/869-379 |
| **Carrier rail** | | |
| | **Item no.: 210-112**<br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm | www.wago.com/210-112 |
| | **Item no.: 210-113**<br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715 | www.wago.com/210-113 |
| | **Item no.: 210-114**<br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715 | www.wago.com/210-114 |
| | **Item no.: 210-115**<br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm | www.wago.com/210-115 |
| | **Item no.: 210-118**<br>Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715 | www.wago.com/210-118 |
| | **Item no.: 210-154**<br>Aluminum carrier rail; 1000 mm long; 18 mm wide; 7 mm high; silver-colored | www.wago.com/210-154 |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

| | | |
|---|---|---|
| | **Item no.: 210-196**<br>Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored | www.wago.com/210-196 |
| | **Item no.: 210-197**<br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715 | www.wago.com/210-197 |
| | **Item no.: 210-198**<br>Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored | www.wago.com/210-198 |
| | **Item no.: 210-504**<br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715 | www.wago.com/210-504 |
| | **Item no.: 210-505**<br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715 | www.wago.com/210-505 |
| | **Item no.: 210-506**<br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715 | www.wago.com/210-506 |
| | **Item no.: 210-508**<br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715 | www.wago.com/210-508 |
| **Jumper** | | |
|  | **Item no.: 870-402**<br>Push-in type jumper bar; insulated; 2-way; Nominal current 18 A; light gray | www.wago.com/870-402 |
| | **Item no.: 870-403**<br>Push-in type jumper bar; insulated; 3-way; Nominal current 18 A; light gray | www.wago.com/870-403 |
| | **Item no.: 870-404**<br>Push-in type jumper bar; insulated; 4-way; Nominal current 18 A; light gray | www.wago.com/870-404 |
| | **Item no.: 870-405**<br>Push-in type jumper bar; insulated; 5-way; Nominal current 18 A; light gray | www.wago.com/870-405 |
| | **Item no.: 870-405/011-000**<br>Ready-made push-in type jumper bar; insulated; 3-way (1-3-5); Nominal current 18 A; light gray | www.wago.com/870-405/011-000 |
| | **Item no.: 870-406**<br>Push-in type jumper bar; insulated; 6-way; Nominal current 18 A; light gray | www.wago.com/870-406 |
| | **Item no.: 870-407**<br>Push-in type jumper bar; insulated; 7-way; Nominal current 18 A; light gray | www.wago.com/870-407 |
| | **Item no.: 870-407/011-000**<br>Ready-made push-in type jumper bar; insulated; 1-3-5-7; Nominal current 18 A; light gray | www.wago.com/870-407/011-000 |
| | **Item no.: 870-408**<br>Push-in type jumper bar; insulated; 8-way; Nominal current 18 A; light gray | www.wago.com/870-408 |
| | **Item no.: 870-409**<br>Push-in type jumper bar; insulated; 9-way; Nominal current 18 A; light gray | www.wago.com/870-409 |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

| | | |
|---|---|---|
| | **Item no.: 870-409/011-000**<br>Ready-made push-in type jumper bar; insulated; 1-3-5-7-9; Nominal current 18 A; light gray | www.wago.com/870-409/011-000 |
| | **Item no.: 870-410**<br>Push-in type jumper bar; insulated; 10-way; Nominal current 18 A; light gray | www.wago.com/870-410 |
| | **Item no.: 870-433**<br>Push-in type jumper bar; insulated; from 1 to 3; Nominal current 18 A; light gray | www.wago.com/870-433 |
| | **Item no.: 870-434**<br>Push-in type jumper bar; insulated; from 1 to 4; Nominal current 18 A; light gray | www.wago.com/870-434 |
| | **Item no.: 870-435**<br>Push-in type jumper bar; insulated; from 1 to 5; Nominal current 18 A; light gray | www.wago.com/870-435 |
| | **Item no.: 870-440**<br>Push-in type jumper bar; insulated; from 1 to 10; Nominal current 18 A; light gray | www.wago.com/870-440 |
| **ferrule** | | |
| | **Item no.: 216-121**<br>Ferrule; Sleeve for 0.5 mm² / AWG 22; uninsulated; electro-tin plated | www.wago.com/216-121 |
| | **Item no.: 216-122**<br>Ferrule; Sleeve for 0.75 mm² / AWG 20; uninsulated; electro-tin plated | www.wago.com/216-122 |
| | **Item no.: 216-123**<br>Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated | www.wago.com/216-123 |
| | **Item no.: 216-124**<br>Ferrule; Sleeve for 1.5 mm² / AWG 16; uninsulated; electro-tin plated | www.wago.com/216-124 |
|  | **Item no.: 216-131**<br>Ferrule; Sleeve for 0.25 mm² / AWG 24; uninsulated; electro-tin plated | www.wago.com/216-131 |
| | **Item no.: 216-132**<br>Ferrule; Sleeve for 0.34 mm² / AWG 24; uninsulated; electro-tin plated | www.wago.com/216-132 |
| | **Item no.: 216-221**<br>Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; white | www.wago.com/216-221 |
| | **Item no.: 216-222**<br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray | www.wago.com/216-222 |
| | **Item no.: 216-223**<br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red | www.wago.com/216-223 |
| | **Item no.: 216-224**<br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black | www.wago.com/216-224 |
| | **Item no.: 216-321**<br>Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow | www.wago.com/216-321 |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

| | | |
|---|---|---|
| | **Item no.: 216-322**<br>Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; green | www.wago.com/216-322 |

**Marking accessories**

| | | |
|---|---|---|
| | **Item no.: 2009-115**<br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white | www.wago.com/2009-115 |
| | **Item no.: 2009-115/000-002**<br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow | www.wago.com/2009-115/000-002 |
| | **Item no.: 2009-115/000-006**<br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue | www.wago.com/2009-115/000-006 |
| | **Item no.: 2009-115/000-007**<br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray | www.wago.com/2009-115/000-007 |
| | **Item no.: 2009-115/000-012**<br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange | www.wago.com/2009-115/000-012 |
| | **Item no.: 2009-115/000-017**<br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green | www.wago.com/2009-115/000-017 |
| | **Item no.: 2009-115/000-023**<br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green | www.wago.com/2009-115/000-023 |
| | **Item no.: 2009-115/000-024**<br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet | www.wago.com/2009-115/000-024 |
|  | **Item no.: 2009-145**<br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white | www.wago.com/2009-145 |
|  | **Item no.: 2009-145/000-002**<br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow | www.wago.com/2009-145/000-002 |
|  | **Item no.: 2009-145/000-005**<br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red | www.wago.com/2009-145/000-005 |
|  | **Item no.: 2009-145/000-006**<br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue | www.wago.com/2009-145/000-006 |
|  | **Item no.: 2009-145/000-007**<br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray | www.wago.com/2009-145/000-007 |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

| | | |
|---|---|---|
|  | **Item no.: 2009-145/000-012**<br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange | www.wago.com/2009-145/000-012 |
|  | **Item no.: 2009-145/000-023**<br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green | www.wago.com/2009-145/000-023 |
|  | **Item no.: 2009-145/000-024**<br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet | www.wago.com/2009-145/000-024 |
| | **Item no.: 248-501**<br>Miniature WSB Quick marking system; plain; Marker width 5 mm; 10 strips with 10 markers per card | www.wago.com/248-501 |
| | **Item no.: 248-501/000-002**<br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow | www.wago.com/248-501/000-002 |
| | **Item no.: 248-501/000-005**<br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red | www.wago.com/248-501/000-005 |
| | **Item no.: 248-501/000-006**<br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue | www.wago.com/248-501/000-006 |
| | **Item no.: 248-501/000-007**<br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray | www.wago.com/248-501/000-007 |
| | **Item no.: 248-501/000-012**<br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange | www.wago.com/248-501/000-012 |
| | **Item no.: 248-501/000-017**<br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green | www.wago.com/248-501/000-017 |
| | **Item no.: 248-501/000-023**<br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green | www.wago.com/248-501/000-023 |
| | **Item no.: 248-501/000-024**<br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet | www.wago.com/248-501/000-024 |
| | **Item no.: 709-177**<br>Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; translucent | www.wago.com/709-177 |
| | **Item no.: 709-178**<br>Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; white | www.wago.com/709-178 |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

| | | |
|---|---|---|
|  | **Item no.: 709-196**<br>Marking strips; for laser printer; translucent | www.wago.com/709-196 |
|  | **Item no.: 709-198**<br>Marking strips; white | www.wago.com/709-198 |
|  | **Item no.: 793-501**<br>WMB marking card; as card; not stretchable; plain; snap-on type; white | www.wago.com/793-501 |
| | **Item no.: 793-501/000-002**<br>WMB marking card; as card; not stretchable; plain; snap-on type; yellow | www.wago.com/793-501/000-002 |
| | **Item no.: 793-501/000-005**<br>WMB marking card; as card; not stretchable; plain; snap-on type; red | www.wago.com/793-501/000-005 |
| | **Item no.: 793-501/000-006**<br>WMB marking card; as card; not stretchable; plain; snap-on type; blue | www.wago.com/793-501/000-006 |
| | **Item no.: 793-501/000-007**<br>WMB marking card; as card; not stretchable; plain; snap-on type; gray | www.wago.com/793-501/000-007 |
| | **Item no.: 793-501/000-012**<br>WMB marking card; as card; not stretchable; plain; snap-on type; orange | www.wago.com/793-501/000-012 |
| | **Item no.: 793-501/000-017**<br>WMB marking card; as card; not stretchable; plain; snap-on type; light green | www.wago.com/793-501/000-017 |
| | **Item no.: 793-501/000-023**<br>WMB marking card; as card; not stretchable; plain; snap-on type; green | www.wago.com/793-501/000-023 |
| | **Item no.: 793-501/000-024**<br>WMB marking card; as card; not stretchable; plain; snap-on type; violet | www.wago.com/793-501/000-024 |
|  | **Item no.: 793-5501**<br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white | www.wago.com/793-5501 |
| | **Item no.: 793-5501/000-002**<br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; yellow | www.wago.com/793-5501/000-002 |
| | **Item no.: 793-5501/000-005**<br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; red | www.wago.com/793-5501/000-005 |
| | **Item no.: 793-5501/000-006** | |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

| | | |
|---|---|---|
| | WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; blue | www.wago.com/793-5501/000-006 |
| | **Item no.: 793-5501/000-007**<br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; gray | www.wago.com/793-5501/000-007 |
| | **Item no.: 793-5501/000-012**<br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; orange | www.wago.com/793-5501/000-012 |
| | **Item no.: 793-5501/000-017**<br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; green | www.wago.com/793-5501/000-017 |
| | **Item no.: 793-5501/000-023**<br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; light green | www.wago.com/793-5501/000-023 |
| | **Item no.: 793-5501/000-024**<br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; violet | www.wago.com/793-5501/000-024 |
| **check** | | |
| | **Item no.: 210-136**<br>Test plug; 2 mm Ø; with 500 mm cable; red | www.wago.com/210-136 |
| | **Item no.: 210-137**<br>Test plug; 2.3 mm Ø; with 500 mm cable; yellow | www.wago.com/210-137 |
| **assembling** | | |
| | **Item no.: 209-120**<br>Mounting foot; can be snapped on terminal blocks with snap-in mounting foot; for mounting on relay-modules; 6.4 mm wide; gray | www.wago.com/209-120 |
| | **Item no.: 209-122**<br>Plastic end stop; for WSB markers; for 210-154 aluminum rail; gray | www.wago.com/209-122 |

## Downloads

### CAD/CAE-Data

**CAD data**

| | | |
|---|---|---|
| 2D/3D Models 869-157 | URL | Download |

**CAE data**

| | | |
|---|---|---|
| WSCAD Universe 869-157 | URL | Download |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

## Installation Notes

### Jumpered

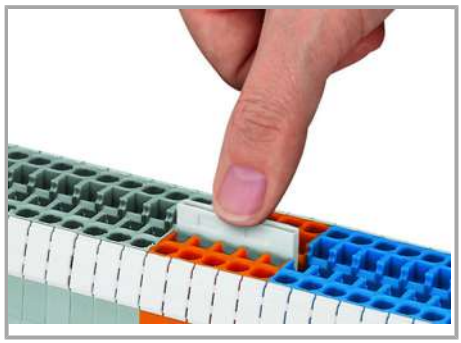

Push jumper bars down firmly until fully inserted. When using multipole bars, push alternately on the right and then left side, until installed.

Push-in type jumper bars 1 – 3 – 5 – 7 or
1 – – 4 – – 7

upon request

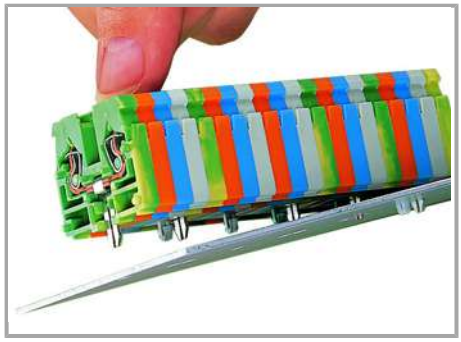

Mounting a terminal strip with snap-in feet into holes.

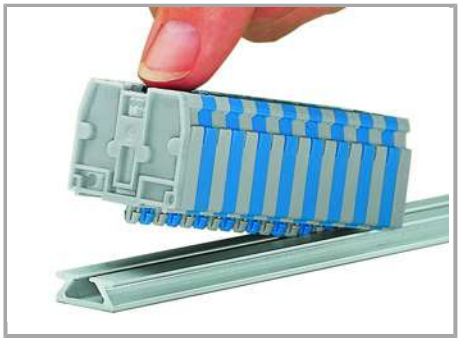

Mounting a terminal strip with snap-in feet onto aluminum rail.

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

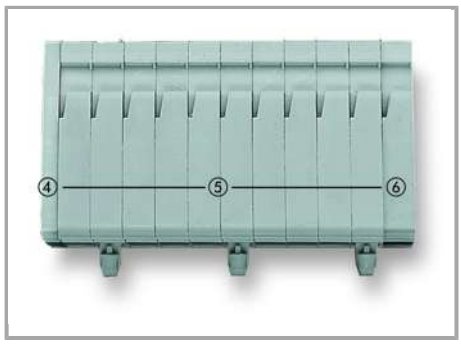


Terminal strip with snap-in mounting feet:

- End plate
- 
- Center terminal blocks with/without snap-in mounting feet
- 
- End terminal block with/without snap-in mounting foot
- 

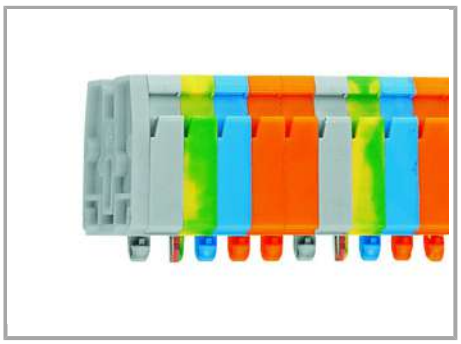

Terminal strips with snap-in mounting feet,

for 0.6 … 1.2 mm plate thickness,

mounting holes: $3.5^{+0.1}$ mm Ø

**Cover**

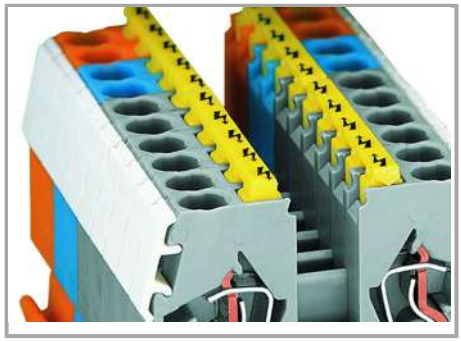

Protective warning markers (280-405), with a black high-voltage symbol

**Marking**



WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

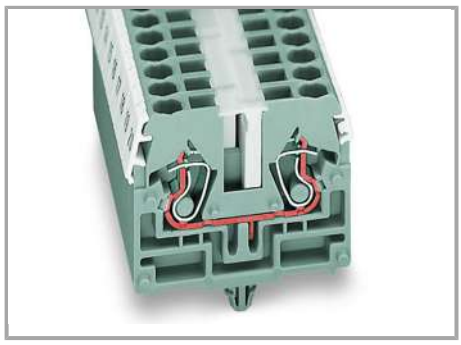

WMB markers in Mini-WSB marker slots

Marking strip, translucent

Mini-WSB markers

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.