

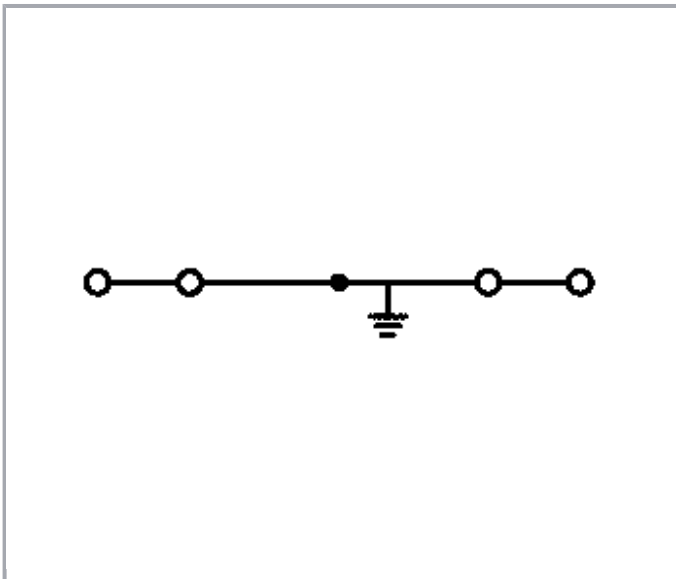


**Data sheet | Item number: 281-657**

4-conductor ground terminal block; 4 mm<sup>2</sup>; center marking; for DIN-rail 35 x 15 and 35 x 7.5; CAGE CLAMP®; 4,00 mm<sup>2</sup>; green-yellow

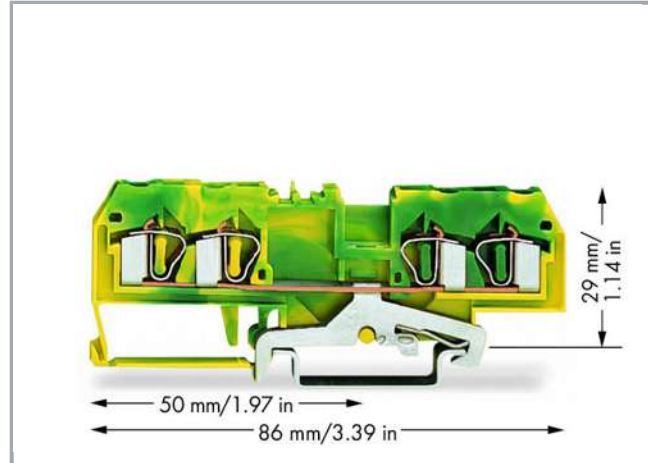

[www.wago.com/281-657](http://www.wago.com/281-657)

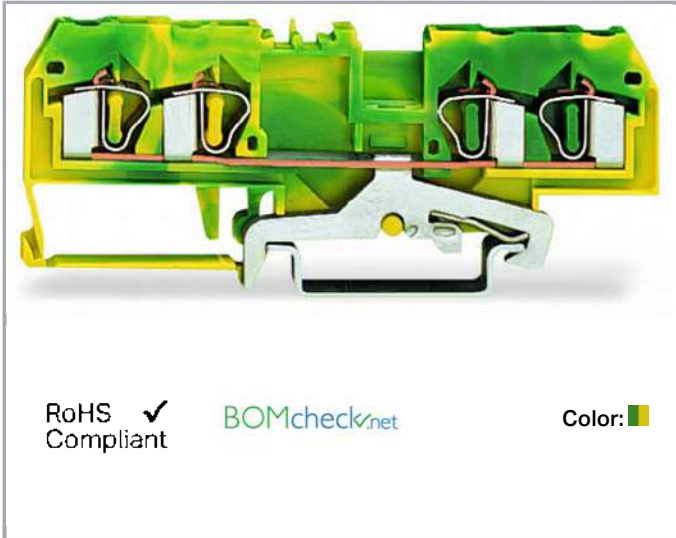

**Item description**

**Note:**

**Terminating Aluminum Conductors**

WAGO spring clamp terminal blocks are suitable for solid aluminum conductors up to 4 mm<sup>2</sup>/12 AWG if WAGO "Alu-Plus" Contact Paste is used for termination.

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



"Alu-Plus" Contact Paste Advantages:

- Automatically destroys the oxide film during clamping.
- Prevents fresh oxidation at the clamping point.
- Prevents electrolytic corrosion between aluminum and copper conductors (in the same terminal block).
- Provides long-term protection against corrosion.

Using terminal blocks with CAGE CLAMP® Spring Pressure Connection Technology, **aluminum conductors must first be cleaned with a blade** and then immediately be inserted into the clamping units filled with "Alu-Plus" Contact Paste.

It is also possible to apply WAGO "Alu-Plus" **additionally** on the whole surface of the aluminum conductor before termination.

Please note that the nominal currents must be adapted to the reduced conductivity of the aluminum conductors::

2.5 mm<sup>2</sup> = 16 A

4 mm<sup>2</sup> = 22 A

## Data

### Electrical data

#### Ratings per IEC/EN 60664-1

|             |                  |
|-------------|------------------|
| Ratings per | IEC/EN 60947-7-2 |
|-------------|------------------|

#### Connection data

|                                   |  |
|-----------------------------------|--|
| Connection technology             | CAGE CLAMP®                                |
| Actuation type                    | Operating tool                             |
| Connectable conductor materials   | Copper<br>Aluminum                         |
| Solid conductor                   | 0,08 ... 4 mm <sup>2</sup> / 28 ... 12 AWG |
| Fine-stranded conductor           | 0,08 ... 4 mm <sup>2</sup> / 28 ... 12 AWG |
| Strip length                      | 9 ... 10 mm / 0.35 ... 0.39 inch           |
| Total number of connection points | 4  |
| Total number of potentials        | 1  |
| Number of levels                  | 1  |
| Type of wiring                    | Front-entry wiring                         |

#### Geometrical Data

|       |                   |
|-------|-------------------|
| Width | 6 mm / 0.236 inch |
|-------|-------------------|

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.

|                                       |                    |
|---------------------------------------|--------------------|
| Height from upper-edge of DIN-35 rail | 29 mm / 1.142 inch |
| Depth                                 | 86 mm / 3.386 inch |

### Mechanical data

|                  |                 |
|------------------|-----------------|
| Design           | horizontal type |
| Type of mounting | DIN-35 rail     |
| Marking level    | Center marking  |

### Material Data




|                     |                      |
|---------------------|----------------------|
| Color               | green-yellow         |
| Insulating material | Polyamide 66 (PA 66) |
| Fire load           | 0.193 MJ             |
| Weight              | 17.6 g               |

### Commercial data

|                    |                                  |
|--------------------|----------------------------------|
| Product Group      | 1 (Rail Mounted Terminal Blocks) |
| Packaging type     | BOX                              |
| Country of origin  | DE                               |
| GTIN               | 4044918512008                    |
| Customs Tariff No. | 85369010000                      |





### Approvals / Certificates

#### Country specific Approvals


| Logo   | Approval                              | Additional Approval Text | Certificate name |
|--|---------------------------------------|--------------------------|------------------|
|  | CCA<br>DEKRA Certification B.V.       | EN 60947, IEC 60947      | NTR NL-7454/A1   |
|  | CSA<br>DEKRA Certification B.V.       | C22.2 No. 158            | 1505034          |
|  | KEMA/KEUR<br>DEKRA Certification B.V. | EN 60947                 | 71-107288        |

#### Ship Approvals

Subject to changes. Please also observe the further product documentation!

| Logo  | Approval  | Additional Approval Text | Certificate name         |
|---|---|--------------------------|--------------------------|
|   | <b>ABS</b><br>American Bureau of Shipping               | -                        | 20-<br>HG1941090-<br>PDA |
|  | <b>BV</b><br>Bureau Veritas S.A.                        | EN 60947                 | 07436/E0 BV              |
|   | <b>DNV GL</b><br>Det Norske Veritas, Germanischer Lloyd | -                        | TAE00001V2               |
|  | <b>LR</b><br>Lloyds Register                            | EN 60947                 | 91/20112<br>(E9)         |

**UL-Approvals**

| Logo   | Approval                                   | Additional Approval Text | Certificate name    |
|--|--|--------------------------|---------------------|
|  | <b>UL</b><br>UL International Germany GmbH | UL 1059                  | 20190731-<br>E45172 |

**Counterpart**

**Compatible products**

**Protective Warning Marker**

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.



Item no.: 281-415

Protective warning marker; with high-voltage symbol, black; for 5 terminal blocks; yellow

[www.wago.com/281-415](http://www.wago.com/281-415)

## End plate



Item no.: 281-334

End and intermediate plate; 2.5 mm thick; gray

[www.wago.com/281-334](http://www.wago.com/281-334)

Item no.: 281-335

End and intermediate plate; 2.5 mm thick; orange

[www.wago.com/281-335](http://www.wago.com/281-335)

Item no.: 281-338

Separator plate; 2 mm thick; oversized; gray

[www.wago.com/281-338](http://www.wago.com/281-338)

Item no.: 281-339

Separator plate; 2 mm thick; oversized; orange

[www.wago.com/281-339](http://www.wago.com/281-339)

## Marking accessories



Item no.: 2009-115

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

[www.wago.com/2009-115](http://www.wago.com/2009-115)

Item no.: 2009-115/000-002

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

[www.wago.com/2009-115/000-002](http://www.wago.com/2009-115/000-002)

Item no.: 2009-115/000-006

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

[www.wago.com/2009-115/000-006](http://www.wago.com/2009-115/000-006)

Item no.: 2009-115/000-007

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray

[www.wago.com/2009-115/000-007](http://www.wago.com/2009-115/000-007)

Item no.: 2009-115/000-012

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

[www.wago.com/2009-115/000-012](http://www.wago.com/2009-115/000-012)

Item no.: 2009-115/000-017

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

[www.wago.com/2009-115/000-017](http://www.wago.com/2009-115/000-017)

Item no.: 2009-115/000-023

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green

[www.wago.com/2009-115/000-023](http://www.wago.com/2009-115/000-023)

Item no.: 2009-115/000-024

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

[www.wago.com/2009-115/000-024](http://www.wago.com/2009-115/000-024)

Item no.: 209-140

Group marker carrier; gray

[www.wago.com/209-140](http://www.wago.com/209-140)

Item no.: 209-141

Group marker carrier; gray

[www.wago.com/209-141](http://www.wago.com/209-141)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH &amp; Co. KG

Hansastr. 27















32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

|  |   |  |
|--|---|--|
|    | <b>Item no.: 209-142</b><br>Group marker carrier; gray  | <a href="http://www.wago.com/209-142">www.wago.com/209-142</a>                   |
|    | <b>Item no.: 209-185</b><br>Adaptor; gray   | <a href="http://www.wago.com/209-185">www.wago.com/209-185</a>                   |
|    | <b>Item no.: 249-105</b><br>Group marker carrier; gray  | <a href="http://www.wago.com/249-105">www.wago.com/249-105</a>                   |
|    | <b>Item no.: 793-501</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; white  | <a href="http://www.wago.com/793-501">www.wago.com/793-501</a>                   |
|    | <b>Item no.: 793-501/000-002</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; yellow   | <a href="http://www.wago.com/793-501/000-002">www.wago.com/793-501/000-002</a>   |
|    | <b>Item no.: 793-501/000-005</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; red  | <a href="http://www.wago.com/793-501/000-005">www.wago.com/793-501/000-005</a>   |
|    | <b>Item no.: 793-501/000-006</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; blue   | <a href="http://www.wago.com/793-501/000-006">www.wago.com/793-501/000-006</a>   |
|    | <b>Item no.: 793-501/000-007</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; gray   | <a href="http://www.wago.com/793-501/000-007">www.wago.com/793-501/000-007</a>   |
|  | <b>Item no.: 793-501/000-012</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; orange   | <a href="http://www.wago.com/793-501/000-012">www.wago.com/793-501/000-012</a>   |
|  | <b>Item no.: 793-501/000-017</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; light green  | <a href="http://www.wago.com/793-501/000-017">www.wago.com/793-501/000-017</a>   |
|  | <b>Item no.: 793-501/000-023</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; green  | <a href="http://www.wago.com/793-501/000-023">www.wago.com/793-501/000-023</a>   |
|  | <b>Item no.: 793-501/000-024</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; violet   | <a href="http://www.wago.com/793-501/000-024">www.wago.com/793-501/000-024</a>   |
|  | <b>Item no.: 793-5501</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white          | <a href="http://www.wago.com/793-5501">www.wago.com/793-5501</a>                 |
|  | <b>Item no.: 793-5501/000-002</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; yellow | <a href="http://www.wago.com/793-5501/000-002">www.wago.com/793-5501/000-002</a> |
|  | <b>Item no.: 793-5501/000-005</b>   |  |

Subject to changes. Please also observe the further product documentation!



WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; red

[www.wago.com/793-5501/000-005](http://www.wago.com/793-5501/000-005)



**Item no.: 793-5501/000-006**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; blue

[www.wago.com/793-5501/000-006](http://www.wago.com/793-5501/000-006)



**Item no.: 793-5501/000-007**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; gray

[www.wago.com/793-5501/000-007](http://www.wago.com/793-5501/000-007)



**Item no.: 793-5501/000-012**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; orange

[www.wago.com/793-5501/000-012](http://www.wago.com/793-5501/000-012)



**Item no.: 793-5501/000-017**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; green

[www.wago.com/793-5501/000-017](http://www.wago.com/793-5501/000-017)



**Item no.: 793-5501/000-023**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; light green

[www.wago.com/793-5501/000-023](http://www.wago.com/793-5501/000-023)



**Item no.: 793-5501/000-024**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; violet

[www.wago.com/793-5501/000-024](http://www.wago.com/793-5501/000-024)

#### Insulation stop



**Item no.: 281-470**

Insulation stop; 0.08 - 0.2 mm<sup>2</sup> "s" (0.14 mm<sup>2</sup> "f-st"); 5 pieces/strip; white

[www.wago.com/281-470](http://www.wago.com/281-470)



**Item no.: 281-471**

Insulation stop; 0.25 - 0.5 mm<sup>2</sup>; 5 pieces/strip; light gray

[www.wago.com/281-471](http://www.wago.com/281-471)



**Item no.: 281-472**

Insulation stop; 0.75 - 1.5 mm<sup>2</sup>; 5 pieces/strip; dark gray

[www.wago.com/281-472](http://www.wago.com/281-472)

#### assembling



**Item no.: 209-106**

Mounting carrier; for isolated mounting on DIN 35 rails; gray

[www.wago.com/209-106](http://www.wago.com/209-106)



**Item no.: 709-153**

Cover; Type 1; suitable for cover carrier, type 1; 1 m long; transparent

[www.wago.com/709-153](http://www.wago.com/709-153)

#### Carrier rail



**Item no.: 210-112**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm

[www.wago.com/210-112](http://www.wago.com/210-112)



**Item no.: 210-113**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715

[www.wago.com/210-113](http://www.wago.com/210-113)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27


















32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)


















Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



















|  |  |  |
|--|--|--|
|    | <b>Item no.: 210-114</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715                     | <a href="http://www.wago.com/210-114">www.wago.com/210-114</a> |
|    | <b>Item no.: 210-115</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm   | <a href="http://www.wago.com/210-115">www.wago.com/210-115</a> |
|    | <b>Item no.: 210-118</b><br>Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715                   | <a href="http://www.wago.com/210-118">www.wago.com/210-118</a> |
|    | <b>Item no.: 210-196</b><br>Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored | <a href="http://www.wago.com/210-196">www.wago.com/210-196</a> |
|    | <b>Item no.: 210-197</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715                       | <a href="http://www.wago.com/210-197">www.wago.com/210-197</a> |
|    | <b>Item no.: 210-198</b><br>Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored  | <a href="http://www.wago.com/210-198">www.wago.com/210-198</a> |
|    | <b>Item no.: 210-504</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715          | <a href="http://www.wago.com/210-504">www.wago.com/210-504</a> |
|    | <b>Item no.: 210-505</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715        | <a href="http://www.wago.com/210-505">www.wago.com/210-505</a> |
|   | <b>Item no.: 210-506</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715         | <a href="http://www.wago.com/210-506">www.wago.com/210-506</a> |
|  | <b>Item no.: 210-508</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715           | <a href="http://www.wago.com/210-508">www.wago.com/210-508</a> |
| <b>ferrule</b>   |  |  |
|  | <b>Item no.: 216-106</b><br>Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; uninsulated; electro-tin plated                          | <a href="http://www.wago.com/216-106">www.wago.com/216-106</a> |
|  | <b>Item no.: 216-201</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated; white                     | <a href="http://www.wago.com/216-201">www.wago.com/216-201</a> |
|  | <b>Item no.: 216-202</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; gray                     | <a href="http://www.wago.com/216-202">www.wago.com/216-202</a> |
|  | <b>Item no.: 216-203</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; red                         | <a href="http://www.wago.com/216-203">www.wago.com/216-203</a> |
|  | <b>Item no.: 216-204</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; black                     | <a href="http://www.wago.com/216-204">www.wago.com/216-204</a> |
|  | <b>Item no.: 216-205</b><br>Ferrule; Sleeve for 2.08 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated; yellow                   | <a href="http://www.wago.com/216-205">www.wago.com/216-205</a> |
|  | <b>Item no.: 216-206</b><br>Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated; blue                      | <a href="http://www.wago.com/216-206">www.wago.com/216-206</a> |
|  | <b>Item no.: 216-241</b>   |  |

Subject to changes. Please also observe the further product documentation!









|  |  |  |
|--|--|--|
|     | Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white                             | <a href="http://www.wago.com/216-241">www.wago.com/216-241</a> |
|     | <b>Item no.: 216-242</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray | <a href="http://www.wago.com/216-242">www.wago.com/216-242</a> |
|     | <b>Item no.: 216-243</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red     | <a href="http://www.wago.com/216-243">www.wago.com/216-243</a> |
|     | <b>Item no.: 216-244</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black | <a href="http://www.wago.com/216-244">www.wago.com/216-244</a> |
|     | <b>Item no.: 216-246</b><br>Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue  | <a href="http://www.wago.com/216-246">www.wago.com/216-246</a> |
|     | <b>Item no.: 216-301</b><br>Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; insulated; electro-tin plated; yellow   | <a href="http://www.wago.com/216-301">www.wago.com/216-301</a> |
|     | <b>Item no.: 216-302</b><br>Ferrule; Sleeve for 0.34 mm <sup>2</sup> / 22 AWG; insulated; electro-tin plated; green  | <a href="http://www.wago.com/216-302">www.wago.com/216-302</a> |
| <b>tools</b>   |  |  |
|    | <b>Item no.: 210-657</b><br>Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; short   | <a href="http://www.wago.com/210-657">www.wago.com/210-657</a> |
|   | <b>Item no.: 210-658</b><br>Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; angled; short   | <a href="http://www.wago.com/210-658">www.wago.com/210-658</a> |
|  | <b>Item no.: 210-720</b><br>Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft  | <a href="http://www.wago.com/210-720">www.wago.com/210-720</a> |
| <b>Jumper</b>  |  |  |
|  | <b>Item no.: 210-103</b><br>Wire commoning chain; insulated; 50 connections; black   | <a href="http://www.wago.com/210-103">www.wago.com/210-103</a> |
|  | <b>Item no.: 210-123</b><br>Wire commoning chain; insulated; 50 connections  | <a href="http://www.wago.com/210-123">www.wago.com/210-123</a> |
|  | <b>Item no.: 249-123</b><br>Push-in type wire jumper; insulated; wire length 180 mm; Conductor cross section 0.75 mm <sup>2</sup>  | <a href="http://www.wago.com/249-123">www.wago.com/249-123</a> |
|  | <b>Item no.: 249-125</b><br>Push-in type wire jumper; insulated; wire length 60 mm; Conductor cross section 0.75 mm <sup>2</sup>   | <a href="http://www.wago.com/249-125">www.wago.com/249-125</a> |
|  | <b>Item no.: 249-126</b><br>Push-in type wire jumper; insulated; wire length 110 mm; Conductor cross section 0.75 mm <sup>2</sup>  | <a href="http://www.wago.com/249-126">www.wago.com/249-126</a> |
|  | <b>Item no.: 249-127</b><br>Push-in type wire jumper; insulated; wire length 250 mm; Conductor cross section 0.75 mm <sup>2</sup>  | <a href="http://www.wago.com/249-127">www.wago.com/249-127</a> |
|   | <b>Item no.: 281-402</b><br>Adjacent jumper; insulated; IN = IN terminal block; gray   | <a href="http://www.wago.com/281-402">www.wago.com/281-402</a> |

Subject to changes. Please also observe the further product documentation!

|  |  |  |
|--|--|--|
|    | <b>Item no.: 281-409</b><br>Alternate jumper; insulated; IN = IN terminal block; gray  | <a href="http://www.wago.com/281-409">www.wago.com/281-409</a> |
|    | <b>Item no.: 281-422</b><br>Adjacent jumper; insulated; IN = IN terminal block; yellow-green   | <a href="http://www.wago.com/281-422">www.wago.com/281-422</a> |
|    | <b>Item no.: 281-482</b><br>Comb-style jumper bar; insulated; 2-way; IN = IN terminal block; gray  | <a href="http://www.wago.com/281-482">www.wago.com/281-482</a> |
|    | <b>Item no.: 281-483</b><br>Comb-style jumper bar; insulated; 3-way; IN = IN terminal block; gray  | <a href="http://www.wago.com/281-483">www.wago.com/281-483</a> |
|    | <b>Item no.: 281-485</b><br>Comb-style jumper bar; insulated; 5-way; IN = IN terminal block; gray  | <a href="http://www.wago.com/281-485">www.wago.com/281-485</a> |
|    | <b>Item no.: 281-490</b><br>Comb-style jumper bar; insulated; 10-way; IN = IN terminal block; gray   | <a href="http://www.wago.com/281-490">www.wago.com/281-490</a> |
|    | <b>Item no.: 281-492</b><br>Alternate comb-style jumper bar; insulated; 2-way; IN = IN terminal block; gray  | <a href="http://www.wago.com/281-492">www.wago.com/281-492</a> |
|    | <b>Item no.: 709-110</b><br>Wire commoning chain; insulated; 4 connections; 3 x 110 mm; black  | <a href="http://www.wago.com/709-110">www.wago.com/709-110</a> |
|    | <b>Item no.: 709-111</b><br>Wire commoning chain; insulated; 3 connections; 2 x 120 mm; black  | <a href="http://www.wago.com/709-111">www.wago.com/709-111</a> |
|   | <b>Item no.: 709-112</b><br>Wire commoning chain; insulated; 3 connections; 2 x 170 mm; black  | <a href="http://www.wago.com/709-112">www.wago.com/709-112</a> |
|  | <b>Item no.: 781-452</b><br>Staggered jumper; insulated; from 1 to 2; Spacing: 6 mm; gray  | <a href="http://www.wago.com/781-452">www.wago.com/781-452</a> |
|  | <b>Item no.: 781-453</b><br>Staggered jumper; insulated; from 1 to 3; Spacing: 6 mm; gray  | <a href="http://www.wago.com/781-453">www.wago.com/781-453</a> |
|  | <b>Item no.: 781-454</b><br>Staggered jumper; insulated; from 1 to 4; Spacing: 6 mm; gray  | <a href="http://www.wago.com/781-454">www.wago.com/781-454</a> |
|  | <b>Item no.: 781-455</b><br>Staggered jumper; insulated; from 1 to 5; Spacing: 6 mm; gray  | <a href="http://www.wago.com/781-455">www.wago.com/781-455</a> |
|  | <b>Item no.: 781-456</b><br>Staggered jumper; insulated; from 1 to 6; Spacing: 6 mm; gray  | <a href="http://www.wago.com/781-456">www.wago.com/781-456</a> |
| <b>check</b>   |  |  |
|  | <b>Item no.: 209-170</b><br>Test plug adapter; 8.3 mm wide; for 4 mm Ø test plugs; suitable for 1.5 mm <sup>2</sup> - 10 mm <sup>2</sup> tbs; gray | <a href="http://www.wago.com/209-170">www.wago.com/209-170</a> |
|  | <b>Item no.: 249-144</b><br>L-type test plug module; modular; with spring-loaded contact pin; Center module; 2,50 mm <sup>2</sup> ; gray           | <a href="http://www.wago.com/249-144">www.wago.com/249-144</a> |
|  | <b>Item no.: 249-146</b><br>L-type spacer module; modular; e.g., bridging commoned terminal blocks; gray   | <a href="http://www.wago.com/249-146">www.wago.com/249-146</a> |

Subject to changes. Please also observe the further product documentation!

|  |   |  |
|--|---|--|
|  | <b>Item no.: 249-147</b><br>B-type test plug module; modular; 2,50 mm <sup>2</sup> ; gray   | <a href="http://www.wago.com/249-147">www.wago.com/249-147</a> |
|  | <b>Item no.: 249-148</b><br>B-type spacer module; modular; e.g., for bridging commoned terminal blocks; gray  | <a href="http://www.wago.com/249-148">www.wago.com/249-148</a> |
|  | <b>Item no.: 280-404</b><br>Test plug adapter; 5 mm wide; for test plug 210-137 (2.3 mm Ø); suitable for 1.5 mm <sup>2</sup> - 4 mm <sup>2</sup> tbs; gray                        | <a href="http://www.wago.com/280-404">www.wago.com/280-404</a> |
|  | <b>Item no.: 281-418</b><br>Test plug module; modular; suitable for all WAGO 281, 776, 777 and 781 series rail-mounted terminal blocks with jumper slots in the current bar; gray | <a href="http://www.wago.com/281-418">www.wago.com/281-418</a> |
|  | <b>Item no.: 281-419</b><br>Spacer module; modular; bridging commoned terminal blocks; gray   | <a href="http://www.wago.com/281-419">www.wago.com/281-419</a> |
| <b>General accessories</b>   |   |  |
|  | <b>Item no.: 281-407</b><br>Test plug; 6 mm wide; Nominal current 24 A; for 0.08 mm <sup>2</sup> - 2.5 mm <sup>2</sup> ; 2,50 mm <sup>2</sup> ; gray                              | <a href="http://www.wago.com/281-407">www.wago.com/281-407</a> |

## Downloads

### Documentation

#### Bid Text

|                        |              |                |          |
|------------------------|--------------|----------------|----------|
| 281-657<br>doc - Datei | Feb 28, 2017 | doc<br>24.6 kB | Download |
| 281-657<br>X81 - Datei | Feb 19, 2019 | xml<br>3.1 kB  | Download |

#### Additional Information

|                        |             |               |          |
|------------------------|-------------|---------------|----------|
| Technical explanations | Apr 3, 2019 | pdf<br>2.1 MB | Download |
|------------------------|-------------|---------------|----------|

## CAD/CAE-Data

### CAD data

|                      |     |          |
|----------------------|-----|----------|
| 2D/3D Models 281-657 | URL | Download |
|----------------------|-----|----------|

### CAE data

|                           |     |          |
|---------------------------|-----|----------|
| EPLAN Data Portal 281-657 | URL | Download |
| WSCAD Universe 281-657    | URL | Download |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)


Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

## Installation Notes

### Assembly



By snapping a ground conductor terminal block onto the carrier rail, a direct electrical connection is automatically made to the rail.

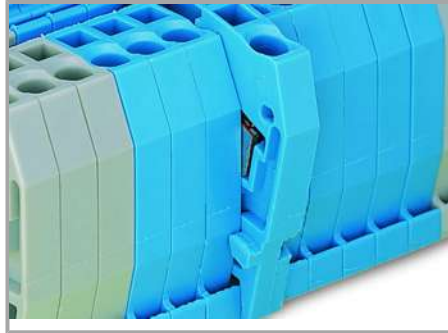

Quick assembly keys prevent reverse mounting.



Removing a terminal block from the assembly.

### Inserting a conductor




CAGE CLAMP® connection

Inserting a conductor.



CAGE CLAMP® connection

Inserting a conductor.

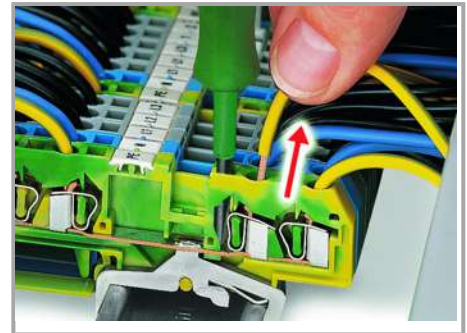

CAGE CLAMP® connection  
Removing a conductor.


With ferruled conductors, it is necessary to use a terminal block one size larger than the conductor's nominal cross-section.

Subject to changes. Please also observe the further product documentation!




Inserting insulation stops.


### Jumpered

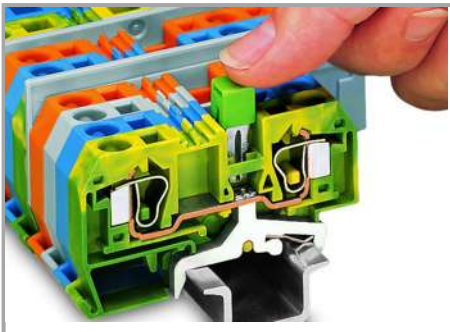

Commoning ground conductor terminal blocks with through terminal blocks is possible in one direction only (via rear side of terminal block) using adjacent jumpers. In addition to the required marking of these blocks, use yellow-green adjacent jumpers.

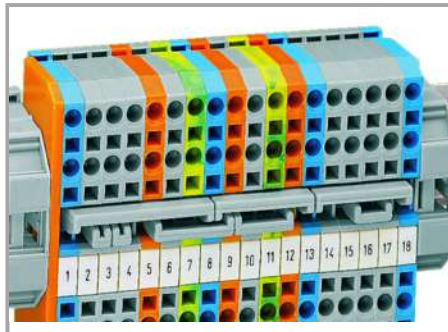

Staggered jumpers for sophisticated circuit requirements – push jumpers down until fully inserted.

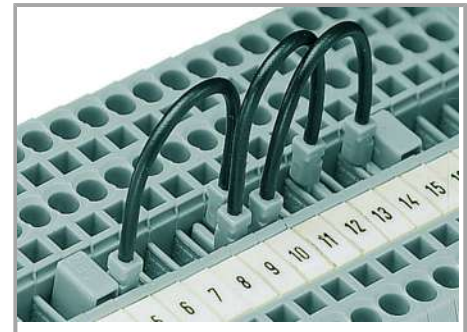

### Wire jumpers

When installing machines or control systems, it is often necessary to make an additional connection between two terminal blocks that are not next to each other on the rail. In such cases, WAGO's touch-proof, push-in type wire jumpers are the ideal solution.

These jumpers are compatible with the following rail-mount terminal blocks:

- 279 Series (1.5 mm<sup>2</sup>/16 AWG),
- 
- 280/775/780 Series (2.5 mm<sup>2</sup>/14 AWG)


Subject to changes. Please also observe the further product documentation!



- 
- 281/769/776/777/781 and 880 Series (4 mm<sup>2</sup>/12 AWG)
- 

They are available in three conductor lengths (60, 110 and 250 mm), allowing up to 60 terminal blocks to be commoned depending on their width (see table on the right).

Compared with the 279 Series, the 280/775/780 and 281/776/777/781 Series can also accommodate two wire jumpers, allowing the use of commoning chains. Furthermore, the 280/769/775/780/880 and 281/776/777/781 Series allow both wire jumper and adjacent jumper to be simultaneously plugged into a same terminal block.

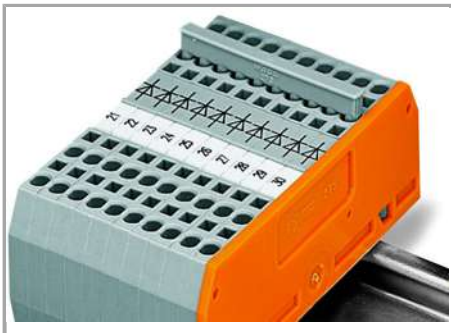

Commoning using comb-style jumper bars. Push comb-style jumper bars down until fully inserted.

#### Testing

Subject to changes. Please also observe the further product documentation!



Testing with a test plug




Testing with a test plug

(picture shows a test plug fitted with CAGE CLAMP®).

(picture shows 209-170 Test Plug Adapter).

### Marking

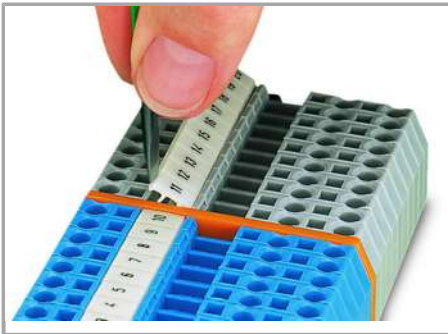

Marking via WMB Multi Marking System.

Subject to changes. Please also observe the further product documentation!