
Flat cable; Cca; 5G 2.5 mm² + 2 x 1.5 mm²; halogen-free; 3L + N + PE + 2

buses; 0.6/1 kV; 2,50 mm²; violet

www.wago.com/897-262



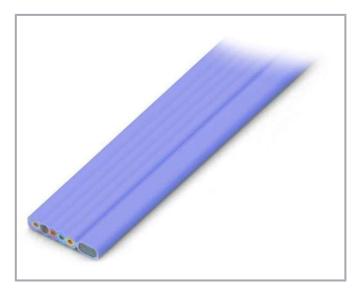

Item description

Flat cable WINSTA® IDC 5-pole

Choose tried-and-tested sustainability for the installation at your construction site: The flat cable from the WINSTA® IDC product line. You can rely on the quality of WINSTA® components from WAGO for your electrical installation accessories too. Anyone who needs to take into account technical safety requirements for fire protection reasons for electrical installation should use only top quality components. Our product satisfies the official safety standards of fire class C. Eliminating halogens as an additive in the production of this flat cable noticeably improves fire safety and reduces environmental contamination.

WINSTA® IDC solutions for your electrical installation - maintenance-free

WINSTA® is the pluggable connection system that is ideally tailored to the strict requirements of electrical installation. It ensures error-free installation of cables and components, quickly and reliably. Choose durability and quality – the WINSTA® IDC accessory with fire class C from WAGO makes the installation of electrical components significantly easier.

products perfectly tailored to your requirements guarantee safe use

Subject to changes. Please also observe the further product documentation!

WAGO Corporation Germantown, WI 53022

Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222

Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/897-262



rapid, structured electrical installation

Data

Electrical data

IEC Approvals

Legend (ratings)	(III / 3) ≙ Overvoltage category III / Pollution degree 3
Rated voltage	0.6 / 1 kV

Connection data

Connection 1

Number of poles	5
Wire cross-section	2.5 mm²

Connection 2

Pole number 2	2
Wire cross-section (2)	1.5 mm ²

Physical data

Width	31.9 mm / 1.26 inch
Height	6.1 mm / 0.24 inch

Mechanical data

Variable coding	No	
-----------------	----	--

Material data

Note (material data)	Information on material data can be found here
Color	violet
Fire class per EN 50575	C _{ca}
Fire load	30 MJ
Halogen-free	Yes
Weight	400 g
Copper weight of the pipe	0.149 kg/m

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO Corporation Germantown, WI 53022

We are always happy to take your call at +49 (571) 887-44222.

Do you have any questions about our products?

Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222

Email: info.us@wago.com | Web: www.wago.us

www.wago.com/897-262



Environmental requirements

Processing temperature	5 40 °C
Continuous operating temperature	-25 +90 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data

Product Group	20 (WINSTA)
PU (SPU)	1 Stück
Packaging type	box
Country of origin VKOrg Germany	СН
GTIN	4045454267261
Customs tariff number VKOrg Germany	85444995000

Optional accessories

Mounting

Mounting accessories



Item no.: 897-878
Fixing clamp for screw mounting; plastic; gray

www.wago.com/897-878

Cover

General accessories



Item no.: 897-900

Insulating tape for flat cable; 3-pole; black

www.wago.com/897-900

Cover

Item no.: 897-260

Flat cable end cover; for flat cable 5 x 2.5 mm² + 2 x 1.5 mm²; Plastic; transparent

www.wago.com/897-260

Tools

Cable stripper



Item no.: 897-971 Stripping pliers

www.wago.com/897-971

Downloads Documentation

Bid Text

 897-262
 2019 Feb 19
 xml
 Download

 X81 - Datei
 2.7 kB

Subject to changes. Please also observe the further product documentation!

WAGO Corporation

Germantown, WI 53022

Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222

Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/897-262



Download

897-262 2015 Jan 9 doc 23.0 kB

CAD files

doc - Datei

CAE data

WSCAD Universe 897-262 URL Download

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 897-262 URL Download

Flat cable; Cca; $5G 2.5 \text{ mm}^2 + 2 \times 1.5 \text{ mm}^2$; halogen-free; 3L + N + PE + 2 buses; 0.6/1

kV; 2,50 mm²; violet

Installation Notes

Product family

WINSTA® IDC

Show all products from the family

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO Corporation Germantown, WI 53022 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222

Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.